



www.diveboutik.com

i770R

Dive Computer Owner's Manual

NOTICES

LIMITED TWO-YEAR WARRANTY

For warranty details and to register your product, refer to www.aqualung.com.

COPYRIGHT NOTICE

This owner's manual is copyrighted, all rights are reserved. It may not, in whole or in part, be copied, photocopied, reproduced, translated, or transferred to any other form without prior consent in writing from Aqua Lung.

i770R Dive Computer Owner's Manual, Doc. No. 12-7892
© Aqua Lung International, Inc., 2018
Vista, CA USA 92081

TRADEMARK, TRADE NAME, AND SERVICE MARK NOTICE

Aqua Lung, the Aqua Lung logo, i770R, the i770R logo, Gas Time Remaining (GTR), Diver Replaceable Batteries, Graphic Diver Interface, Pre-Dive Planning Sequence (PDPS), SmartGlo, Set Point, Control Console, Turn Gas Alarm, and Aqua Lung computer Interface (ALI) are all registered and unregistered trade-marks, trade names, and service marks of Aqua Lung. All rights are reserved.

PATENT NOTICE





U.S. Patents have been issued to protect the following design features: Free dive mode calculating nitrogen loading (U.S. Patent no. 8,600,701 & 9,254,900 & 9,733,227), Systems and Methods for Dive Computers with Remote Upload Capabilities (U.S. Patent no. 9,443,039), Dive Computer with Free Dive Mode and/or Wireless Data Transmission (U.S. Patent no. 7,797,124).

DECOMPRESSION MODEL

The program within the i770R simulates the absorption of inert gases into the body by using a mathematical model. This model is merely a way to apply a limited set of data to a large range of experiences. The i770R dive computer model is based upon the latest research and experiments in decompression theory. Still, using the i770R, just as using any other No Decompression Tables, is no guarantee of avoiding decompression sickness, i.e. "the bends". Every diver's physiology is different, and can even vary from day to day. No machine can predict how your body will react to a particular dive profile.

DANGERS, WARNINGS, CAUTIONS, AND NOTES

Pay attention to the following symbols when they appear throughout this document. They denote important information and tips.

-  **DANGERS:** are indicators of important information that if ignored would lead to severe injury or death.
-  **WARNINGS:** are indicators of important information that if ignored could lead to severe injury or death.
-  **CAUTIONS:** indicate information that will help you avoid faulty assembly, leading to an unsafe condition.
-  **NOTES:** indicate tips and advice that can inform of features, aid assembly, or prevent damage to the product.

RESPONSIBLE COMPUTER DIVING

- Always plan each dive.
- Always limit your dive to the level of your training and experience.
- Always make your deepest dive first.
- Always make the deepest part of every dive first.
- Check your computer often during the dive.
- Do a safety stop on every dive.
- Allow adequate surface interval between each dive.
- Allow adequate surface interval between each day of diving (12 Hours or until your computer clears).
- Read and understand this manual thoroughly before using the i770R.



WARNINGS:

- This manual is to be used in conjunction with the Aqua Lung Dive Computer Safety and Reference Manual, Doc. 12-7835.
- The i770R is intended for use by recreational divers who have successfully completed a internationally recognized course in scuba diving (for air use) and diving with enriched nitrogen-oxygen (nitrox) breathing gas mixtures (for nitrox use).
- It must not be used by untrained persons who may not have knowledge of the potential risks and hazards of scuba diving and diving with enriched nitrogen-oxygen (nitrox) mixtures.
- You must obtain scuba certification in diving with enriched nitrogen-oxygen mixtures (nitrox) before using the i770R for nitrox diving.
- This product is not specifically designed for compatibility with military, hazmat, nuclear plant, heavy industrial, extreme depth exceeding 100 m/330 ft, or similar extreme applications. Neither Aqua Lung International or Pelagic make any guarantees to the suitability of this product for such applications. Use in such applications may void your warranty or put your safety at risk.
- As with all underwater life support equipment, improper use or misuse of this product can cause serious injury or death.
- Never participate in sharing or swapping of a dive computer.
- Conduct your dives in such a manner so as to insure that you continuously check the computer's proper function.
- Read and understand this owner's manual completely before diving with the i770R.
- If you do not fully understand how to use this dive computer or if you have any questions, you should seek instruction in its use from your authorized Aqua Lung dealer before you utilize this product.
- If your i770R stops working for any reason while operating, it is important that you have anticipated this possibility and are prepared for it. This is an important reason for not pushing the tables, oxygen exposure limits, or entering decompression without proper training. If you dive in situations where your trip would be ruined or your safety would be jeopardized by losing the use of your i770R, a backup instrument system is highly recommended.
- Each numeric and graphic display represents a unique piece of information. It is imperative that you understand the formats, ranges, and values of the information represented to avoid any possible misunderstanding that could result in error.
- Remember that technology is no substitute for common sense. The dive computer only provides the person using it with data, not the knowledge to use it. Remember also that the dive computer does not actually measure and test the composition of your body tissue and blood. Using an Aqua Lung dive computer, just as using any other Decompression Tables, is no guarantee of avoiding decompression sickness. Every diver's physiology is different and can even vary from day to day. No machine can predict how your body will react to a particular dive profile.
- Diving at high altitude requires special knowledge of the variations imposed upon divers, their activities, and their equipment by the decrease in atmospheric pressures. Aqua Lung recommends completion of a specialized altitude training course by a recognized training agency prior to diving in high altitude lakes or rivers.
- Repetitive dives in a series should only be conducted at the same altitude as that of the first dive of that series. Repetitive dives made at a different altitude will result in an error equal to the difference in barometric pressure, and possibly a false dive mode with erroneous data.
- If the i770R is activated at an elevation higher than 4,270 m (14,000 ft), it will immediately shutdown.
- Decompression diving or diving deeper than 39 m (130 ft) will greatly increase your risk of decompression sickness. This should only be attempted by those properly trained and certified in decompression diving. It is important to completely understand the features, functions, and specifically the limitations of the i770R. Based on this the diver must decide if the i770R is suitable for the dive activities and dive profiles being planned.
- Using an i770R is no guarantee of avoiding decompression sickness.
- The i770R enters Violation Mode when a situation exceeds its capacity to predict an ascent procedure. These dives represent gross excursions into decompression that are beyond the boundaries and spirit of the i770R's design. If you are following these dive profiles, Aqua Lung advises that you should not use an i770R.

-
- If you exceed certain limits, the i770R will not be able to help you get safely back to the surface. These situations exceed tested limits and can result in loss of some functions for 24 hours after the dive in which a violation occurred.
 - If you exceed certain limits, the i770R will not be able to help you get safely back to the surface. These situations exceed tested limits and can result in loss of some functions for 24 hours after the dive in which a violation occurred.

www.diveboutik.com

CONTENTS

NOTICES	2	MORE DATA	37
RESPONSIBLE COMPUTER DIVING	2	DIVE MAIN MENU	38
WARNINGS:	3	TRANSMITTERS	39
		SET ALARMS	41
GETTING STARTED	7	SET UTILITIES	45
BASICS	8	1. WATER TYPE	45
POWER	8	2. UNITS	46
CHARGING THE BATTERY	8	3. SAMPLE RATE	47
ACTIVATION	9	4. DEEP STOP	48
DISPLAY ICONS	10	5. SAFETY STOP	48
BUTTONS	11	6. CONSERVATIVE	49
BUTTON FUNCTIONS	12	PLAN	50
		SET GAS	51
HOME MENU	14	DIVE OPERATION	53
HOME MENU	15	INITIATING A DIVE	54
MY INFO	15	NO DECOMPRESSION DIVE MAIN	54
DC (DIVE COMPUTER) INFO	16	MORE DIVE DATA	55
SETUP MENU	16	EARMARK	55
1. DISPLAY	17	DIVE MENU	55
A. Brightness	17	1. GAS (& TRANSMITTER) SWITCH	56
B. Auto Dim	18	2. DISPLAY	57
C. Add PO ₂ /MOD	18	3. DS (DEEP STOP) PREVIEW	58
2. DATE-TIME	19	DEEP STOP MAIN	58
A. Date Format	19	SAFETY STOP MAIN	58
B. Date	20	SURFACING	59
C. Time Format	20	COMPLICATIONS	60
D. Time	21	DECOMPRESSION	60
3. LANGUAGE	21	DECOMPRESSION ENTRY	60
4. BLUETOOTH	22	GAS SWITCH WARNING	60
MODE	23	DECOMPRESSION STOP MAIN	61
HISTORY	23	CONDITIONAL VIOLATION (CV)	61
LOG	24	DELAYED VIOLATION 1 (DV 1)	62
		DELAYED VIOLATION 2 (DV 2)	62
DIVE FEATURES	27	DELAYED VIOLATION 3 (DV 3)	63
DTR (DIVE TIME REMAINING)	28	VIOLATION GAUGE MODE DURING A DIVE	63
NO DECOMPRESSION	28	VIOLATION GAUGE MODE ON THE SURFACE	63
O ₂ TIME (OXYGEN TIME REMAINING)	28	HIGH PO ₂	64
BAR GRAPHS	29	Alarm	64
ASC BAR GRAPH	29	PO ₂ During Decompression	64
N ₂ BAR GRAPH	29	HIGH O ₂ SAT (OXYGEN SATURATION)	64
ALGORITHM	29	Warning	64
CONSERVATIVE FACTOR	29	Alarm	65
DEEP STOP	29	Warning During Decompression	65
SAFETY STOP	30	Alarm During Decompression	65
LOW BATTERY WHILE ON THE SURFACE	30	Alarm On Surface	66
LOW BATTERY DURING A DIVE	31		
LOW TMT (TRANSMITTER) BATTERY	32	GAUGE MODE	67
AUDIBLE ALARM	33	ON THE SURFACE BEFORE A DIVE	68
PROXIMITY OF THE TRANSMITTERS AND i770R	34	GAUGE SURF MAIN MENU	69
		INITIATING A DIVE	70
DIVE SURFACE MODE	35	GAUGE DIVE MAIN	70
ON THE SURFACE BEFORE A DIVE	36	GAUGE MORE DIVE DATA	71
LAST DIVE DATA	37	RUN TIMER	71

GAUGE DIVE MENU	71
DELAYED VIOLATION 3 (DV3)	72

FREE MODE 73

FREE DIVE MODE DETAILS	74
ON THE SURFACE BEFORE A DIVE	75
FREE SURF MAIN MENU	76
CDT (COUNTDOWN TIMER) SETUP	77
SET MENU	78
1. WATER TYPE	78
2. UNITS	79
3. RTI AL (Repeating Time Interval Alarm)	79
4. DEPTH AL (Alarm)	80
INITIATING A DIVE	81
FREE DIVE MAIN	81
MORE DIVE DATA	82
N2 (NITROGEN) WARNING	82
FREE VIOLATION ALARM	82

COMPASS MODE 83

COMPASS DISPLAY ICONS	84
OVERVIEW	85
COMPASS MAIN MENU	86
CALIBRATE	87
SET DECLINATION	88
SET REFERENCE HEADING	89
EARMARK	90
ALARMS	90
COMPASS ON MAIN SCREEN	90

REFERENCE 91

UPLOADING/DOWNLOADING	92
CARE AND CLEANING	92
SERVICE	93
CHANGING THE STRAPS	94

TECHNICAL DATA 97

NO DECOMPRESSION TIME LIMITS	98
OXYGEN EXPOSURE LIMITS	99
ALTITUDE LEVELS	99
SPECIFICATIONS	100
ABBREVIATIONS/TERMS	103
EUROPEAN UNION DIRECTIVES	103
AQUA LUNG DISTRIBUTORS	104

GETTING STARTED

BASICS

Welcome to your new i770R. The i770R is an easy to use dive computer utilizing a three button interface. Divers may choose between three modes of functionality consisting of Dive, Gauge, and Free Mode. Though the i770R is easy to use, you will get the most out of your new i770R if you take some time to familiarize yourself with its displays and operation. Information has been organized into easy to follow sections to aid you in learning all you need to know. There is also a glossary at the end of this guide for any terms that may sound unfamiliar.

POWER


The i770R housing contains a rechargeable lithium battery similar to that of a cell phone. The level of battery charge is displayed on the primary screens. Charge the battery fully before first use. With a full charge you can expect to average 30 dive hours at 100% brightness before needing to recharge.

Keep in mind that the i770R screen is the biggest draw of power. Using full brightness settings will reduce the interval between charges. This setting can be fully customized to your preferences in the i770R settings. Additionally, the i770R screen will sleep after 10 minutes of inactivity to conserve power. Pressing any button will wake the screen up again.

CHARGING THE BATTERY

Use only the included Aqua Lung cable to charge the battery. This process will take an average of 1.5 -2 hours with a wall charger and 3 - 4 hours charging from a personal computer's USB port.

NOTE: It is recommended that you charge your i770R before any extended storage to avoid loss of battery performance or shortened battery life.

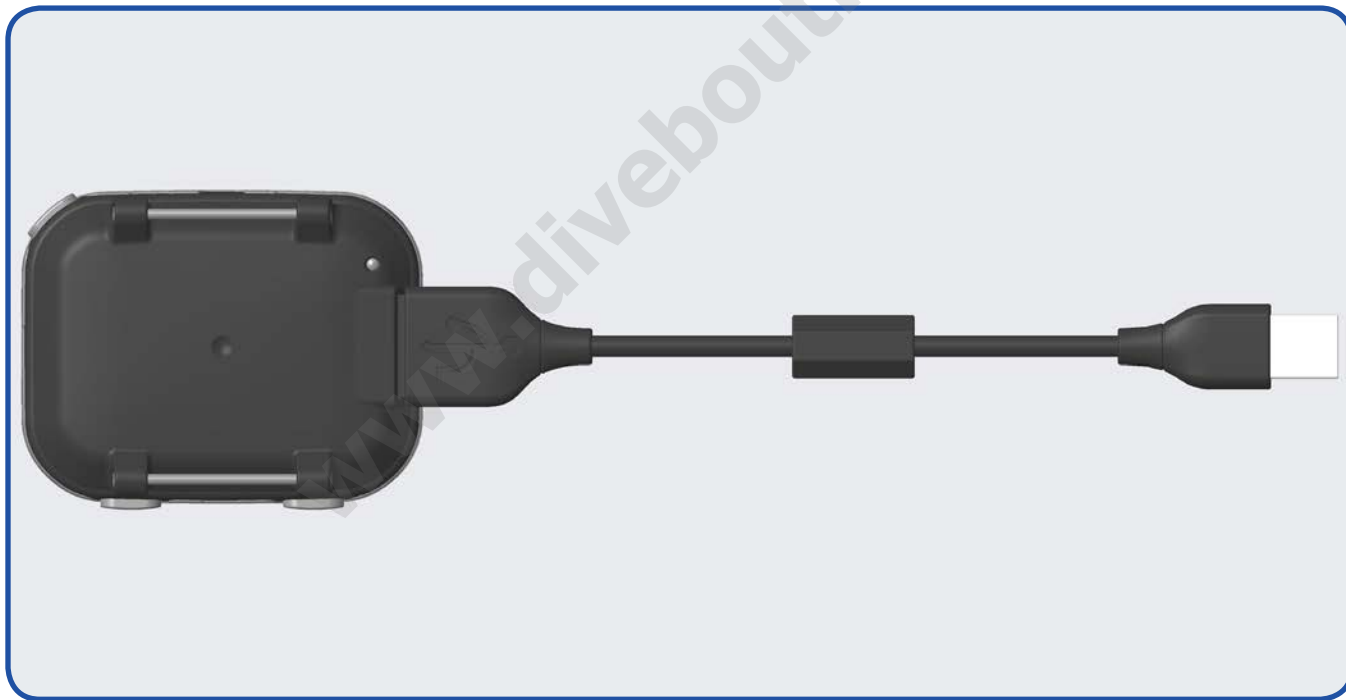

ACTIVATION

To activate the i770R, press and release any button. The i770R will also turn on if its metal contacts become wet and you descend below 1.5 m (5 ft) for 5 seconds.


- Upon activation, the unit will display the Activation screen and perform a diagnostic check. The i770R checks the display and voltage at this time to ensure that everything is within tolerance.
- It will also check ambient barometric pressure, and calibrate present depth as 0 m (ft). When at 916 m (3001 ft), or higher, it will adjust for the higher altitude.
- After the Diagnostic check, the i770R will display the Home Menu (or Dive Main if wet activation).

NOTE: The i770R has no off button or command. If no buttons are pressed or dives made, the unit will enter Sleep Mode after 10 minutes. Within 2 hours of no buttons being pressed or dives made, the unit will shut itself off. However, the i770R will stay on for a 24 hour period after a dive, counting down FLY (time to fly) and DESAT (desaturation time) if a dive has been made.




ACTIVATION SCREEN



HOME MENU SCREEN

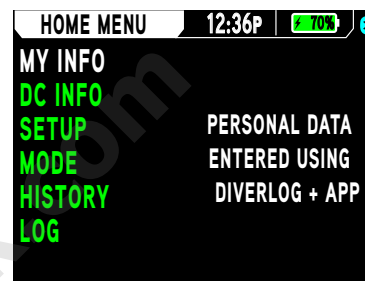

DISPLAY ICONS



SYMBOL	MEANING
M or FT	DEPTH (METERS OR FEET)
NO-DECO	NO DECOMPRESSION TIME (DIVE TIME REMAINING)
O2 TIME	O2 SATURATION TIME (DIVE TIME REMAINING)
DIVE-T	DIVE TIME
GAS 1	GAS/TRANSMITTER # (1, 2, OR 3)
GTR	GAS TIME REMAINING
BAR or PSI	VALUE IS GAS PRESSURE IN BAR OR PSI
F02: AIR or F02: 32%	GAS MIX (AIR OR 21 - 100%)
	BATTERY CONDITION IS GOOD (SURFACE ONLY)
	LOW BATTERY WARNING
	LOW BATTERY ALARM
SURF-T	SURFACE TIME
CDT	COUNTDOWN TIMER (FREE MODE)
RUNTIME	RUN TIMER (GAUGE MODE)
M MAX or FT MAX	MAXIMUM DEPTH (METERS OR FEET)









BUTTONS


The i770R utilizes 3 control buttons called the ▼ (Down), ▲ (UP), and ◎ (Select) buttons. They allow you to select mode options and access specific information. They are also used to enter settings and acknowledge the audible alarm.

Pressing different combinations of these buttons will navigate through different menus and options of the i770R. The symbols in the table below will illustrate how to proceed through the menus.

SYMBOL	MEANING
	PRESS BUTTON LESS THAN 2 SECONDS
	HOLD BUTTON GREATER THAN 2 SECONDS

BUTTON FUNCTIONS

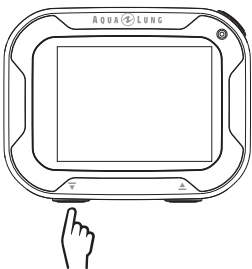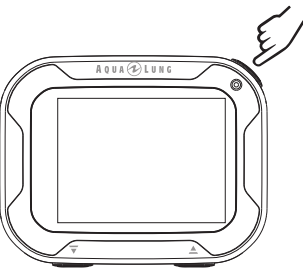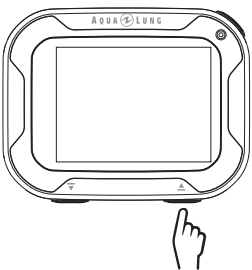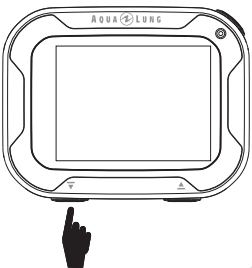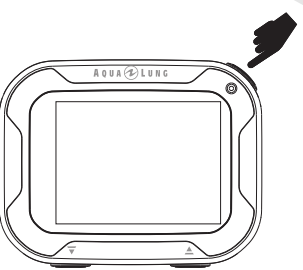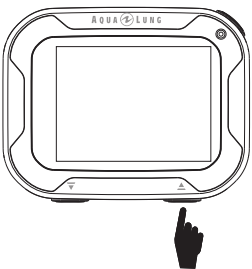ACTION	FUNCTION
	<ul style="list-style-type: none"> • to access main menus from main screens • to step (scroll) down the screen • to decrease setting value • to toggle or change setpoints
	<ul style="list-style-type: none"> • to select, save an option or setting • to start/stop Run Timer (Gauge Mode), Countdown Timer (Free Mode), and Chrono (Compass Mode) • to acknowledge alarms
	<ul style="list-style-type: none"> • to access alternate (More Dive Data, Last Dive Data, and More Data) screens • to step (scroll) up the screen • to increase setting value • to toggle or change setpoints • to set a reference heading in Compass Mode
	<ul style="list-style-type: none"> • to exit a menu directly to the Main screen • to access Home Menu from Main screens • to apply an Earmark, during dives
	<ul style="list-style-type: none"> • to switch between Compass Mode and the active diving mode, while on the Main screen • to exit or step back to the previous screen or setting
	<ul style="list-style-type: none"> • to increase setting values at a faster rate • to add compass to the Main screen • to remove heading from the compass while in Compass Mode

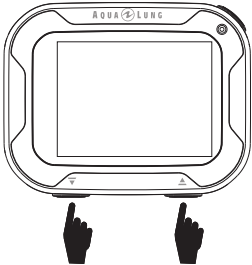
ACTION	FUNCTION
	<ul style="list-style-type: none">• to reset Run Timer (Gauge Mode) Countdown Timer (Free Mode), and Chrono (Compass Mode)

www.diveboutik.com

HOME MENU


HOME MENU

This is a base menu that provides access to general items common to all the operating dive modes. When the i770R is activated manually, this is the first screen you will see after the Activation screen. When ready to dive, select Dive, Gauge, or Free Mode from the Mode Submenu.

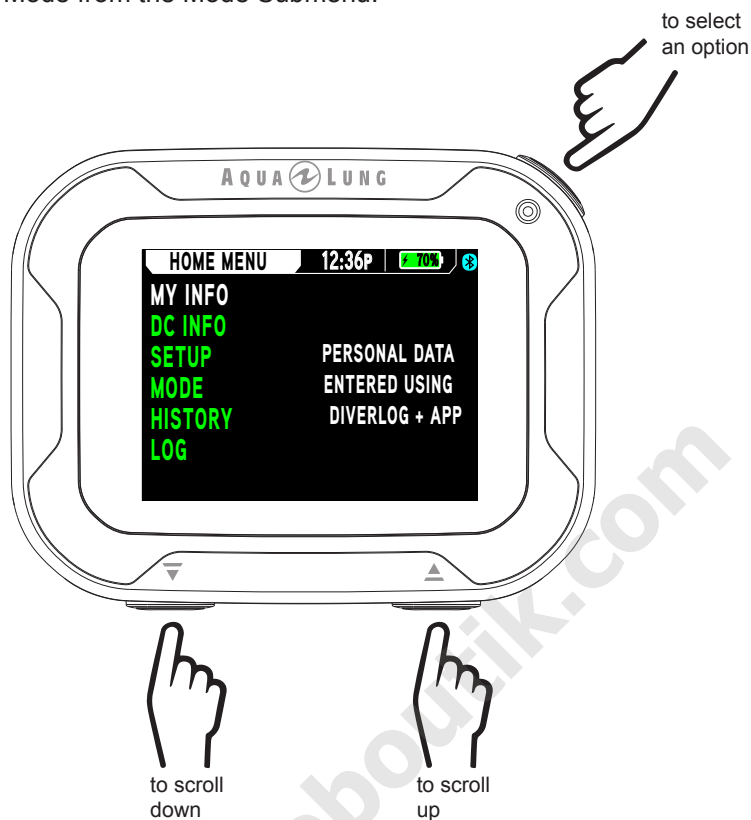


MY INFO

This screen displays personal information. Information must be entered using the Diverlog + application interface.

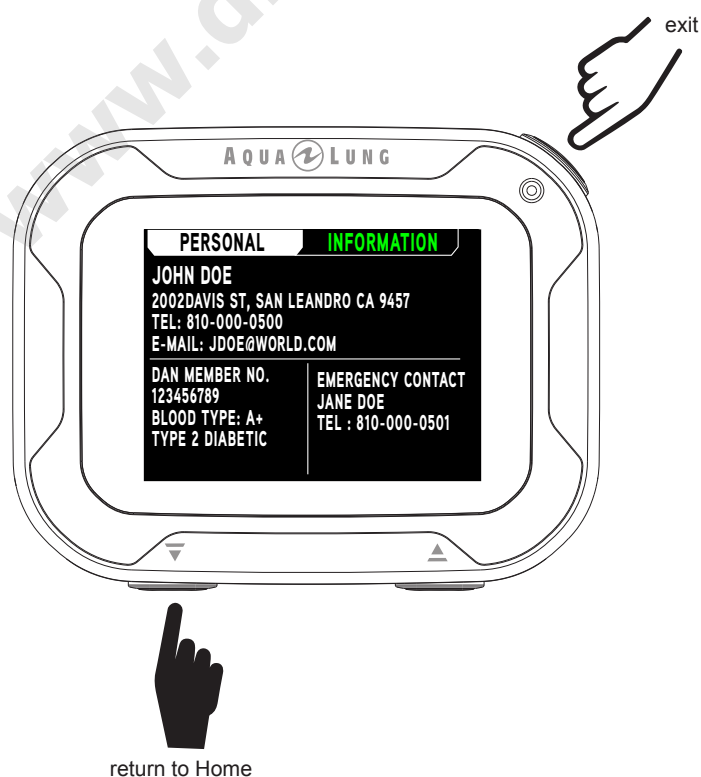


DC (DIVE COMPUTER) INFO

Information displayed on the DC Info screen should be recorded and kept with your sales receipt. It will be required in the event that your i770R requires factory service.

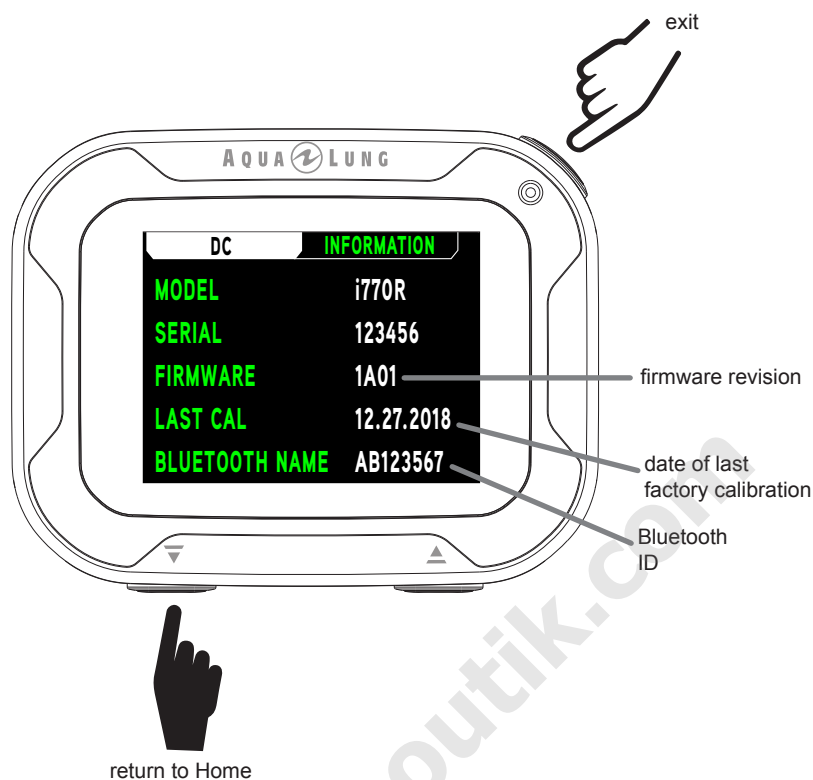


SETUP MENU

This screen allows you to adjust the Display, Date-Time, Language, and Bluetooth® features.

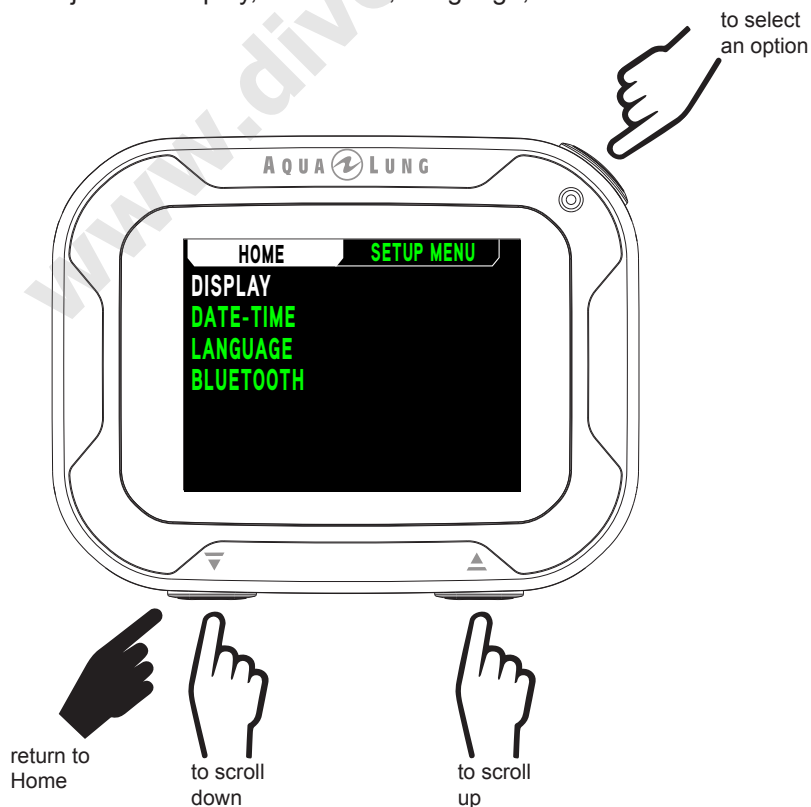


1. DISPLAY

This submenu allows you to adjust Brightness, Auto Dim, and Add PO2/MOD settings.

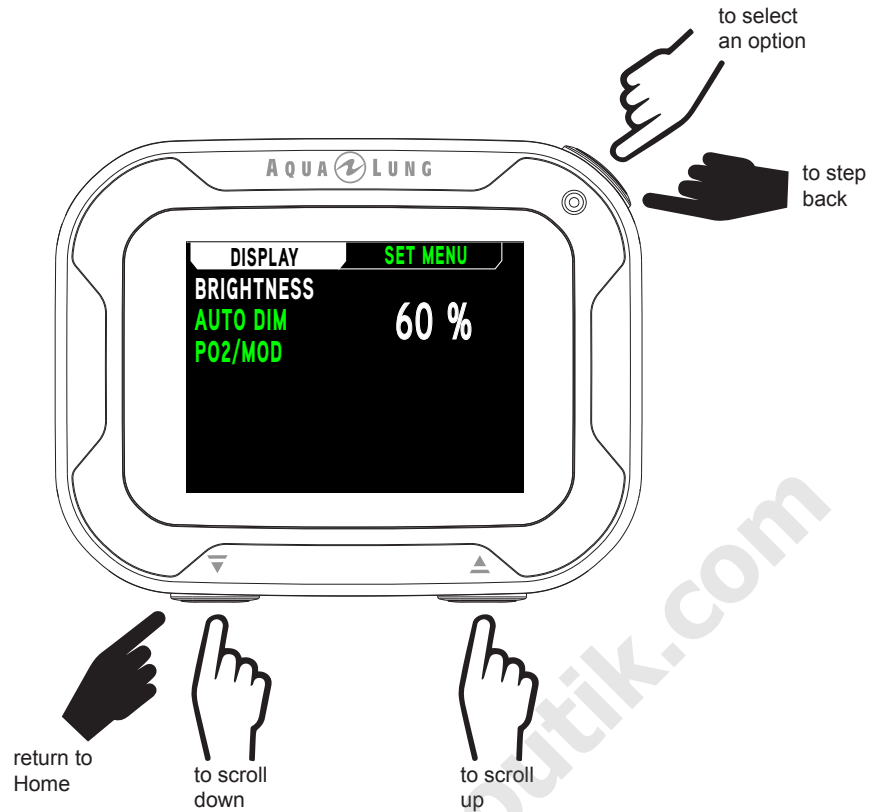


A. Brightness

This submenu allows you to adjust the brightness of the screen.

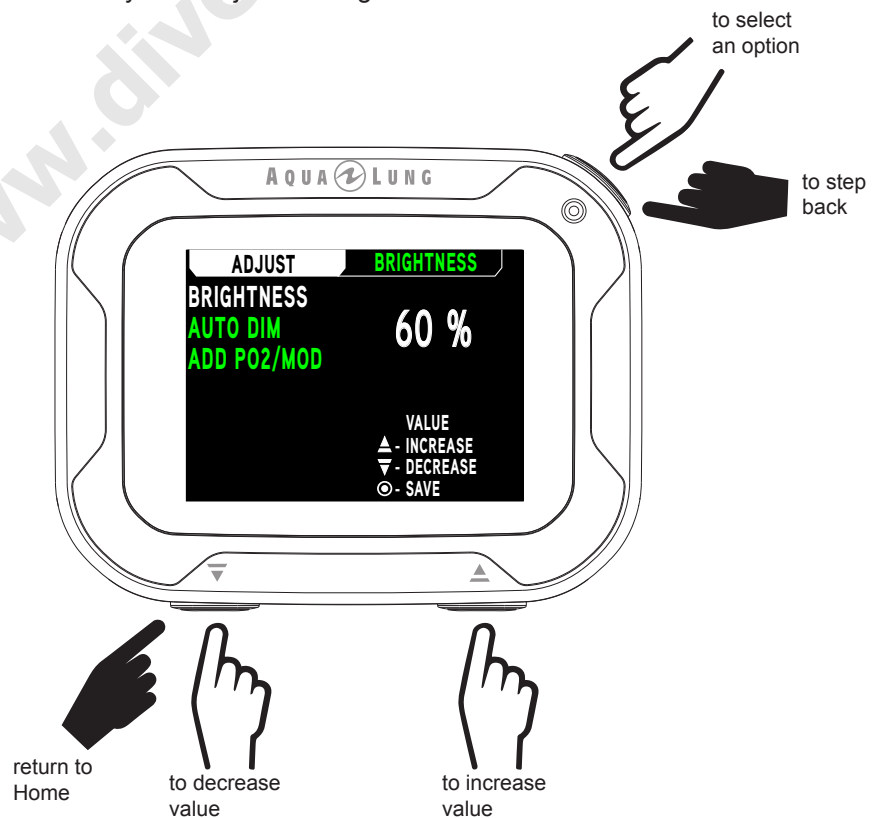


B. Auto Dim

While underwater the i770R screen dims after a set time interval from the last button press. This is done to reduce distractions during the dive and to conserve power. The i770R allows you to customize the time interval and degree of dimming. This feature may also be turned off.

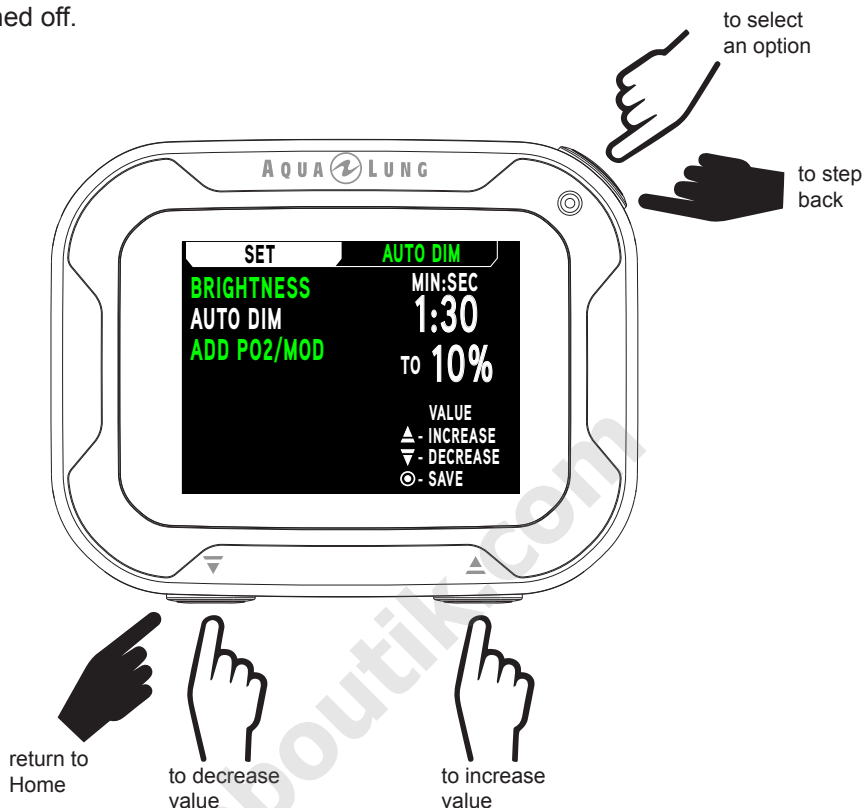


C. Add PO2/MOD

This feature allows you to choose whether to display the MOD (Maximum Operating Depth) or current PO2 value of the breathing gas on the Dive Main screen. This feature may also be set to off.

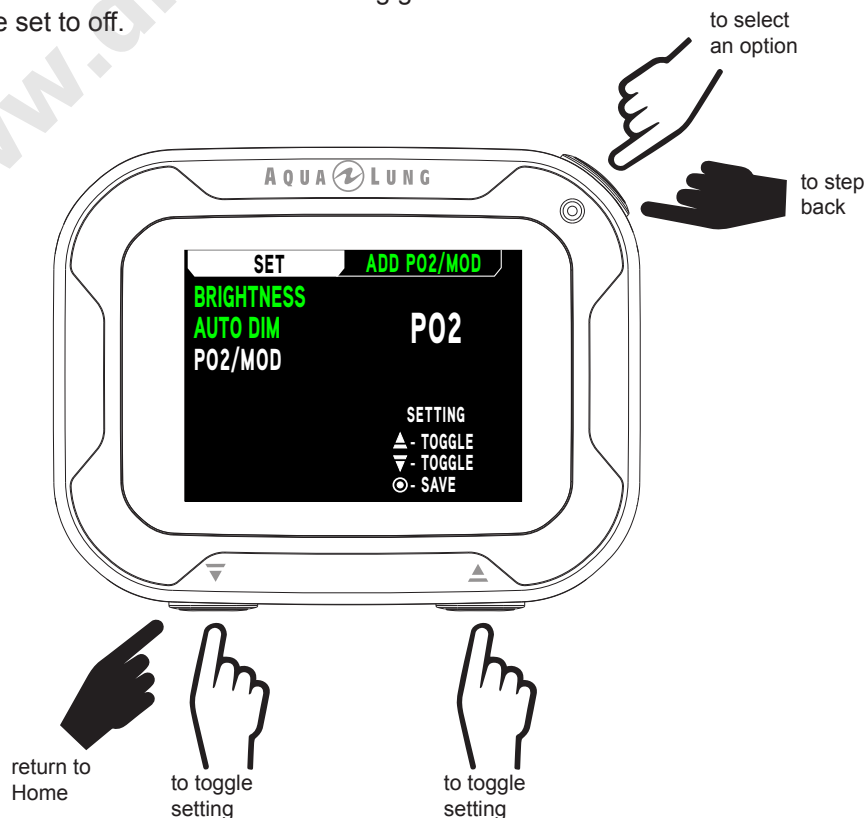


2. DATE-TIME

Within this menu you can set the time formats, date, and time of day.

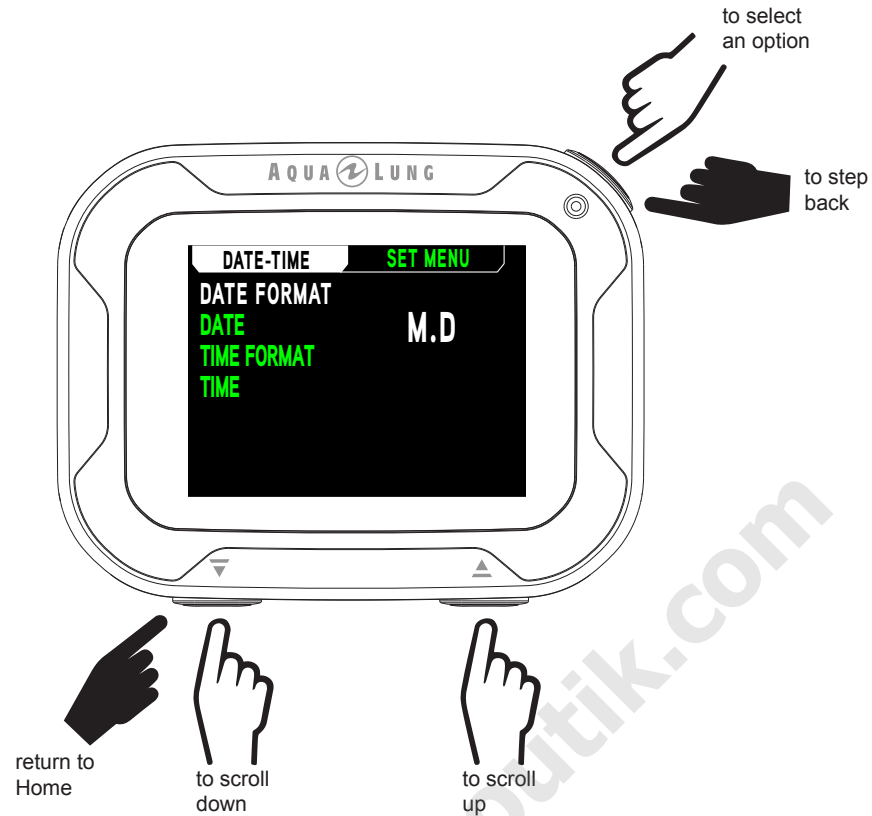


A. Date Format

You can choose between D.M (Day.Month) and M.D (Month.Day).

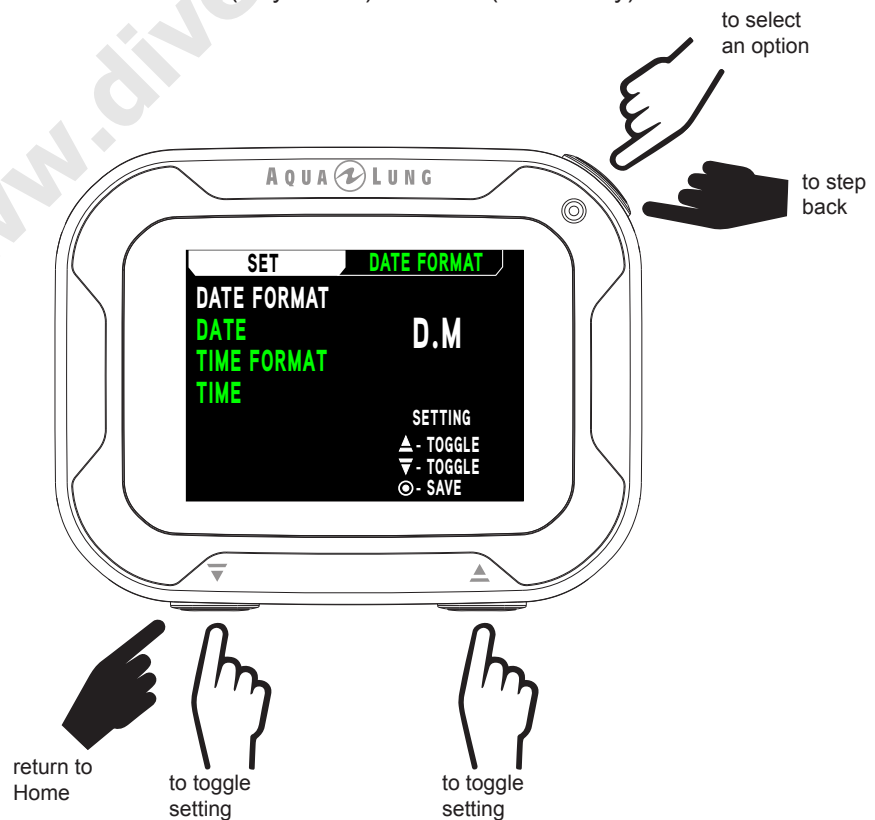


B. Date

Set the year, month, and day in order. The corresponding digit will flash, allowing it to be set.

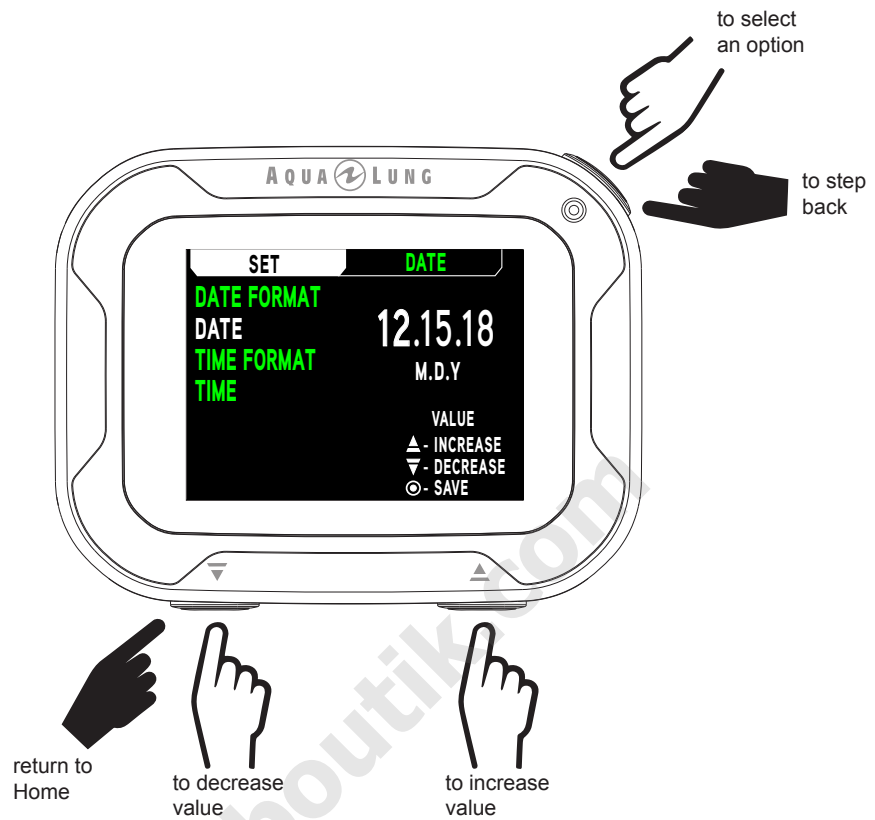
**C. Time Format**

Choose your preferred hour format (12 or 24 hr).

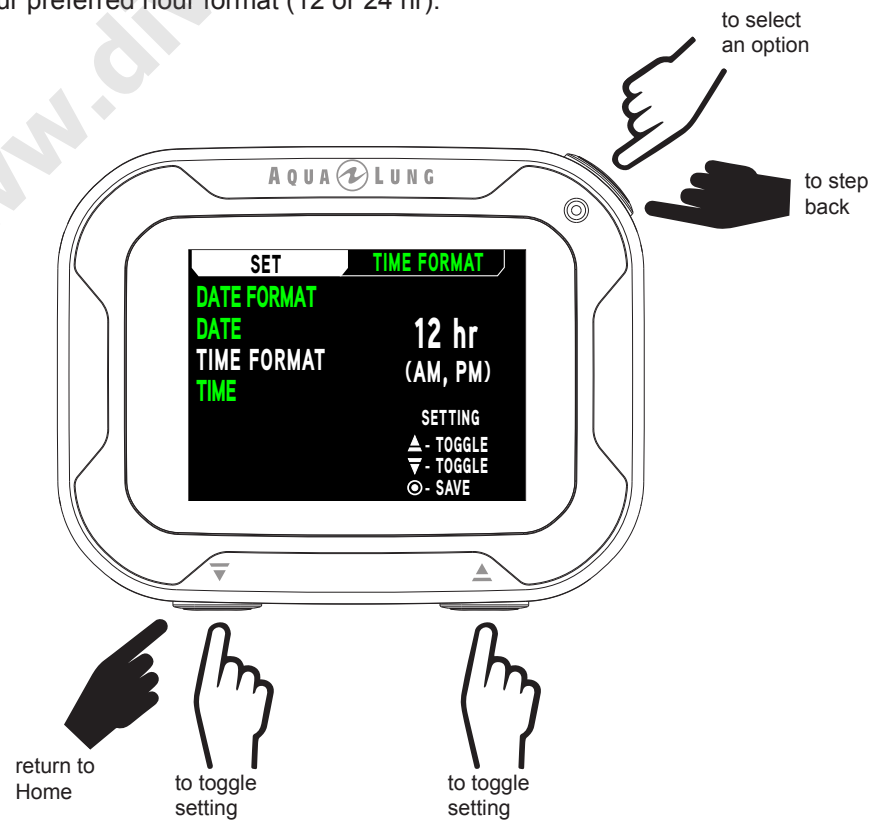


D. Time

Set the time of day.

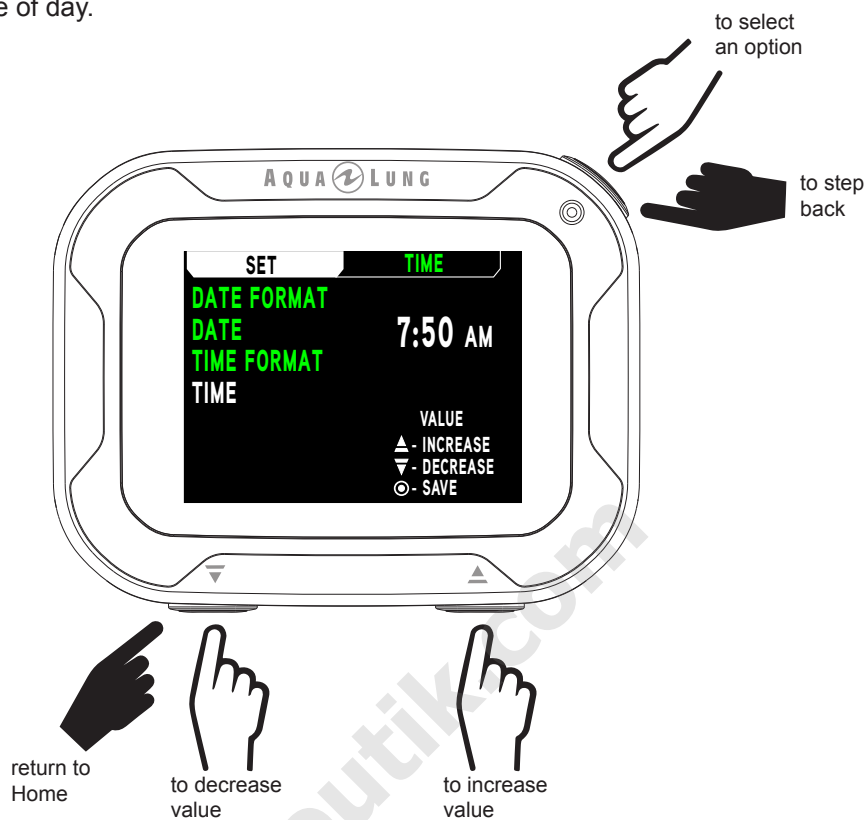**3. LANGUAGE**


Within this menu you can choose a different language mode.

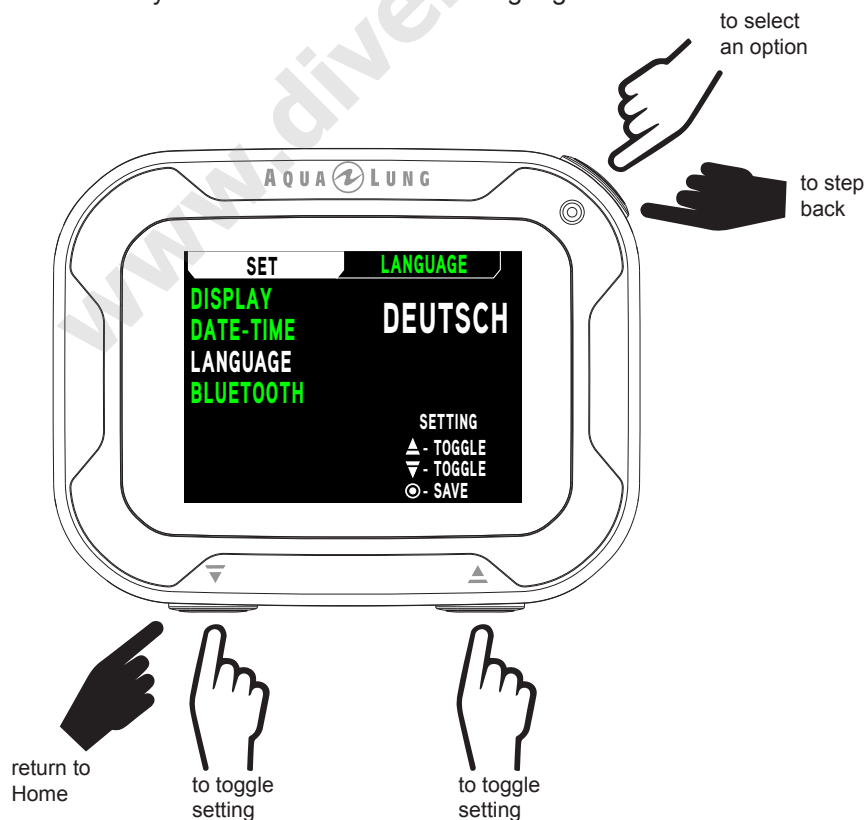

4. BLUETOOTH


Within this screen the Bluetooth® may be turned ON or OFF. When Bluetooth® is turned on it will operate in sniffing mode (searching for compatible devices) while on the surface. Communication with your i770R must be initiated with your mobile device using the DiverLog+ Application.

NOTE: When Bluetooth® is ON the Bluetooth® icon will be displayed when on the surface with the screen activated. Bluetooth® is temporarily deactivated when the i770R enters Sleep Mode (screen is turned off) or a dive is started. The i770R returns to "sniffing" mode when the i770R returns to Surface Mode after a dive or a button is pushed to wake the computer from Sleep Mode on the surface. You will notice the Bluetooth® icon flashing as the Bluetooth® function is reinitiating.

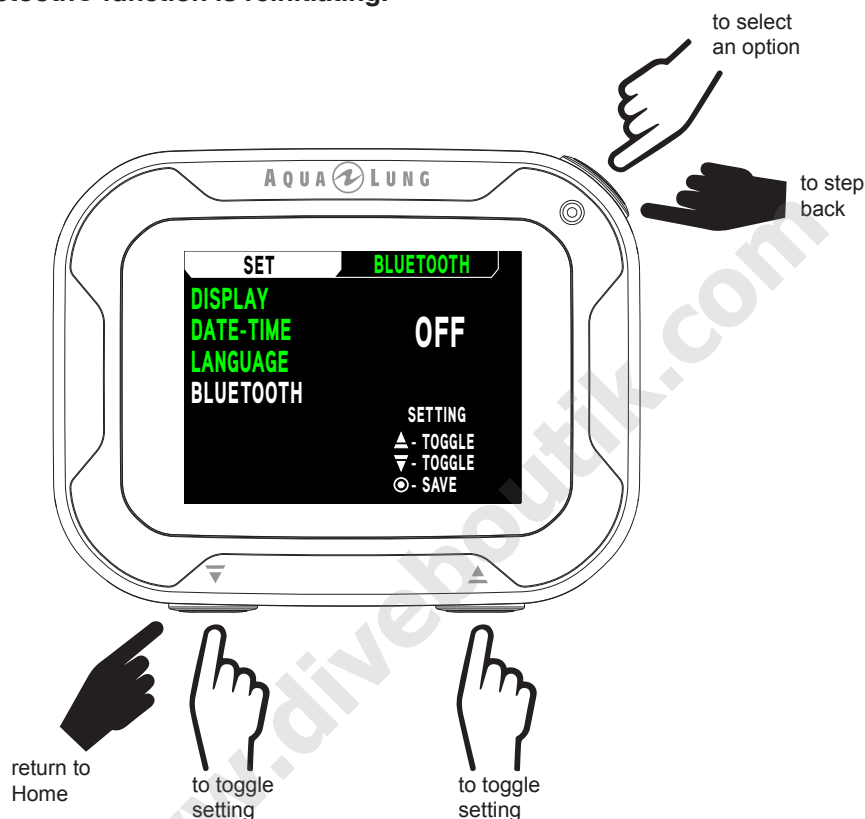

MODE


This screen allows you to access the DIVE, GAUGE, or FREE Modes.

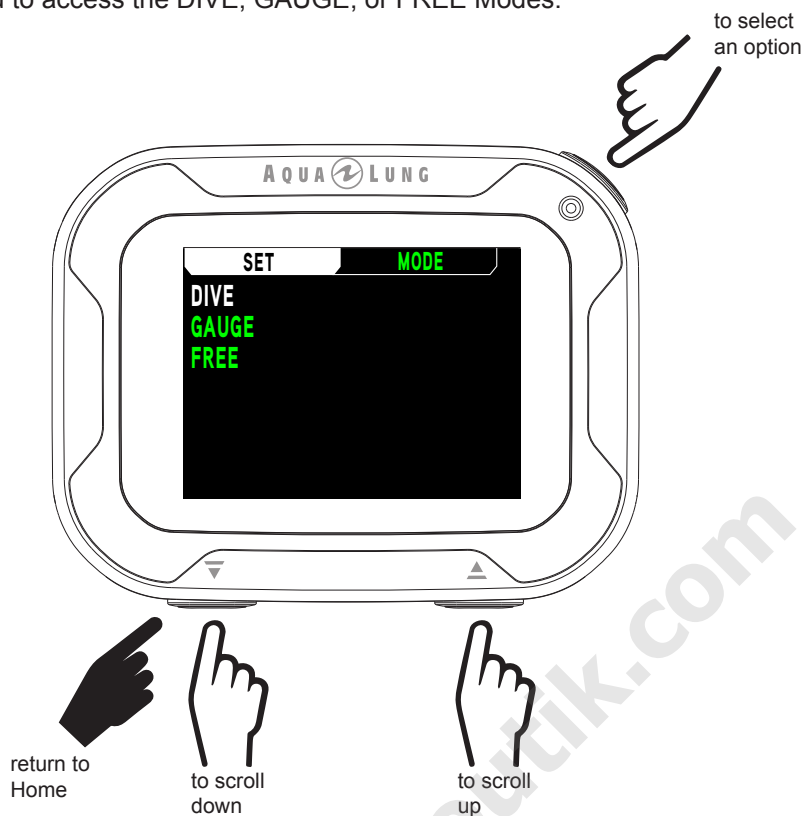

HISTORY

History is a summary of basic data recorded during all DIVE and GAUGE dives.

NOTE: Dives made in Free Mode are not shown in History or the Log Mode. Free dive data is only visible using the Diverlog + application.

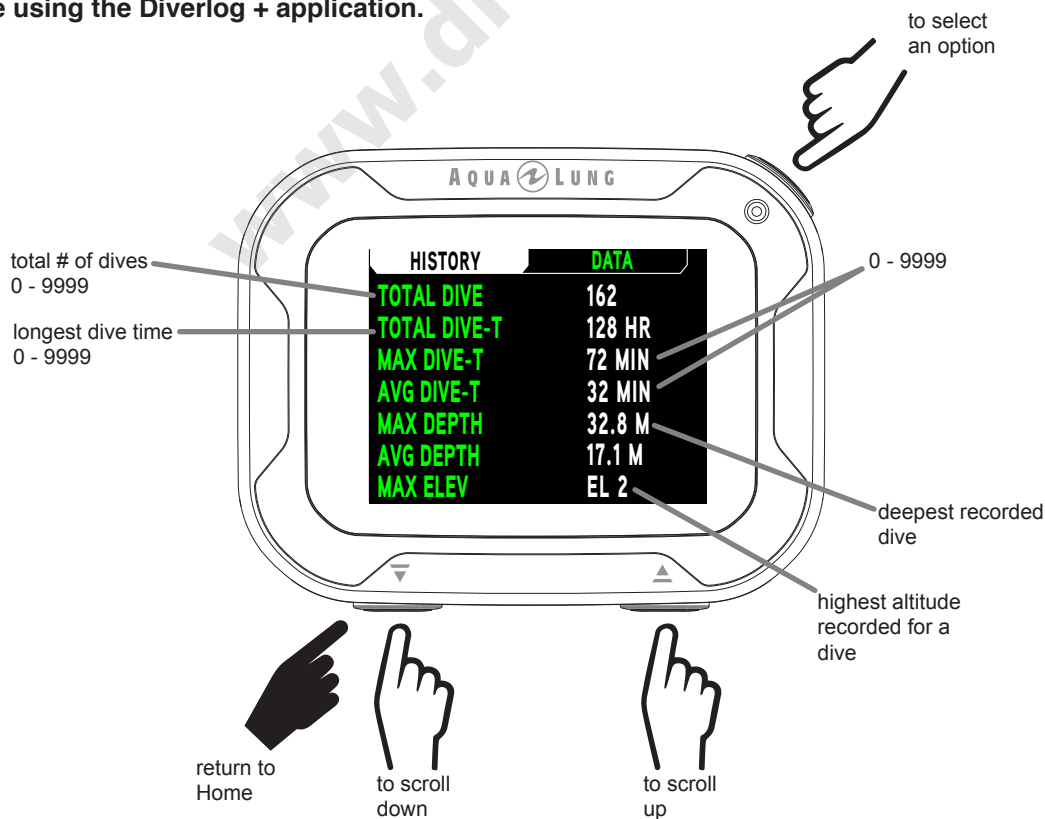




LOG


The log stores Information from DIVE and/or GAUGE Mode dives for viewing.

- If no dives are recorded, the message NO DIVES RECORDED YET will be displayed.
- There is a maximum of 99 entries overall. After exceeding 99 entries, the oldest entries will be deleted to allow space for the new entries.
- Dives per operation cycle will be designated DIVE 1 through 24.
- Dives are numbered starting with 1 each time DIVE (or GAUGE) Mode is activated. After 24 hours elapse with no dive, the first dive of the next period of operation is called Dive #1.
- In the event that dive time (DIVE-T) exceeds 999 min, the data at the 999 interval is recorded in the Log upon surfacing of the unit.

NOTE: New data will automatically overwrite the oldest data in memory when the memory becomes full. If you do not remember to log or download your dives, they will be lost when the memory overwrites. See the Upload/Download section p. 92 of this manual for instructions on downloading dives.

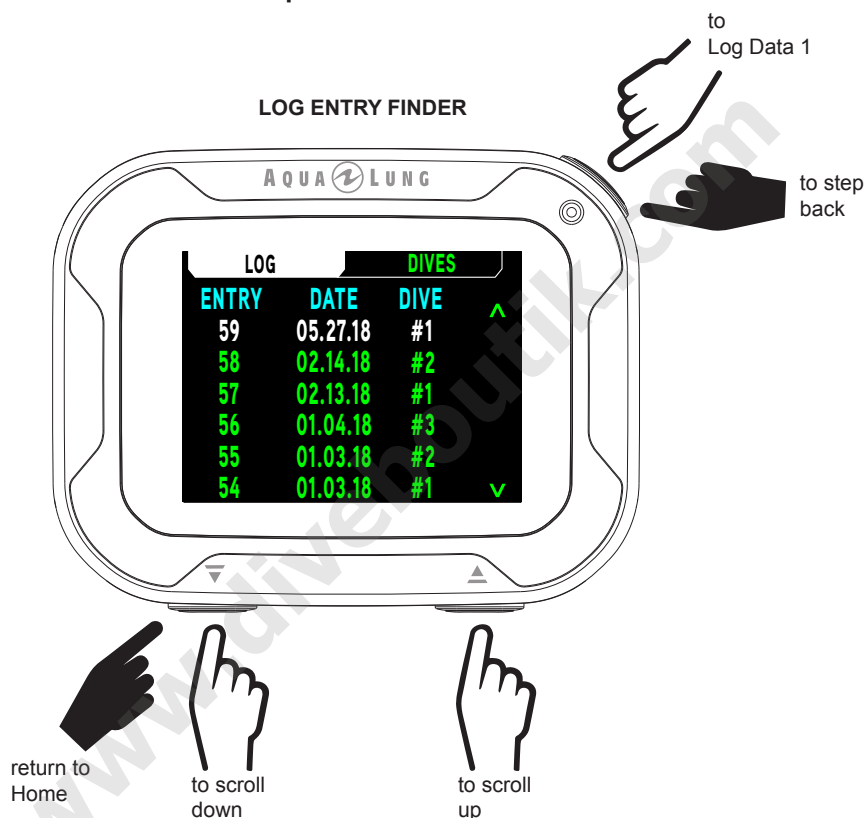

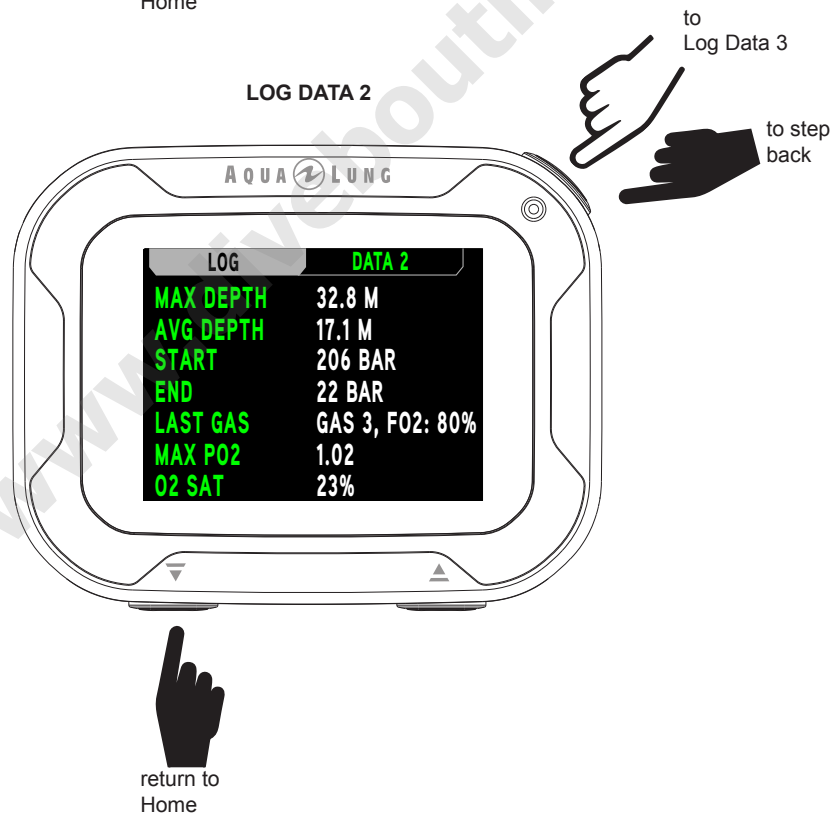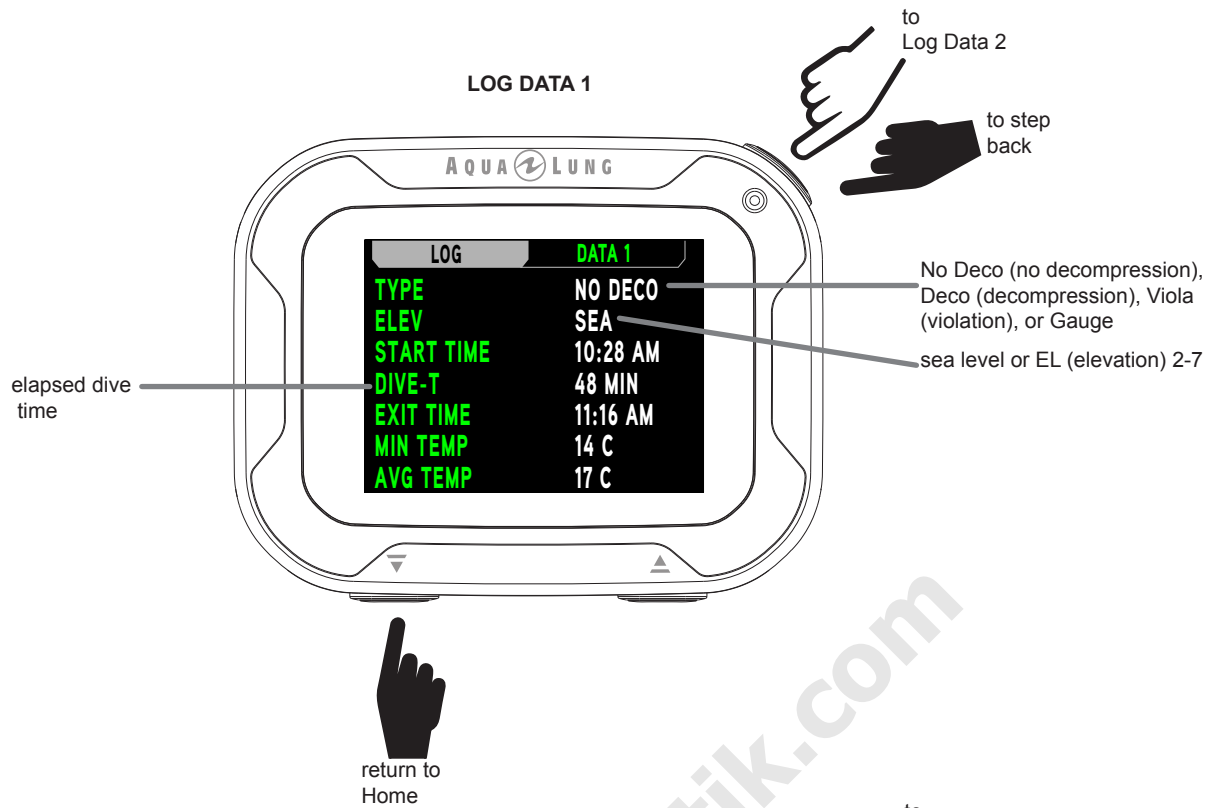

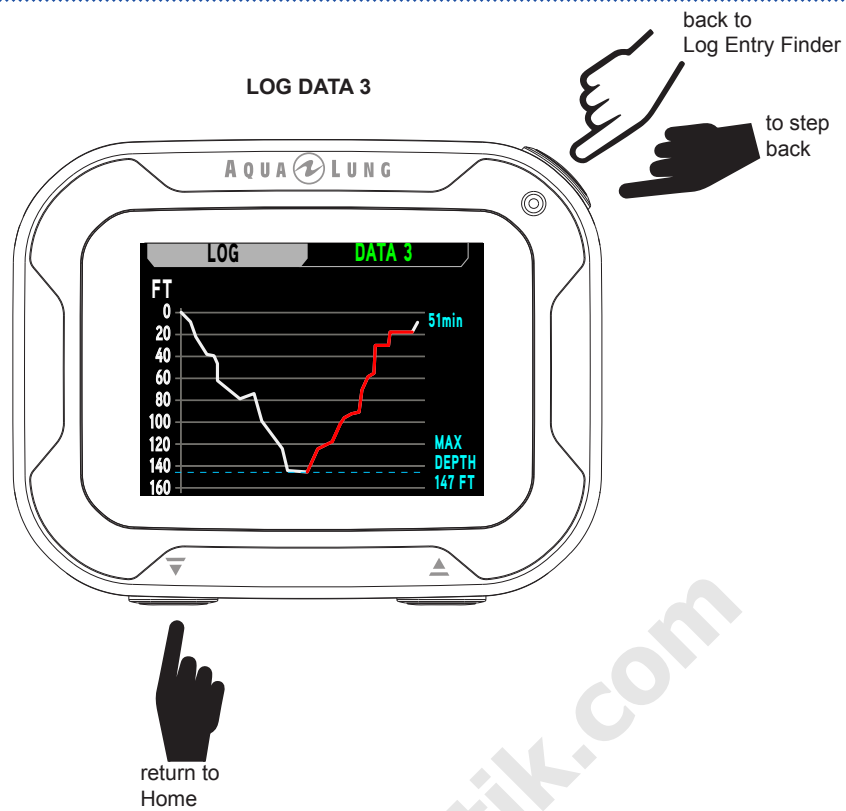

NOTE: Red colored sections on the graph represent decompression during the dive.

DIVE FEATURES

www.diveboutique.com

DTR (DIVE TIME REMAINING)


The i770R constantly monitors No Decompression status and O₂ Accumulation, and will display whichever time is the least amount available as DTR on the No Decompression Dive Main screen. The time being displayed will be identified by the NO DECO (no decompression) or O₂ MIN icons.

NO DECOMPRESSION

No Decompression is the maximum amount of time that you can stay at your present depth before entering decompression. It is calculated based on the amount of nitrogen absorbed by hypothetical tissue compartments. The rates each of these compartments absorb and release nitrogen is mathematically modeled and compared against a maximum allowable nitrogen level.

Whichever compartment is closest to this maximum level is the controlling compartment for that depth. Its resulting value NO DECO (no decompression) will be displayed. It will also be displayed graphically as the N₂ Bar Graph, see Bar Graphs later in this section.


As you ascend, the N₂ Bar Graph will recede as control shifts to slower compartments. This is a feature of the decompression model that is the basis for multilevel diving, one of the most important advantages that Aqua Lung dive computers offer.

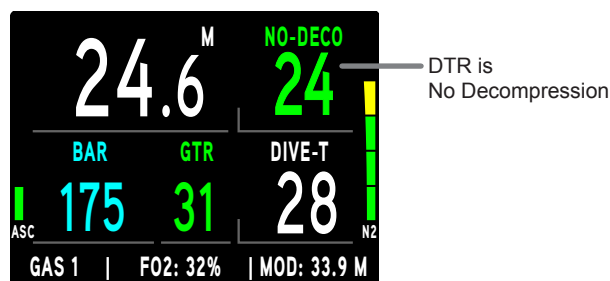

O₂ TIME (OXYGEN TIME REMAINING)

When set for nitrox operation, O₂ SAT (Oxygen Saturation) during a dive is displayed on the More Dive Data screen as a percentage of allowed saturation identified by the O₂ SAT graphic. The limit for O₂ SAT (100%) is set at 300 OTU (Oxygen Tolerance Units) per dive or 24 hour period. See the chart at the back of this manual for specific times and allowances. O₂ SAT and O₂ TIME values are inversely related; as the O₂ SAT value increases the O₂ TIME value decreases.


When the O₂ TIME value becomes less than the No Decompression calculations for the dive, DTR (Dive Time Remaining) will be controlled by O₂ SAT and the O₂ TIME value will be displayed as the DTR on the Dive Main screen, identified by the O₂ TIME icon.

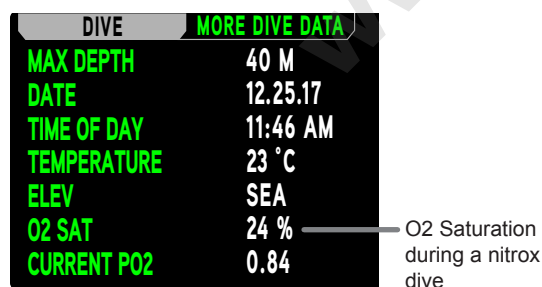

BAR GRAPHS

The i770R features two specific bar graphs.


1. The one on the left represents ascent rate. It is referred to as ASC Bar Graph.
2. The one on the right represents nitrogen loading. It is referred to as the N2 Bar Graph.

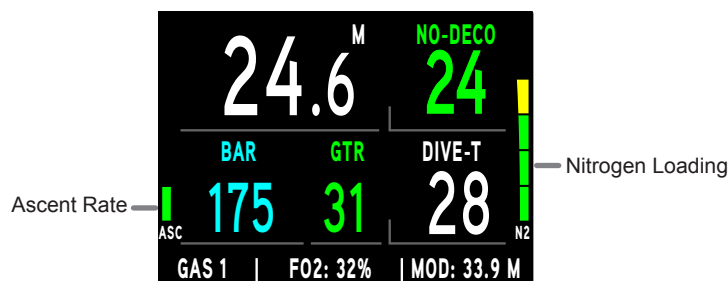

ASC BAR GRAPH

The ASC Bar Graph provides a visual representation of ascent speed (i.e., an ascent speedometer). When the ascent is faster than the recommended 30 fpm (9 mpm), all segments flash until the ascent is slowed.

# OF SEGMENTS	ASCENT RATE, MPM (FPM)
0	0 – 1.8 (0 - 6)
1	>1.8 - 3.7 (6 - 12)
2	>3.7 - 5.5 (>12 - 18)
3	>5.5 - 7.4 (>18 - 24)
4	>7.4 - 9.2 (>24 - 30)
5	> 9.2 (> 30)

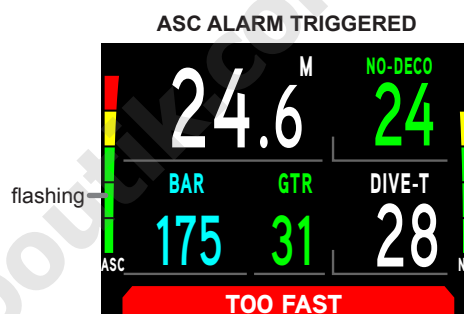

N2 BAR GRAPH

The N2 Bar Graph represents your relative No Decompression or Decompression status. As your depth and elapsed dive time increase, the bar graph will grow in length, shift from green to amber, and ultimately to red (indicating a Decompression condition). As you ascend the bar graph recedes, indicating that additional No Decompression time is available. The i770R monitors multiple theoretical nitrogen compartments simultaneously. The N2 Bar Graph displays the one that is in control of your dive at any given time.

ALGORITHM

The i770R utilizes the Z+ algorithm to calculate nitrogen tissue loading. Performance is based on Bühlmann ZHL-16C algorithm model. To create even greater margins of safety with respect to decompression, a Conservative Factor as well as No Decompression Deep and Safety Stops can be included for No Decompression dives.

CONSERVATIVE FACTOR

When the Conservative Factor is set ON, the dive time remaining, No Decompression/O2 TIME, which are based on the algorithm and used for N2/O2 calculations and displays relating to Plan Mode, will be reduced to the values available at the altitude level that is 915 m (3,000 ft) higher than the actual altitude at activation. Refer to the charts in the back of this manual for dive times.

DEEP STOP

When the Deep Stop selection is set ON, it will trigger after descending deeper than 24 m (80 ft). The i770R then calculates (continually updating) a Stop Depth equal to ½ the Max Depth.

NOTE: The Deep Stop feature only works in DIVE Mode while within No Decompression times.

- While 3 m (10 ft) deeper than the calculated Deep Stop, you will be able to access a DS (Deep Stop) Preview screen that will display the current calculated Deep Stop Depth/Time.

- Upon initial ascent to within 3 m (10 ft) below the calculated Stop Depth, a Deep Stop screen displaying a Stop Depth at ½ the Max Depth will appear with a countdown timer beginning at 2:00 (min:sec) and counting down to 0:00. If you descend 3 m (10 ft) below, or ascend 3 m (10 ft) above, the calculated Stop Depth for 10 seconds during the countdown, the No Decompression Main will replace the Deep Stop Main display and the Deep Stop feature will be disabled for the remainder of that dive. There is no penalty if the Deep Stop is ignored.
- In the event that you enter Decompression, exceed 190 ft (57 m), or a High O₂ SAT (Oxygen Saturation) condition, ≥ 80%, occurs, the Deep Stop will be disabled for the remainder of that dive.
- The Deep Stop is disabled during a High PO₂ Alarm condition, ≥ set point.

SAFETY STOP

Upon ascent to within 1.5 m (5 ft) deeper than the Safety Stop depth set for 1 second on a No Decompression dive in which depth exceeded 9 m (30 ft) for 1 second, a beep will sound and a Safety Stop at the depth set will appear on the Dive Main display with a countdown beginning at the Safety Stop time set and counting down to 0:00.


- If the Safety Stop was set for OFF, the display will not appear.
- In the event that you descend 3 m (10 ft) deeper than the Stop Depth for 10 seconds during the countdown, or the countdown reaches 0:00, the No Decompression Main screen will replace the Safety Stop Main screen. the Safety Stop Main screen will reappear upon ascent to within 1.5 m (5 ft) deeper than the Safety Stop depth set for 1 second.
- In the event that you enter Decompression during the dive, complete the Decompression obligation, then descend below 9 m (30 ft); the Safety Stop Main will appear again upon ascent to within 1.5 m (5 ft) deeper than the Safety Stop depth set for 1 second.
- If you ascend to 0.9 m (3 ft) of the surface for 1 second, the Safety Stop will be canceled for the remainder of that dive.
- There is no penalty if you surface prior to completing the Safety Stop or choose to ignore it.

LOW BATTERY WHILE ON THE SURFACE

Warning Level

- When capacity drops to 15% of full charge, the battery icon is to be displayed in yellow and flash.
- The graphics WARNING LOW BATT with a yellow background at the bottom of the screen will flash while in Surface Mode.
- The i770R functions continue but screen brightness is limited to 60% of max.

⚠ WARNING: Recharge the battery before diving if your i770R indicates the Battery Low Warning or Alarm.

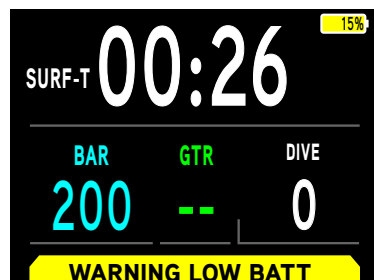

Alarm Level


- When capacity drops to 1% of full charge the battery icon is to change to red and flash.
- The graphics ALARM LOW BATT with a red background at the bottom of the screen while in Surface Mode.
- The i770R functions continue until the battery is exhausted but screen brightness is limited to 30% max and dives are not permitted.

⚠ WARNING: Recharge the battery before diving if your i770R indicates the Battery Low Warning or Alarm.

**LOW BATTERY DURING A DIVE****Warning Level**


- When capacity drops to 15% of full charge, the battery icon is to be displayed in yellow and flash.
- The graphic WARNING on a yellow background at the bottom of the screen and the graphic LOW BATT in yellow (replacing NO-DECO/O2 TIME and DIVE-T) shall flash for 10 seconds while the audible alarm sounds.
- After the audible alarm the battery icon will remain solid while the graphics are removed.
- The i770R functions continue but screen brightness is limited to 60% max.

⚠ WARNING: Recharge the battery before making additional dives if your i770R indicates the Battery Low Warning during a dive.

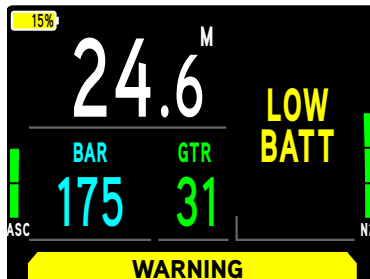**Alarm Level**

- When capacity drops to 1% of full charge the battery icon is to change to red and flash.
- The graphic ALARM on a red background at the bottom of the screen and the graphic LOW BATT with two up arrows in red (replacing NO-DECO/O2 TIME and DIVE-T) shall flash during the audible alarm.
- The i770R functions continue but screen brightness is limited to 30% max.
- The i770R will shut down when the battery is completely exhausted.

⚠ WARNING: The i770R will shut down when the battery is completely exhausted. Recharge the battery before making additional dives. End your dive as soon as is safe if your i770R indicates the Battery Low Alarm during a dive.

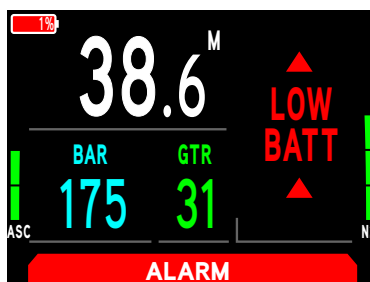


LOW TMT (TRANSMITTER) BATTERY

Warning Level

- Activates when the transmitter voltage drops below 2.7 volts.
- The graphic TMT LOW BATT is displayed on a yellow background at the bottom of the screen.
- Transmitter operation continues.


⚠ WARNING: Change the transmitter battery before starting a new dive or making subsequent dives if your i770R indicates the Transmitter Battery Low Warning.

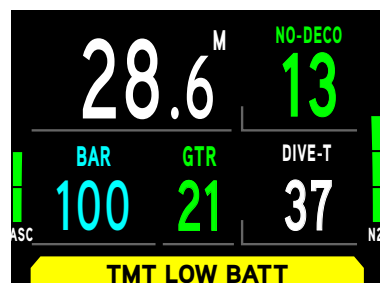

Alarm Level

- Activates when the transmitter voltage drops below 2.5 volts.
- The graphic TMT LOW BATT is displayed on a red background at the bottom of the screen.
- Transmitter operation continues until the battery drops to a nominal voltage. At that time a Lost Link Warning will display on the screen.

⚠ WARNING: Change the transmitter battery before starting a new dive or making subsequent dives if your i770R indicates the Transmitter Battery Low Alarm.

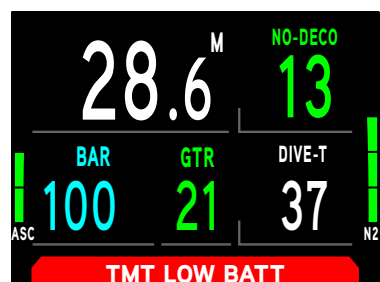

AUDIBLE ALARM

While operating in Dive or Gauge Mode, the audible alarm will emit 1 beep per second for 10 seconds when alarms strike. During that time, the audible alarm can be acknowledged and silenced by pressing the SELECT button.

The audible alarms will not be active if the audible alarm is set to OFF (a Set Alarms setting).

Free Dive Mode has its own alarms which emit multiple beeps multiple times which cannot be acknowledged or set to OFF.

Events that emit (10) beeps >> each sound for ½ sec with ½ sec silence between beeps:

- Watch Daily Alarm.
- Watch CDT Alarm.
- DIVE, GAUGE - GTR Alarm.
- DIVE, GAUGE - Turn Alarm (TMT 1 only).
- DIVE, GAUGE - Press Alarm (TMT in use).
- DIVE, GAUGE - Loss of Link (Dive Mode).
- DIVE, GAUGE - Ascent Rate too fast.
- DIVE, GAUGE - Depth Alarm.
- DIVE, GAUGE - Dive-T Alarm.
- DIVE - DTR Alarm.
- DIVE - N2 Bar Alarm.
- DIVE - entry into Decompression.
- DIVE - Conditional Violation.
- DIVE - Delayed Violations 1, 2.
- DIVE, GAUGE - Delayed Violation 3.
- DIVE, GAUGE - entry into Violation Gauge Mode.
- DIVE - PO2 Alarm.
- DIVE - O2 Warning and Alarm.
- DIVE - Gas Switch Alarm.

Events that emit (3) beeps >> each sound for ½ sec with ½ sec silence between beeps:

- FREE - Delayed Violation 3.

Events that emit (3) sets of (3) beeps >> each sound for ½ sec with ½ sec silence between beeps and ½ sec silence between sets:

- FREE - RTI AL (Repeating Time Interval Alarm)
- FREE - CDT (Countdown Timer) Alarm.
- FREE - N2 Alarm.
- FREE - Violation, entry into Decompression.

Events that emit (3) sets of (3) beeps >> each sound for ⅓ sec with ⅓ sec silence between beeps and ¼ sec silence between sets:

- FREE - DA1 to DA3 Alarms.

PROXIMITY OF THE TMTs (TRANSMITTERS) AND i770R

The TMTs emit low frequency signals that radiate out in semicircular patterns parallel to the length dimension of the TMT. A coiled antenna inside the i770R wrist unit receives the signals when it is positioned within a zone parallel to or at a 45 degree angle to the TMT as illustrated.



The i770R cannot effectively receive a signal when it is held out to the sides of the TMT or held at distances greater than 0.91 m (3 ft) in front of the TMT. Best reception is achieved when the i770R is within less than 0.91 m (3 ft) of the TMT.


When installed into the high pressure ports of the regulator first stages, the TMTs must be positioned so that they face horizontally outward from the tank valves.

Link Interruption Underwater

During a dive, you may at times move the i770R out of the signal pattern of the TMT, resulting in a temporary loss of the link signal. The link will be restored within 4 seconds after the i770R is moved back into its correct position.

An interruption may also occur while the i770R is within 3 feet (1 meter) of a running DPV, or shortly after a strobe flashes. The link will be restored within 4 seconds after the i770R is moved out of that area.


If the link is not restored within 1 minute, the audible alarm will sound, dashes will replace gas pressure and GTR values.

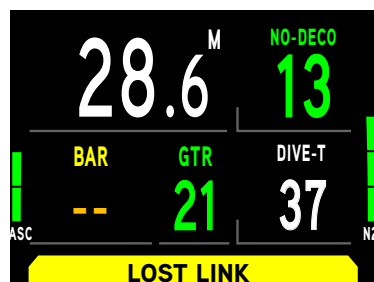

DIVE SURFACE MODE

ON THE SURFACE BEFORE A DIVE

The Dive Main screen will display the SURF-T (Surface Time) and the selected FO₂ of the breathing gas. The surface time displayed is the time since activation or the surface interval after a dive.

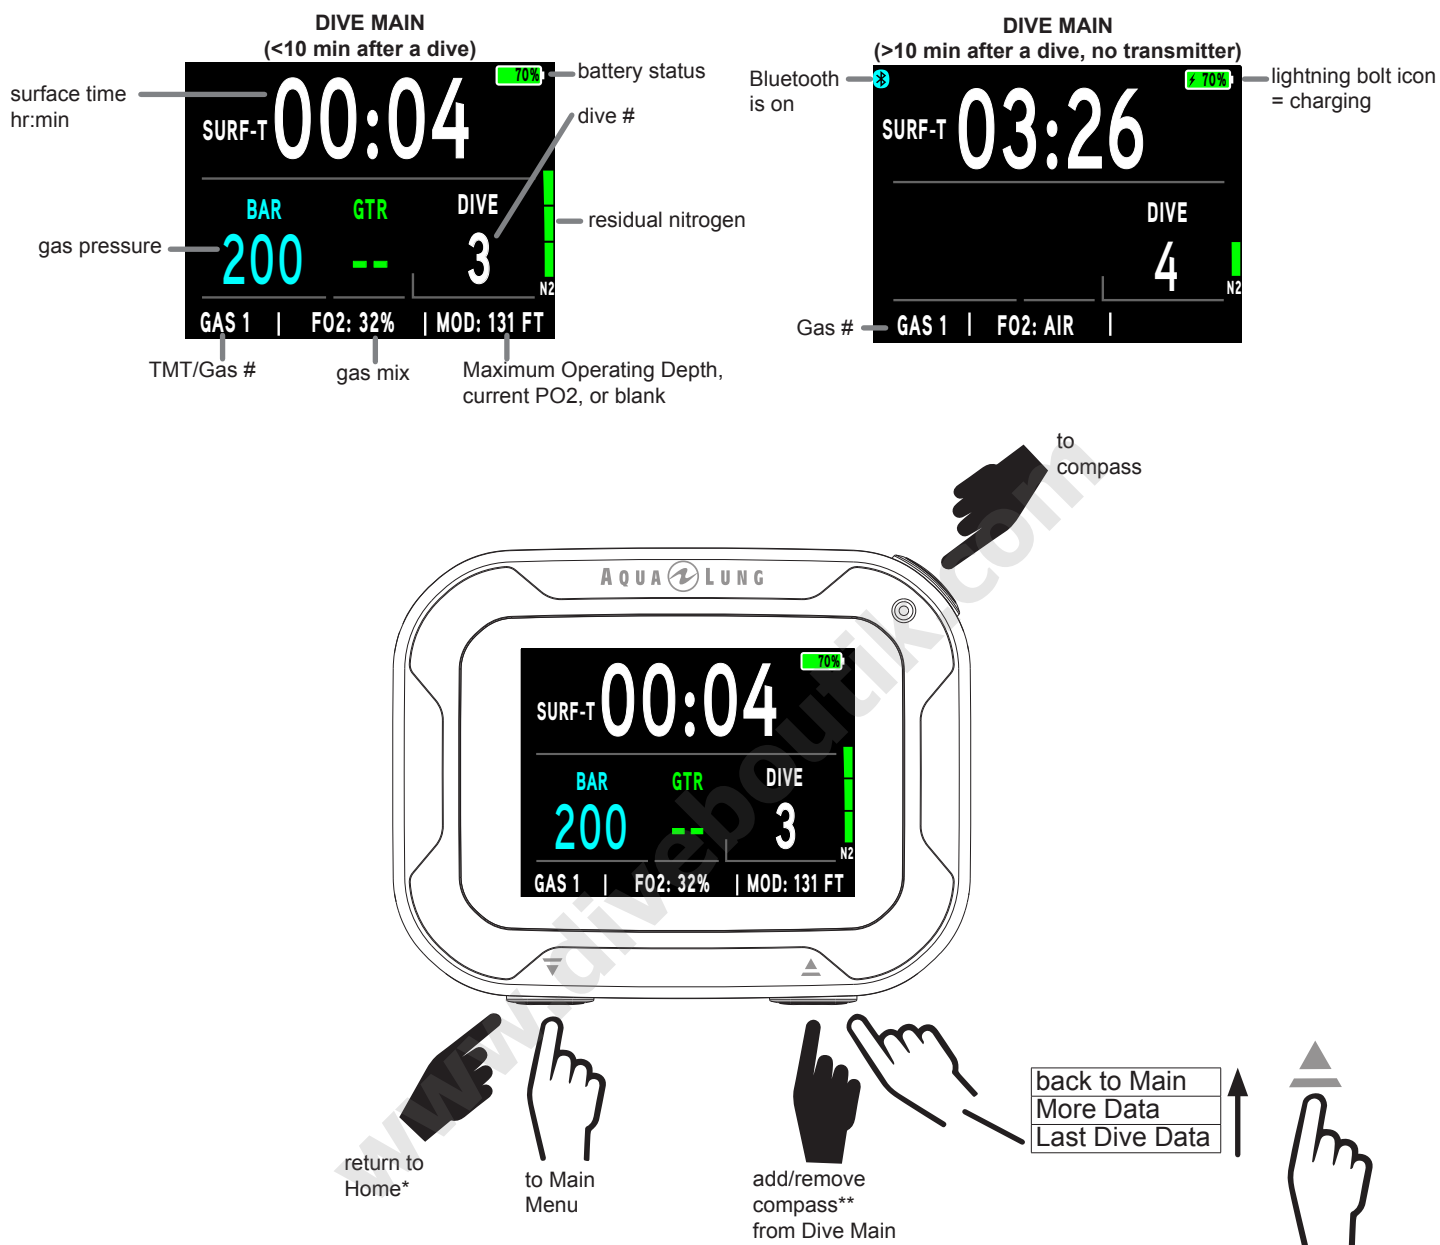

*This function is blocked during the first 10 minutes after a dive.

**See the "Compass On Main Screen" section p. 90 for further details.

LAST DIVE DATA

This screen displays essential data from the last dive. If there has been no dive within the current activation cycle, the message NO DIVE YET will be displayed.

DIVE	LAST DIVE DATA
MAX DEPTH	247 FT
DIVE-T	56 MIN

MORE DATA

This screen displays additional data like date, time of day, temperature, current elevation readings, the FLY (Time to Fly), O2 SAT (Saturation), and the DESAT (Desaturation) countdown.


- The Time to Fly countdown shall begin counting from 23:50 to 0:00 (hr:min), 10 minutes after surfacing from a dive.
- The DESAT counter shall provide calculated time for Tissue Desaturation at sea level taking into consideration the Conservative Factor if the Conservative setting was set to on. It shall begin counting down 10 minutes after surfacing from DIVE or FREE dives counting down from a maximum of 23:50 to 0:00 (hr:min). When the DESAT countdown reaches 0:00 (hr:min), which will generally occur prior to the FLY countdown reaching 0:00 (hr:min), it will remain on the display as 0:00 until the Fly countdown also reaches 0:00.
- Dashes will be shown for FLY, O2SAT, and DESAT if no dives have been made during the current operation cycle.

NOTE: Desaturation requiring times greater than 24 hours will display the graphic > 24:00. In the event that Time to Desaturate still remains at the end of 24 hours, the unit will turn Off and any Nitrogen and Oxygen calculations will clear.

DIVE	MORE DATA
DATE	7.30.17
TIME OF DAY	11:46 AM
TEMPERATURE	74 °F
ELEV	SEA
FLY	16:36
O2 SAT	24%
DESAT	9:48

DIVE MAIN MENU

To set transmitters, alarms, gases, plan dives, or change other settings you must navigate through the Dive Main Menu. Enter the menu by pressing the ▼ (Down) button. Press the Ⓢ (Select) button to choose options from the Dive Main Menu. All Dive Main Menu options will be discussed in the order they appear in the menu below.

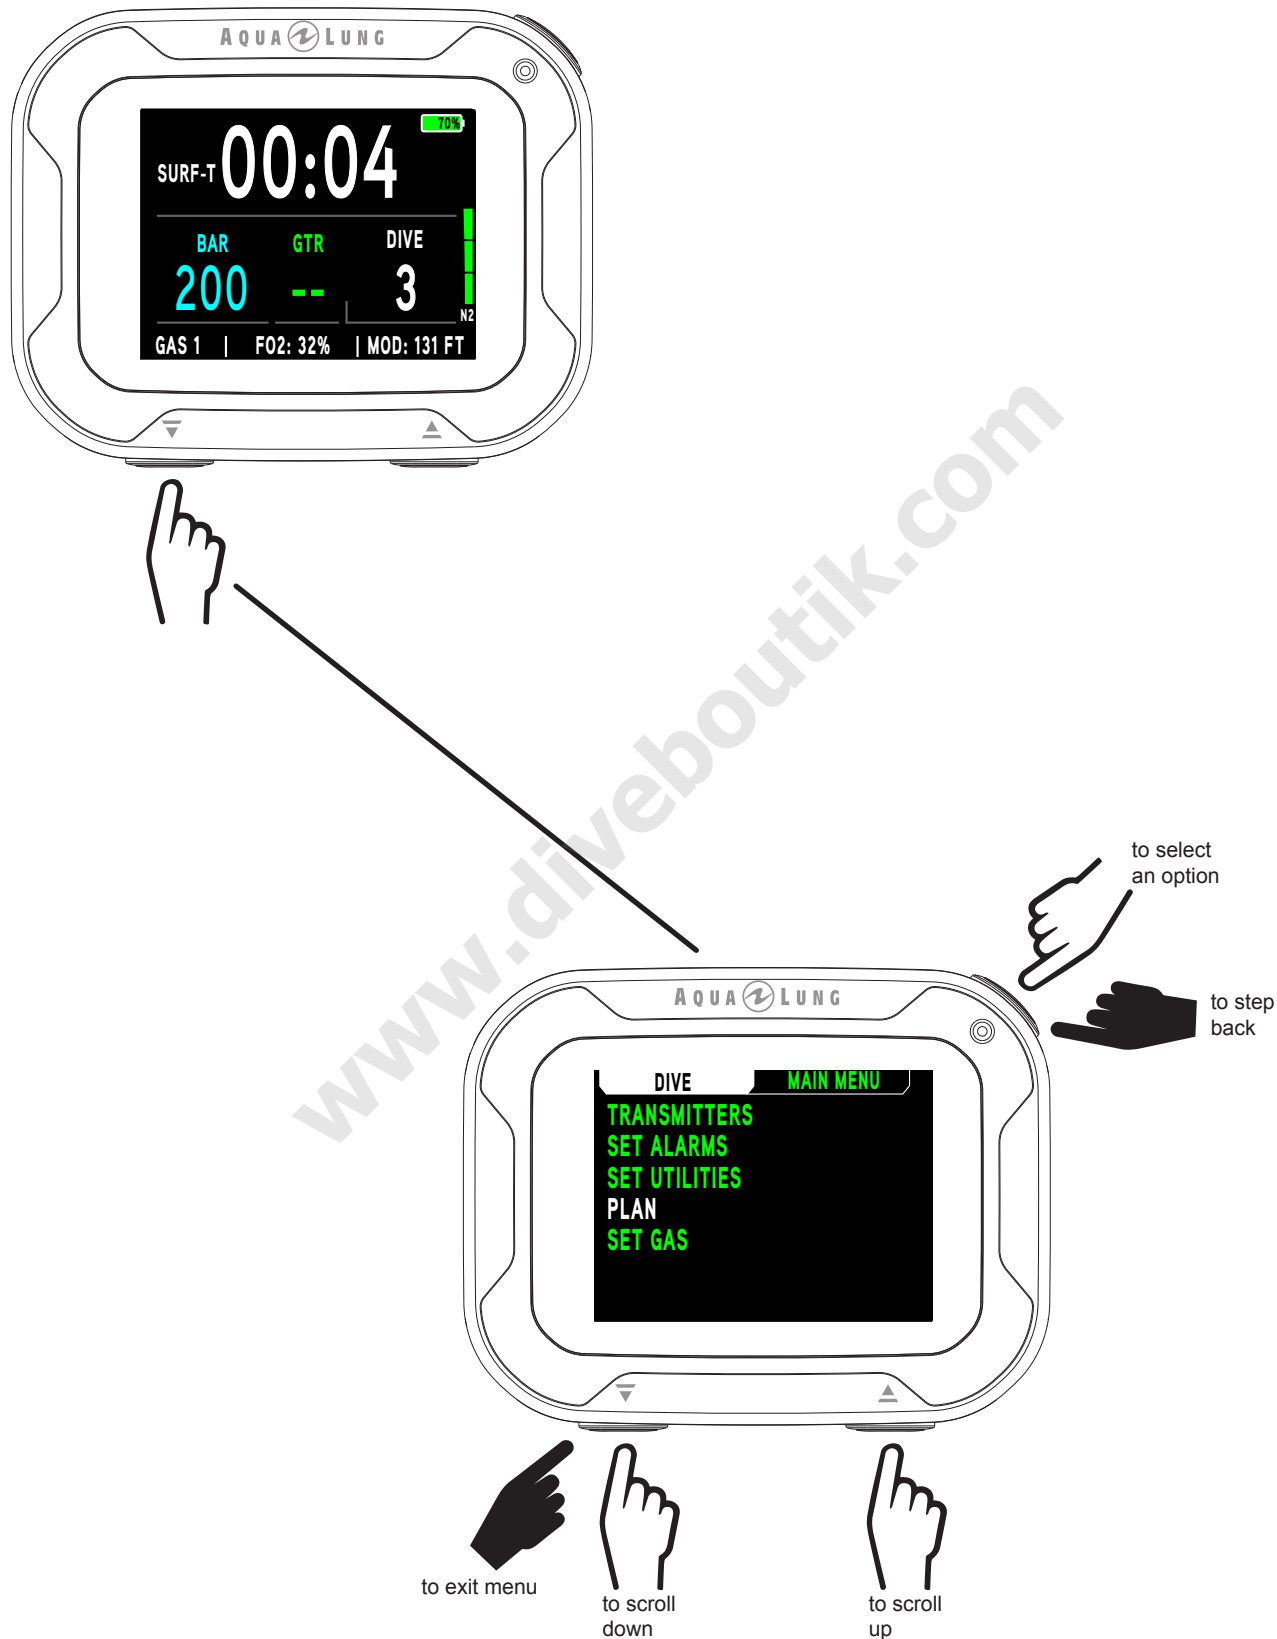

TRANSMITTERS


The i770R can use up to 4 transmitters to monitor gas supplies. The TMT Menu allows for the programming of the wrist unit to receive the signals from selected Aqua Lung transmitters. See the Dive Mode Features section (p. 34) for further information on transmitters.


You can scroll up or down to select the TMT (transmitter) you want to modify. The transmitters have the option of ON, OFF, or SET. The SET option will allow you to enter the serial number/ID code for the transmitter.

When a transmitter is set ON the message SEARCHING will flash while your i770R establishes a connection to the selected transmitter. The transmitter status will display battery and gas pressure status. If your i770R can't connect to the selected transmitter for any reason, the message NOT AVAIL (not available) will be displayed.

NOTE: If the TMT is set OFF for the active gas, the section of the Main Screen that normally displays pressure will be blank.

NOTE: If the proceeding transmitter in the menu is set to OFF the settings for the following transmitters will be blocked. For example, access to TMT 2 settings will be blocked if TMT 1 is set to OFF.

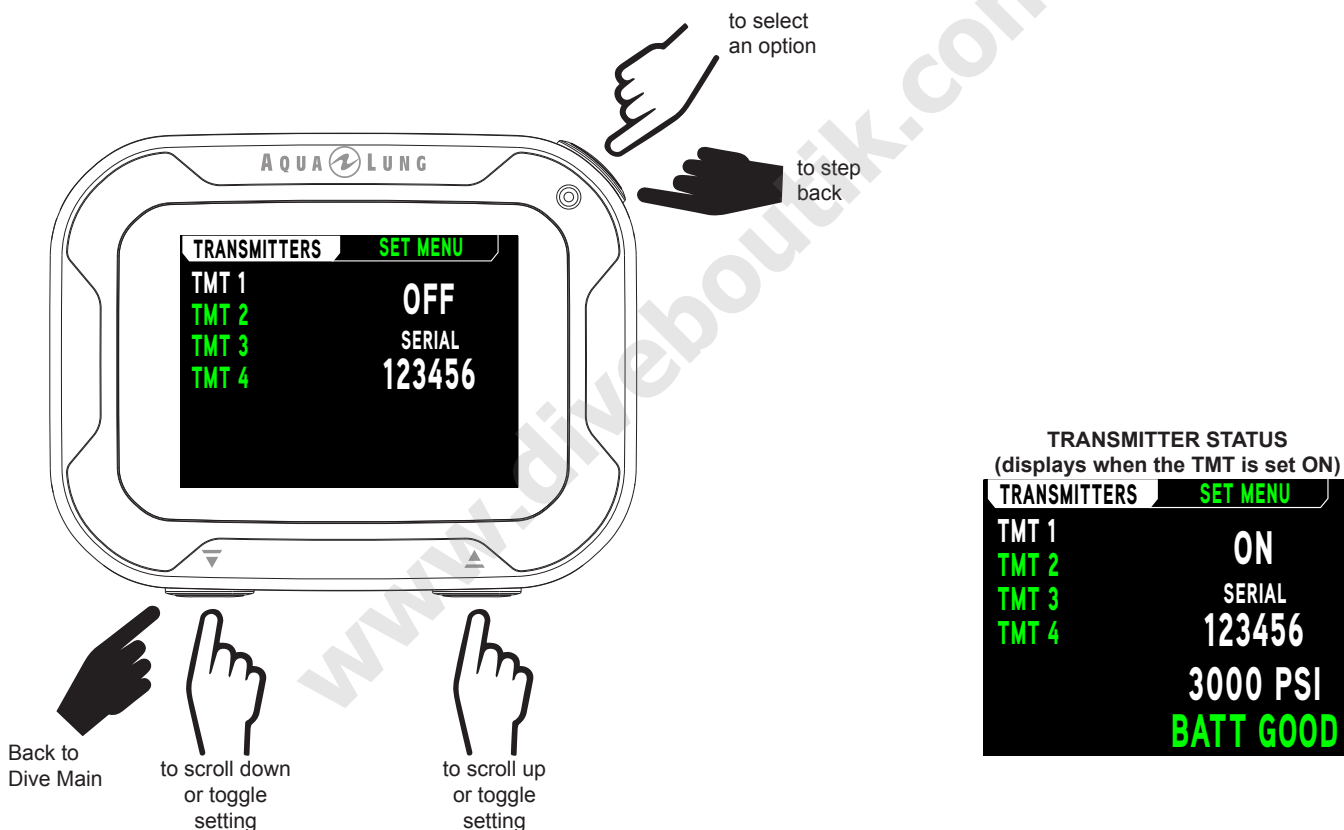

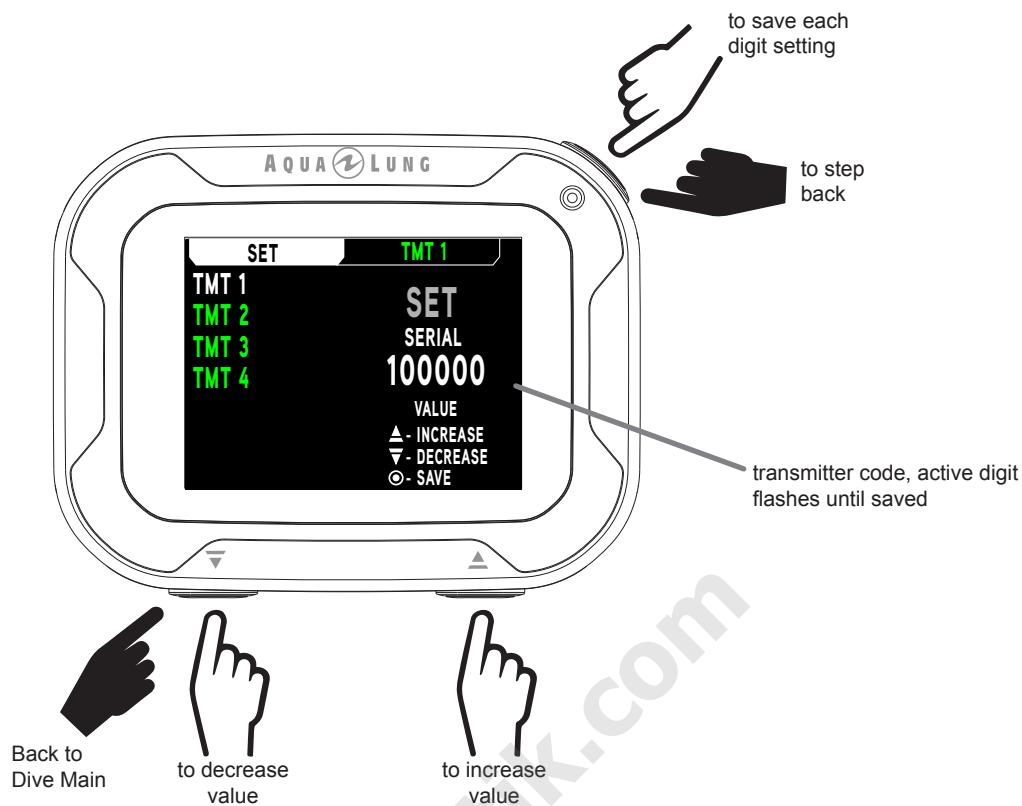


NOTE: The serial number can be located in two places directly on the transmitter.




SET ALARMS

Within this submenu you can customize the following seven alarm settings. When one of these alarms is triggered the critical data will flash on the Dive Main screen.

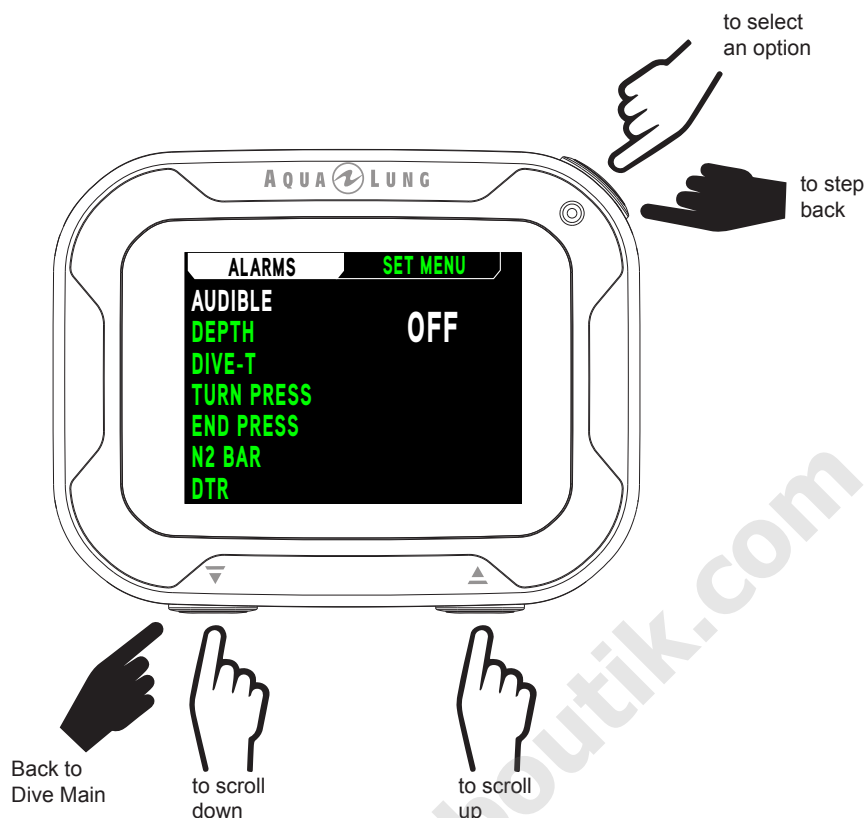


1. Audible

The Audible Alarm allows you to set audible alarms ON or OFF.

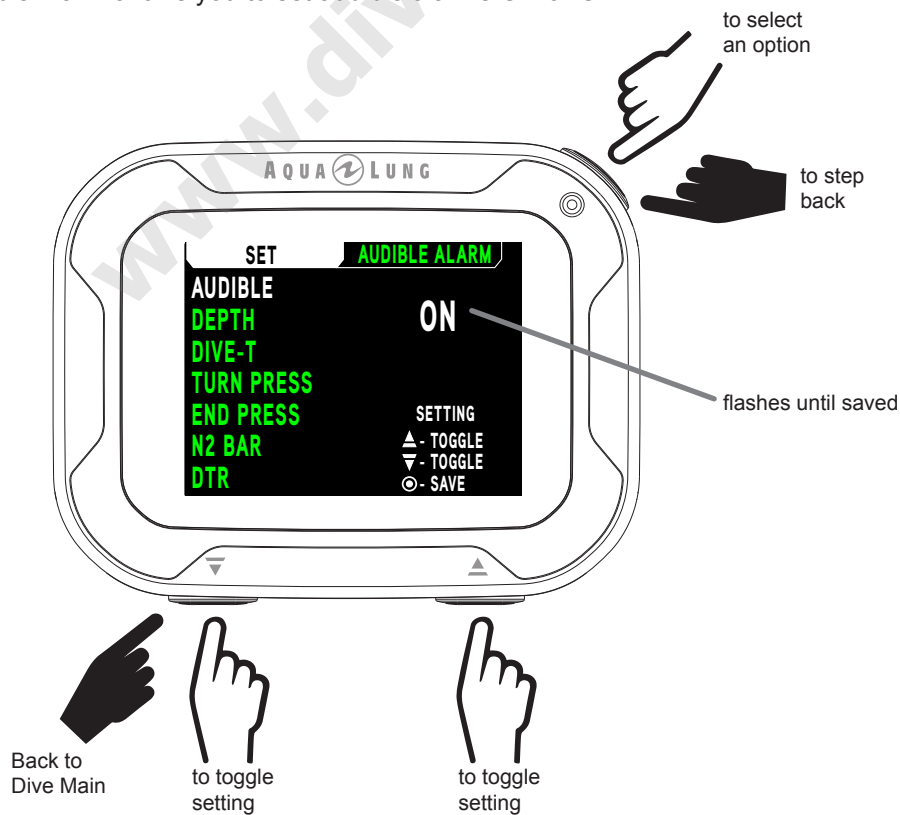


2. Depth

The Depth Alarm allows you to set a maximum depth alarm. Selections include OFF or 10 - 100 m (30 - 330 ft).

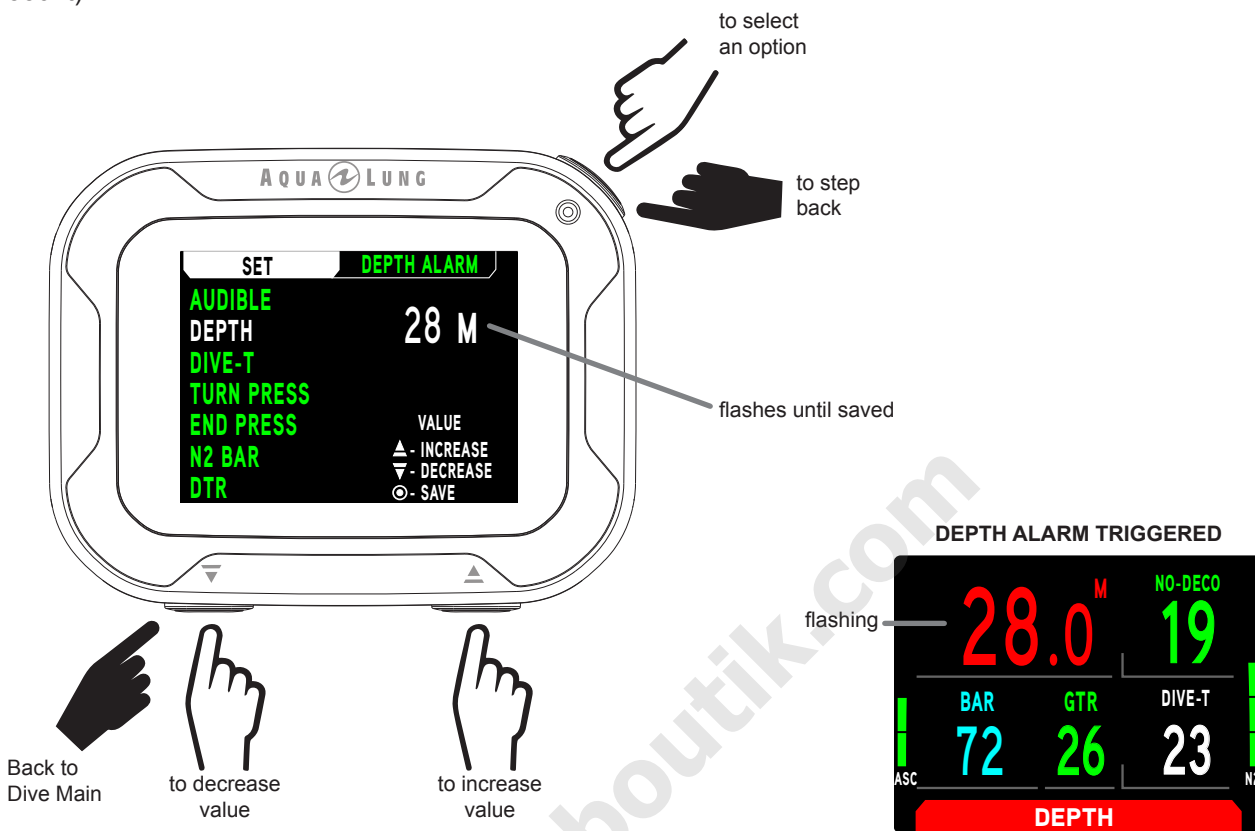


3. Dive-T

The Dive Time Alarm allows you to set an alarm to go off at a predetermined amount of dive time. Settings include OFF or 10 - 180 min.

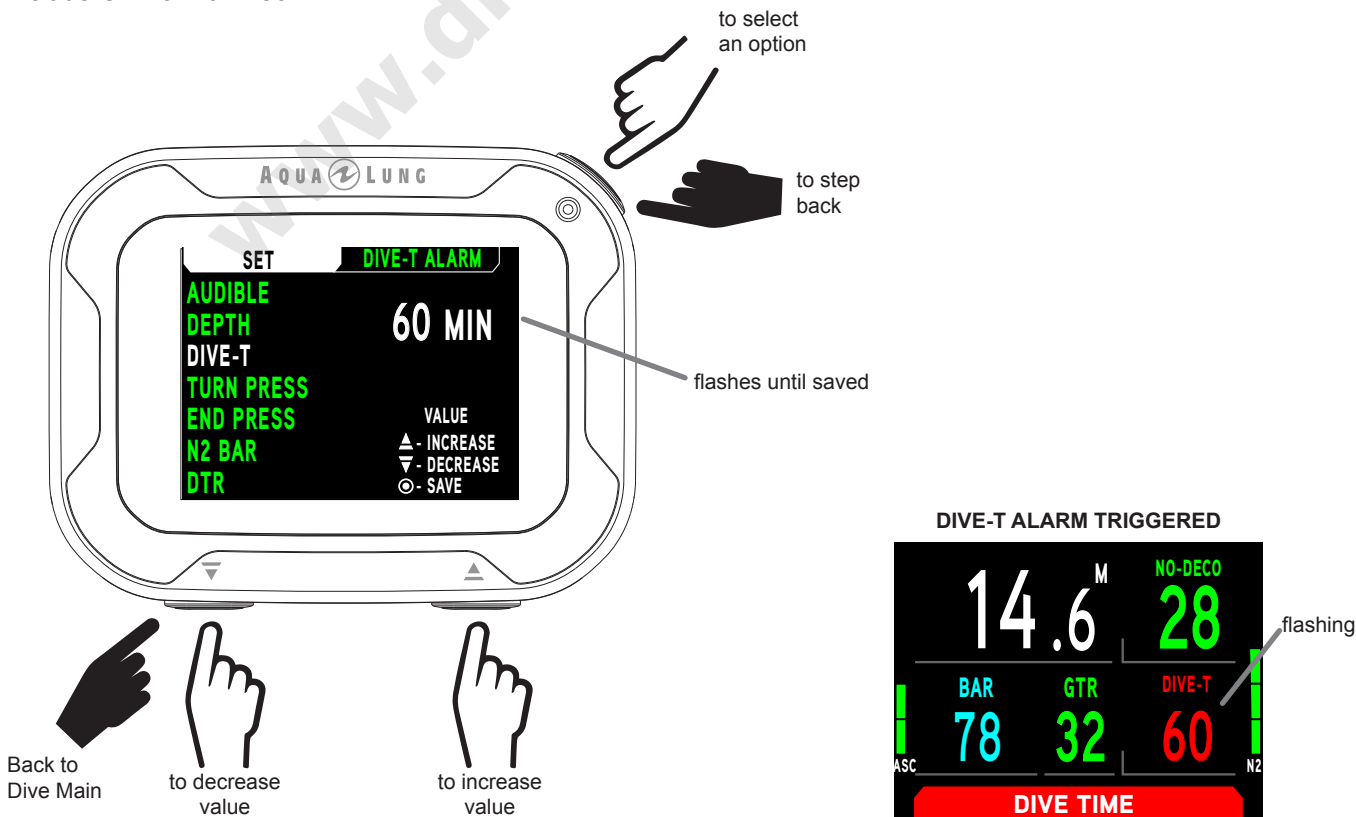

4. Turn Press


The Turn Pressure Alarm allows you to set an alarm to trigger at a designated turn pressure.

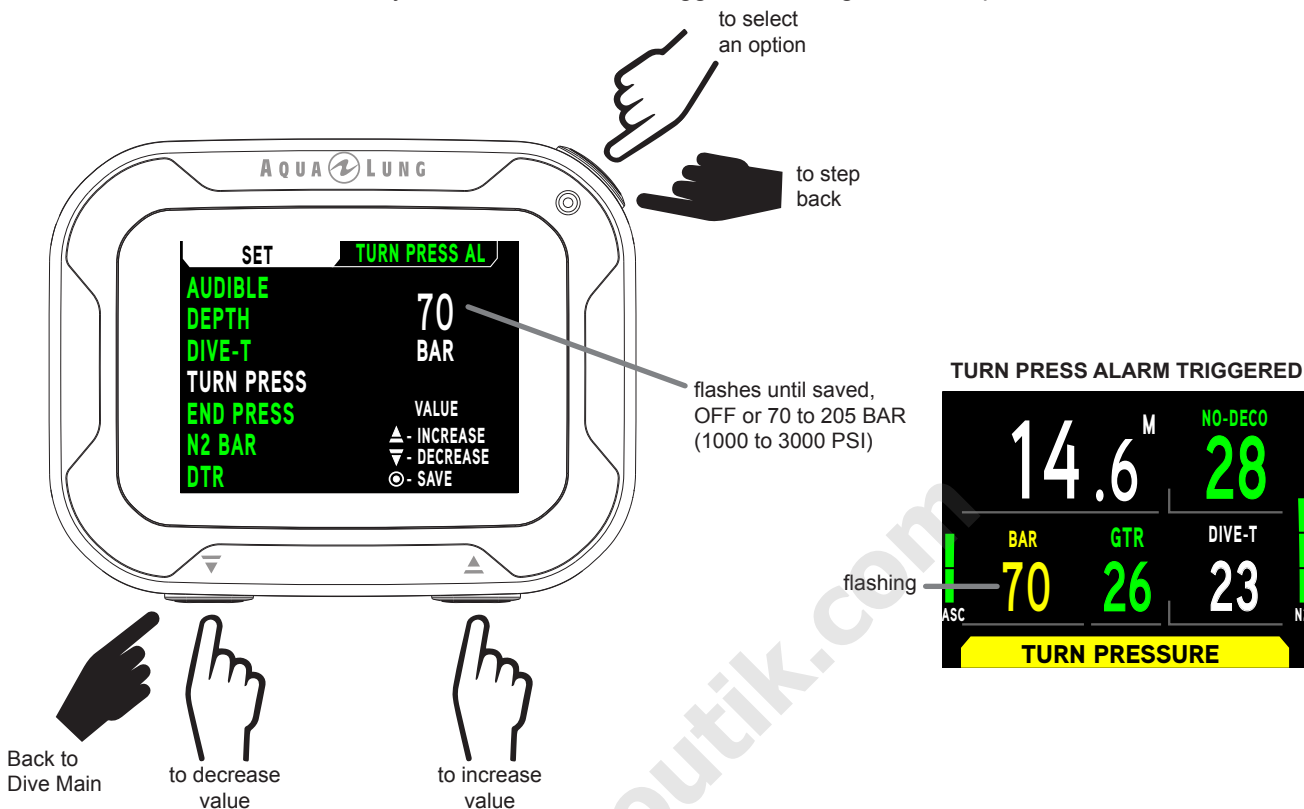

5. End Press


The End Pressure Alarm allows you to set an alarm for when you reach a designated end pressure.

NOTE: The Pressure Alarm only considers the active gas when diving with multiple gas transmitters.

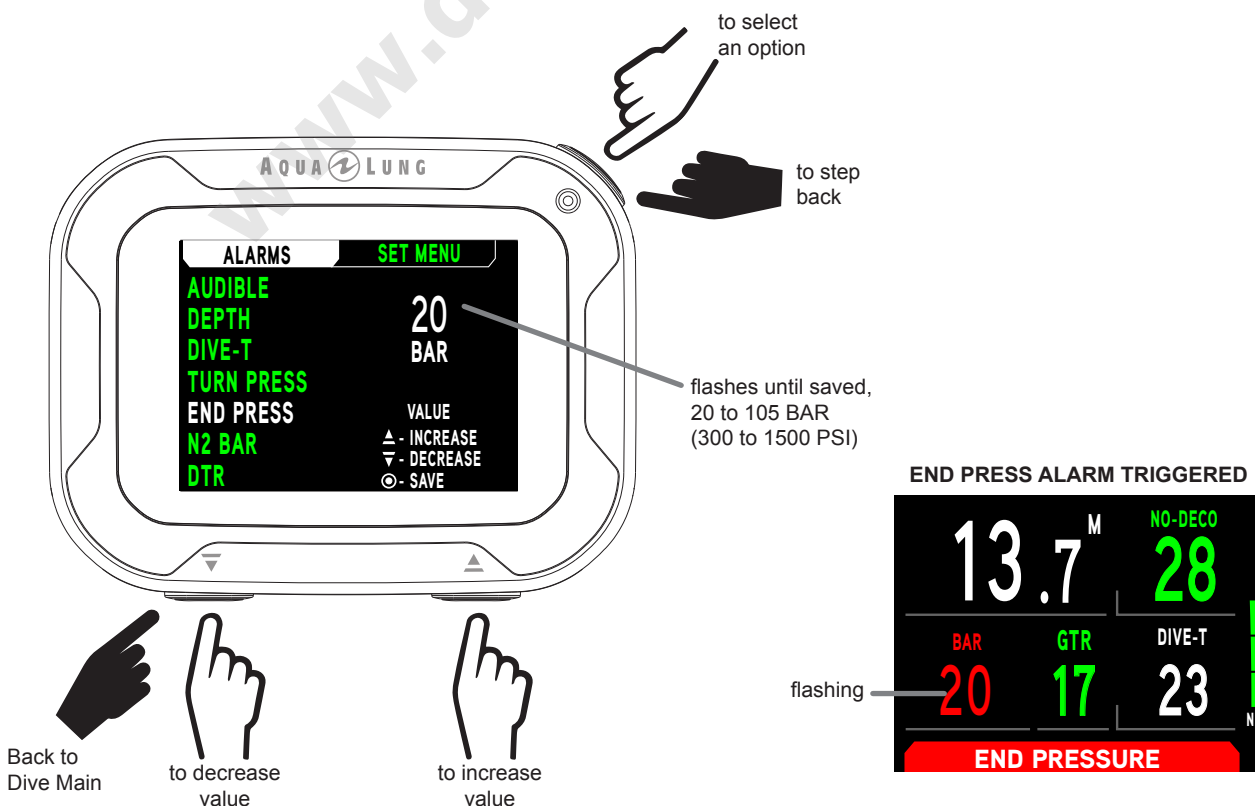


6. N2 Bar

This feature allows you to set an alarm to go off at a predetermined number of N2 bar graph segments being filled.

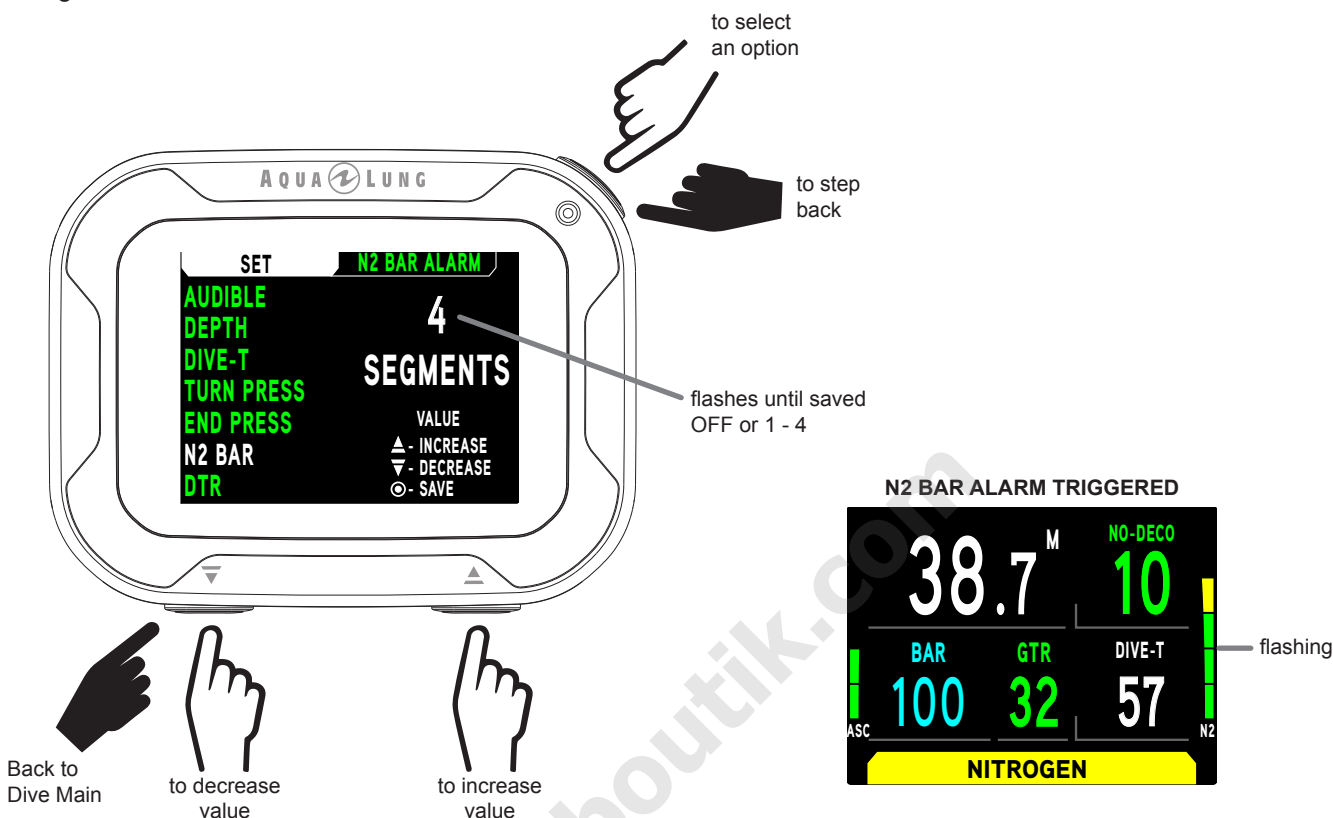


7. DTR

The Dive Time Remaining Alarm allows you to set an alarm to go off with a designated reserve. Settings include OFF or 5 - 20 min of dive time remaining.

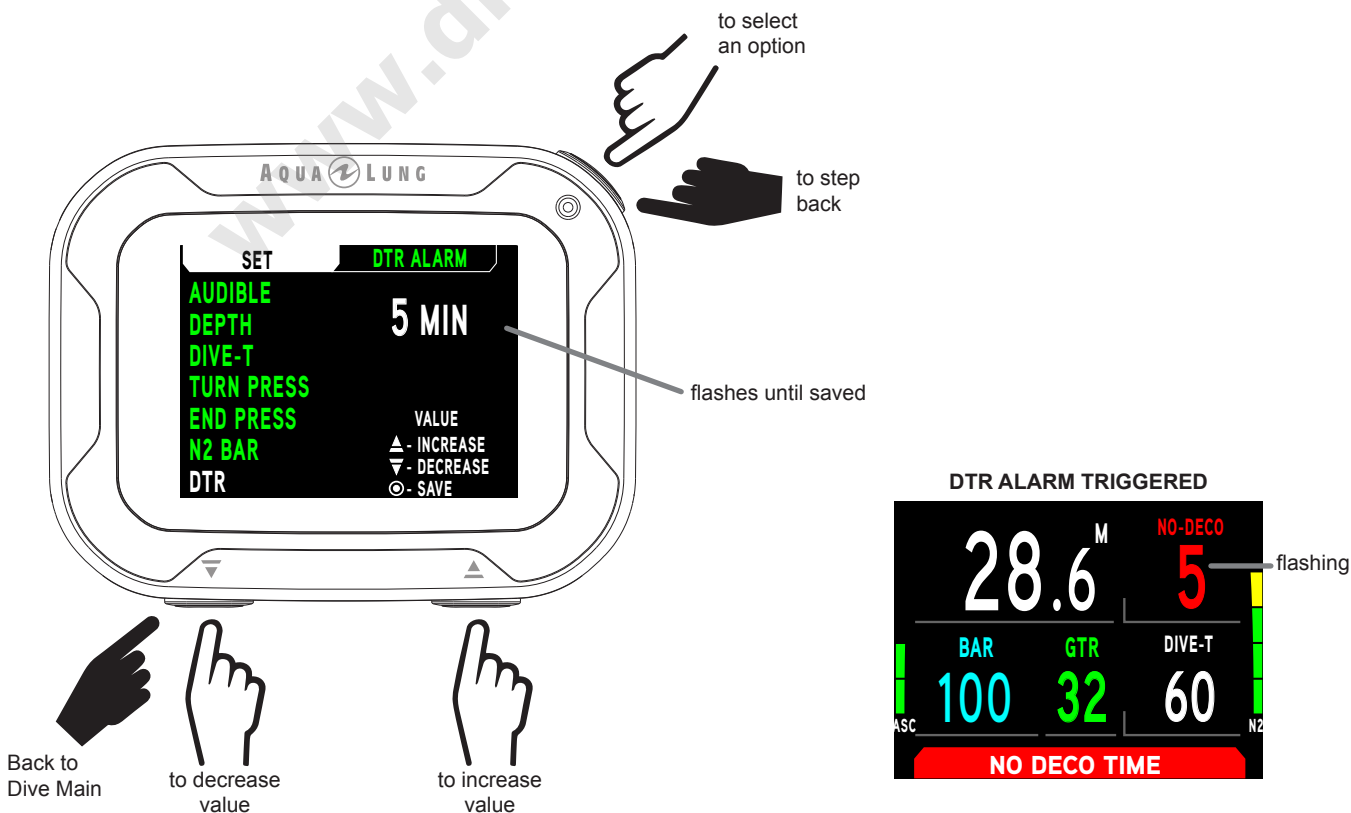


SET UTILITIES

Within the Set Utilities menu you can customize the following six operational functions.

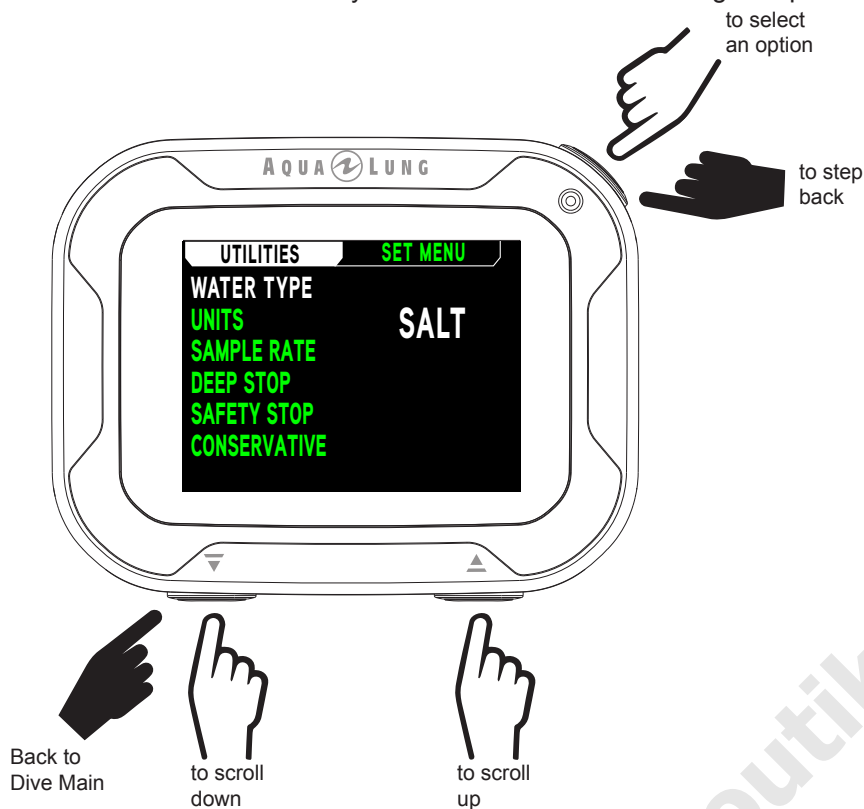


1. WATER TYPE

The Water Type feature allows you to set SALT or FRESH water environment for accurate depth calculations.

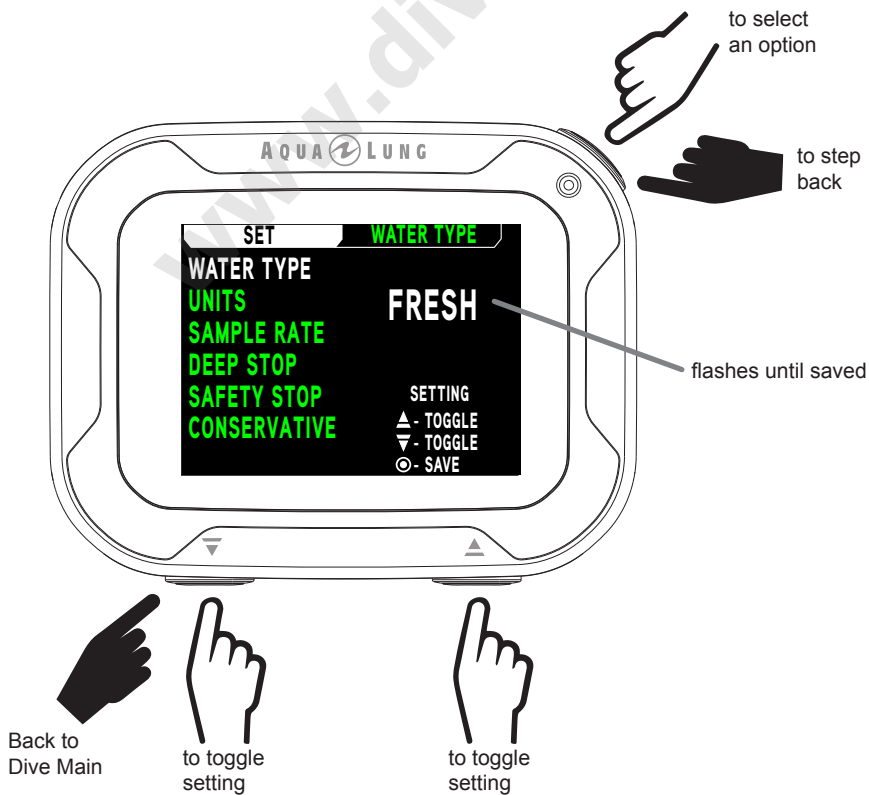

2. UNITS


The Units feature allows you to select whether Metric (M, BAR) or Imperial (FT, PSI) units of measure will be displayed.

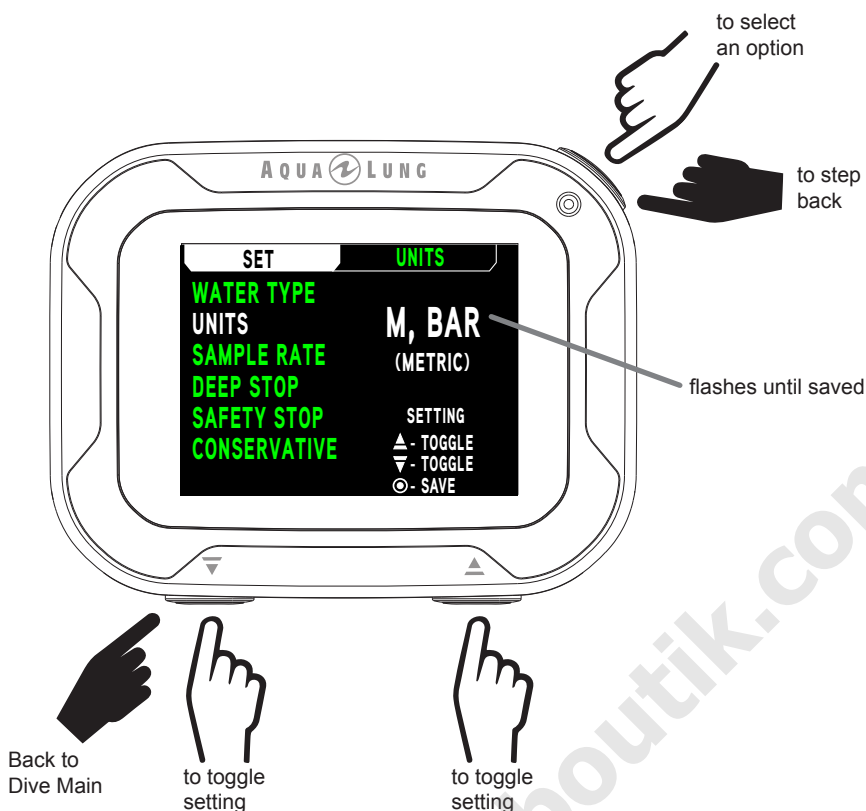

3. SAMPLE RATE

The Sample Rate controls how frequently the i770R stores a data snapshot for Diverlog + Download during a dive. Setting options are 2, 15, 30, or 60 second intervals. Shorter intervals will provide a more precise record of your dives.


NOTE: New data will automatically overwrite the oldest data in memory when the memory becomes full. The i770R Log and Diverlog + Download data is stored separately in different partitions of the memory. The Log only stores a short summary of each dive. Alternately, the Diverlog + Download function stores much larger files for each dive. Depending on the chosen settings and dive durations, it is possible to see dives stored in the i770R's on-board Log that have already been overwritten in the Diverlog + Download Partition. Choosing a longer Sample Rate interval will consume less memory per dive. Remember to download your dives more frequently if you are using a shorter Sample Rate interval.

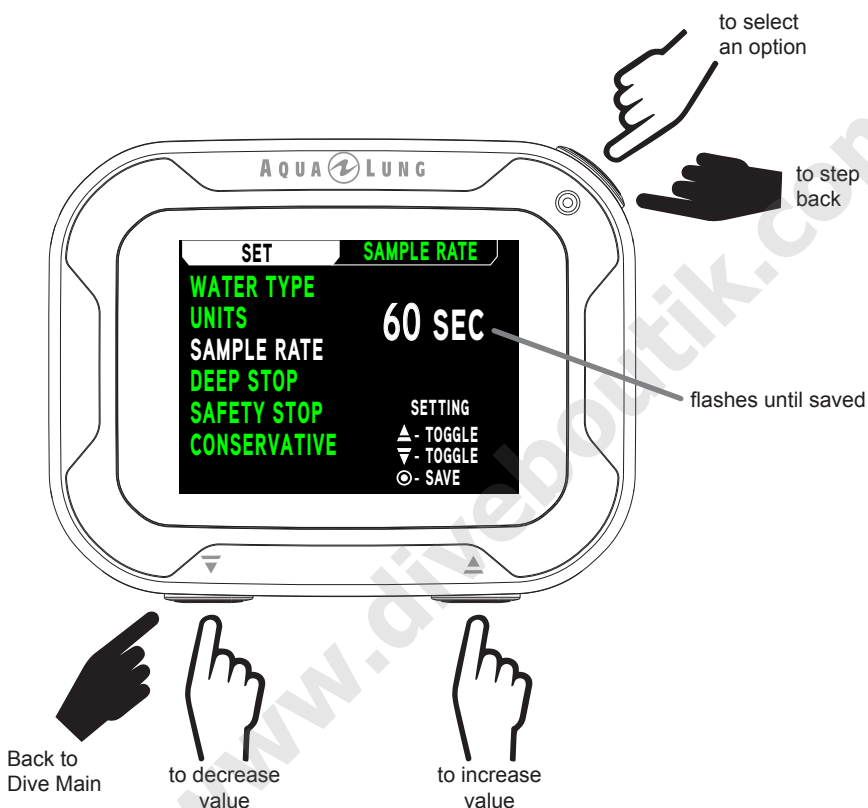

DIVE & GAUGE MODE DOWNLOAD MEMORY CAPACITY	
SAMPLE RATE (seconds)	MAXIMUM HOURS
2	218
15	1638
30	3276
60	6553


4. DEEP STOP


The Deep Stop feature can be set ON or OFF.

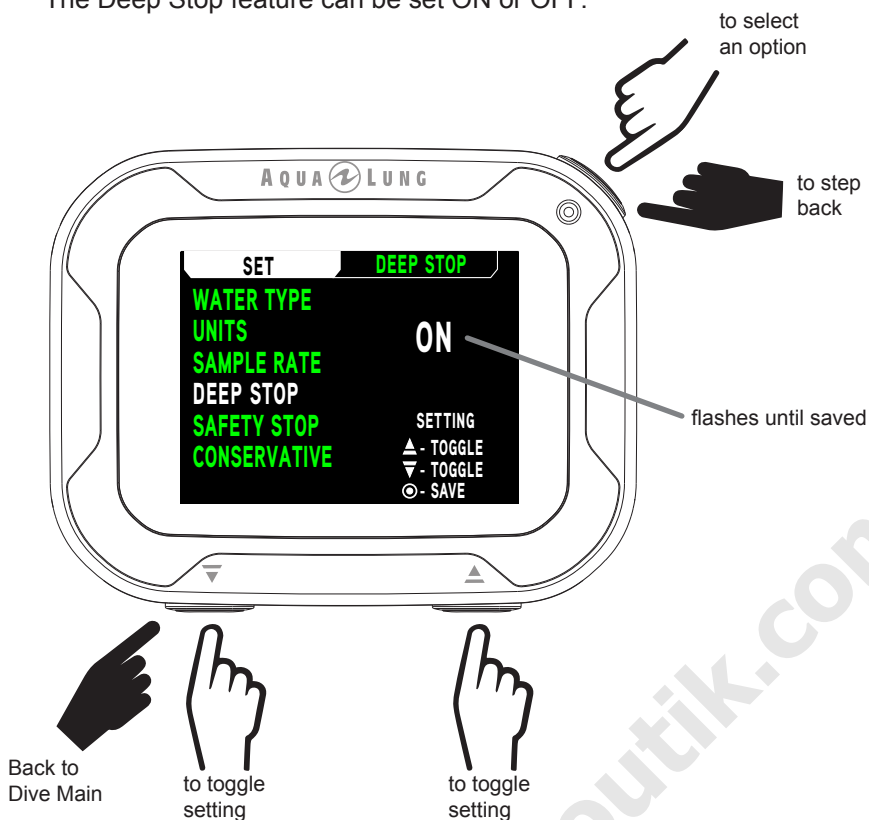

5. SAFETY STOP


The Safety Stop feature can be set ON or OFF. If SET is selected, you may choose from an available 3 or 5 min Safety Stop at depths of 3, 4, 5, or 6 m (10, 15, or 20 ft).

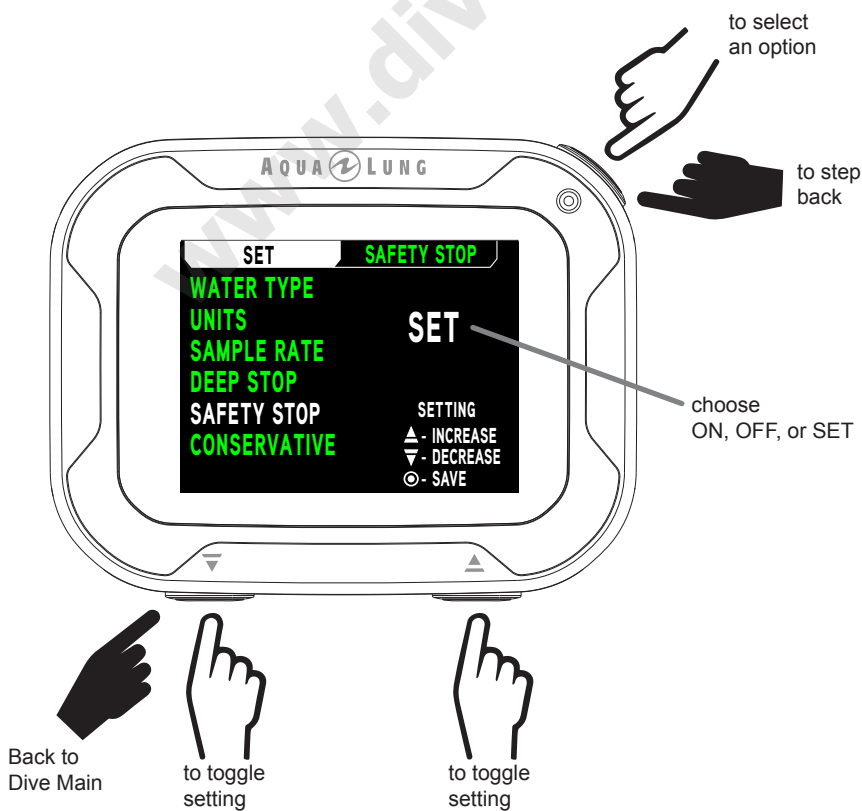

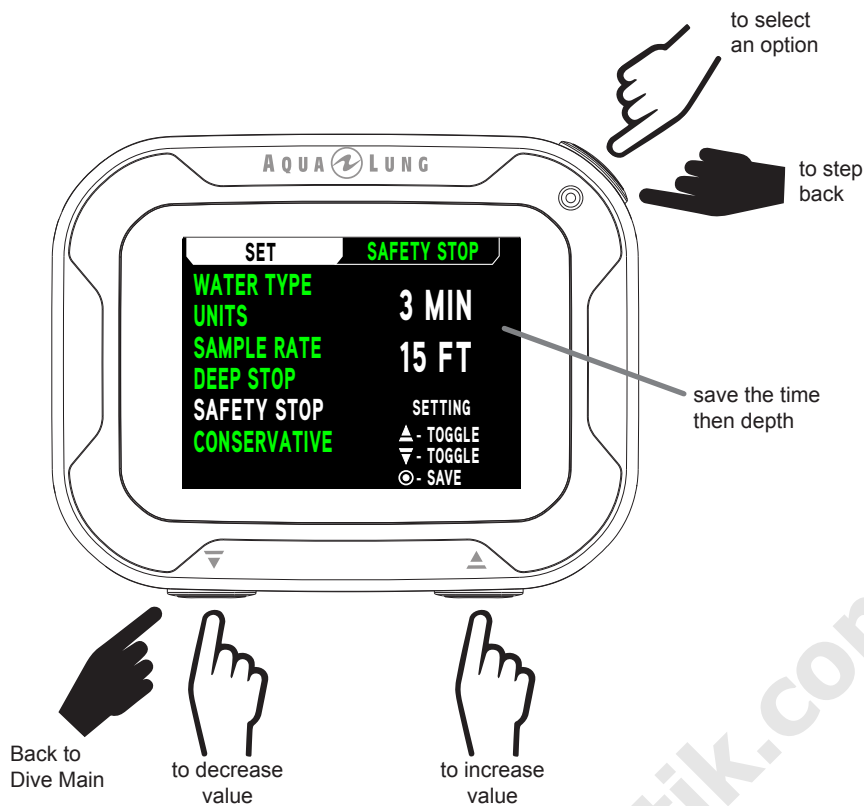

6. CONSERVATIVE


The Conservative feature (see pg. 28) can be set ON or OFF.

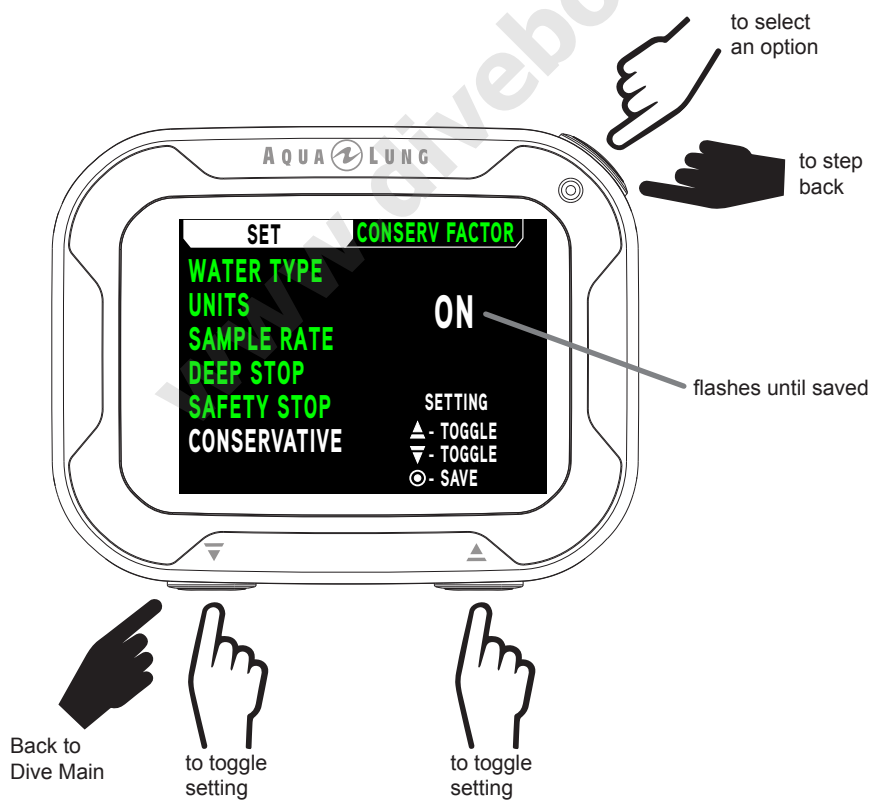

PLAN

This mode calculates dive depth and time limits. To do so, it accounts for any residual nitrogen, oxygen, surface intervals, the programmed gas mix, and PO₂ alarm setting. Either NO DECO (No Decompression) or O₂ TIME limits are displayed, depending on whether nitrogen or oxygen levels will be the limiting factor.

NOTE: Depths exceeding the MOD (Maximum Operating Depth), if nitrox, or that have less than 1 minute allowed dive time will not be displayed.

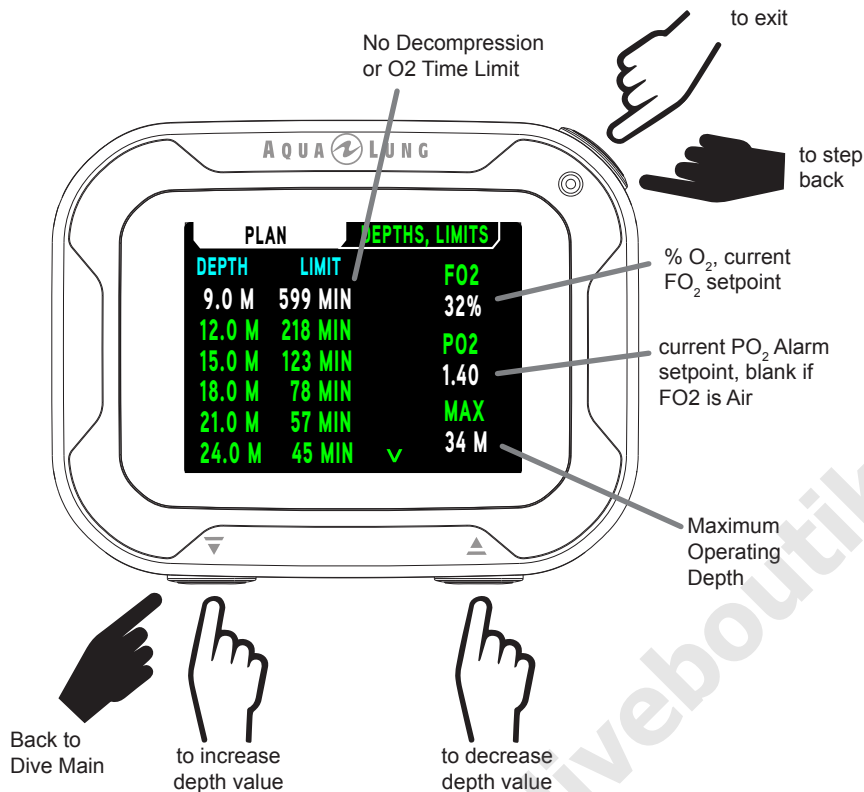


SET GAS


Within this submenu you can change the available gas mixes from OFF, AIR, or to any nitrox mix between 21 - 100 FO₂ (% O₂). Nitrox mixes are displayed with their corresponding MOD (Maximum Operating Depth) and the current PO₂ Alarm setting for the selected gas. Default settings are FO₂ AIR with no PO₂ alarm value for Gas 1, and OFF for Gas 2, 3, and 4. If you save a nitrox mix value for any gas, the i770R will highlight the PO₂ alarm value allowing it to be set. Additionally, the i770R allows for each gas (1 - 4) to have individual PO₂ alarm settings.

NOTE: Once any Gas is set for Nitrox, any other Gas set for AIR will automatically be set to 21%. If a nitrox dive is made, the AIR option will not be displayed as an FO₂ setting until 24 hours elapse after the last dive.

NOTE: When FO₂ is set for AIR, oxygen related data (such as PO₂, % O₂) will not be displayed in Plan Mode. Though these oxygen values will be tracked internally for use in any subsequent nitrox dives.

NOTE: Gas 1 cannot be set to OFF.

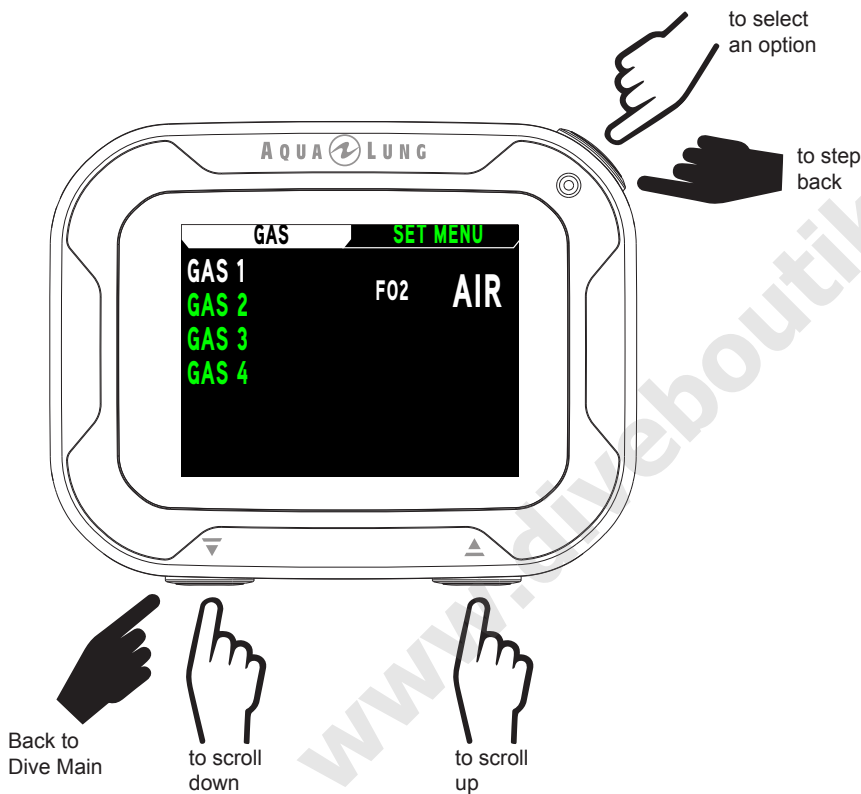


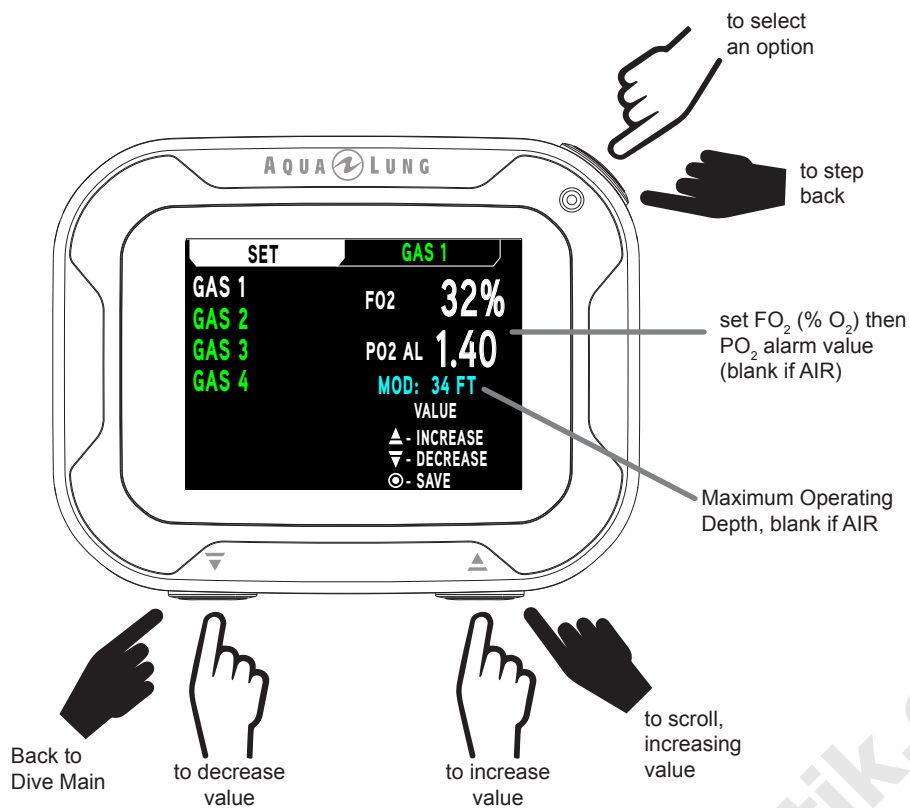

DIVE OPERATION

INITIATING A DIVE


With the i770R in Dive Mode, a dive will commence upon descending to 1.5 m (5 ft) for at least 5 seconds. Below is a diagram to help you navigate Dive Mode functions.

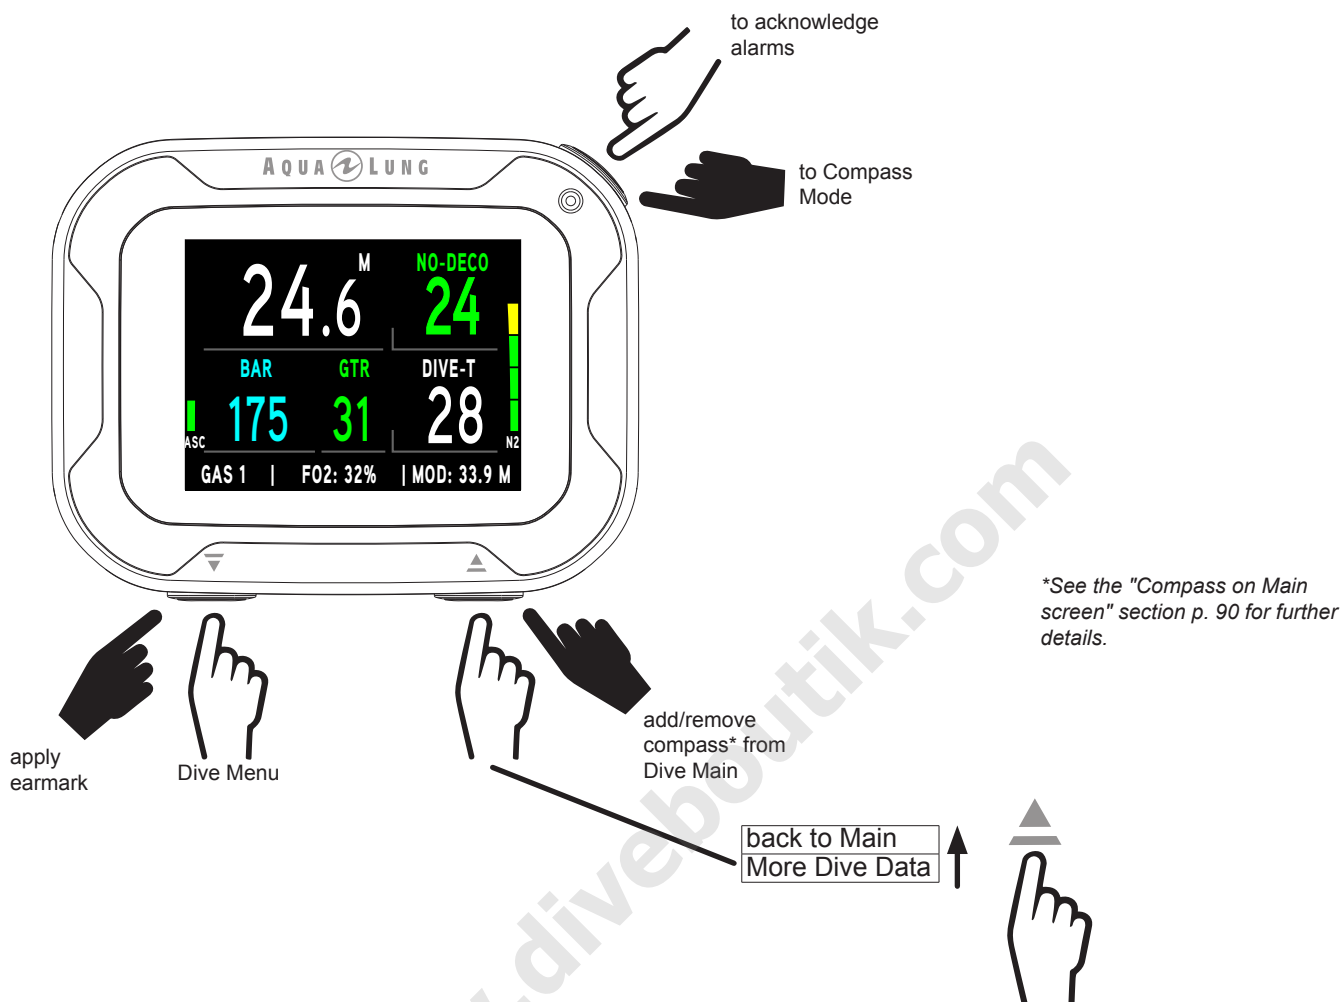

NO DECOMPRESSION DIVE MAIN

From the Main screen you can see all critical dive parameters. During a dive an audible alarm may sound and the priority of information displayed may change. This is to indicate a safety recommendation, warning, or alarm. The following information in this chapter demonstrates and describes an uneventful dive, in terms of safety. Alarms are described in the Complications section of this chapter.

⚠ WARNING: Before diving with the i770R take time to familiarize yourself with both normal and alarm conditions of operation.

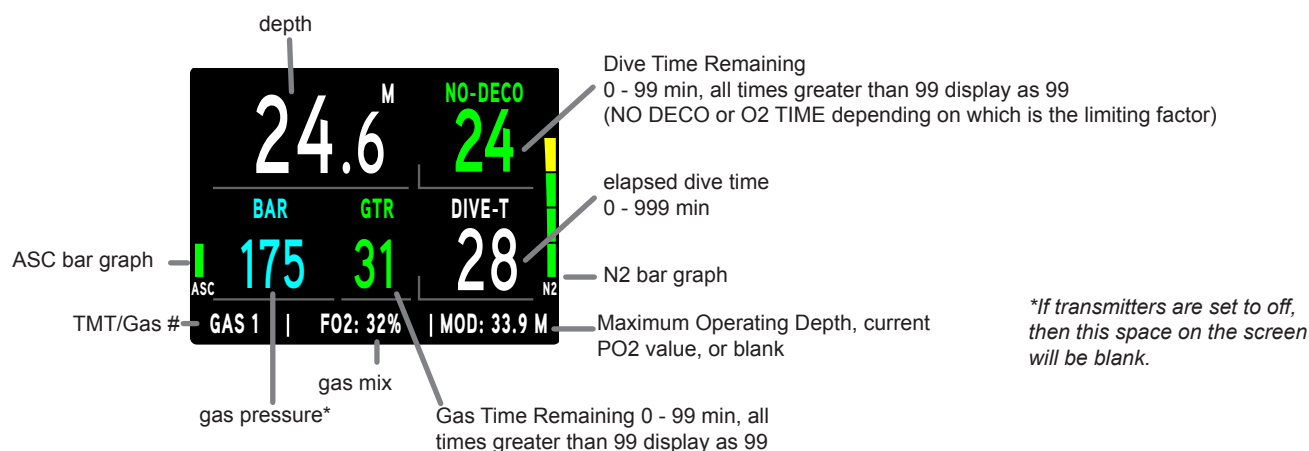

MORE DIVE DATA

This screen simply displays additional data that is not displayed on the Dive Main screen.


NOTE: The Max Depth and Date fields will be replaced with No Deco and Dive-T respectively during a Deep Stop or Safety Stop.

DIVE	MORE DIVE DATA
MAX DEPTH	40 M
DATE	7.23.17
TIME OF DAY	11:46 AM
TEMPERATURE	23 °C
ELEV	SEA
O2 SAT	24 %
CURRENT PO2	0.84

% O₂ saturation
0 - 100


EARMARK

By holding the ▼ (Down) button during a dive you can manually record a data snapshot which can later be accessed using the i770R's download feature. The message "EARMARK APPLIED" will be displayed for 3 seconds as confirmation after an earmark is made.

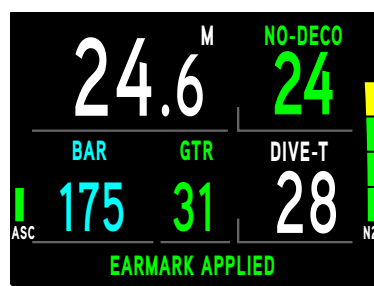

DIVE MENU

Within the Dive Menu you can switch gases, make changes to the display, and preview the DS (Deep Stop) if triggered.

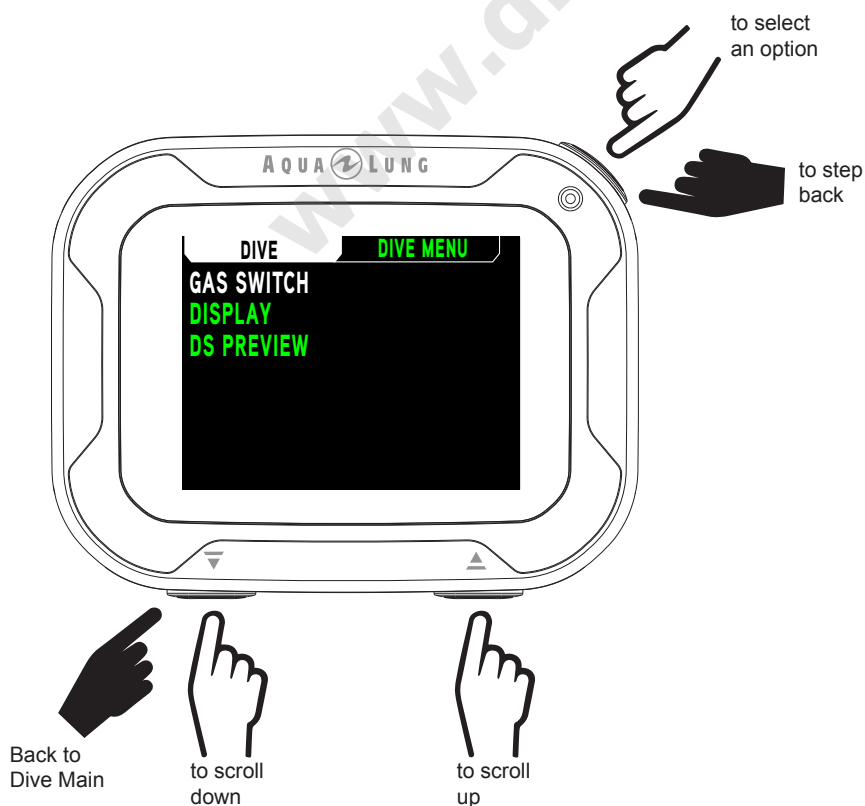


1. GAS (& TRANSMITTER) SWITCH

⚠ WARNINGS:

- Historically, many accidents and near misses have occurred by switching to the wrong gas at the wrong depth. **DO NOT** attempt gas switch decompression dives without proper education and training to do so from an internationally recognized training agency.
- Diving deeper than 39 m (130 ft), will greatly increase your risk of decompression sickness.
- Decompression diving is inherently hazardous and greatly increases your risk of decompression sickness, even when performed according to the dive computer's calculations.
- Using an i770R is no guarantee of avoiding decompression sickness.
- The i770R enters Violation Mode when a situation exceeds its capacity to predict an ascent procedure. These dives represent gross excursions into decompression that are beyond the boundaries and spirit of the i770R's design. If you are following these dive profiles, Aqua Lung advises that you should not use an i770R.
- If you exceed certain limits, the i770R will not be able to help you get safely back to the surface. These situations exceed tested limits and can result in loss of some functions for 24 hours after the dive in which a violation occurred.

OVERVIEW

- All dives begin with GAS 1 and TMT (transmitter) 1.
- The GAS and TMT default to # 1 after 10 minutes on the surface.
- Gas switches can only be made when a Dive Main screen is displayed.
- Gases cannot be switched while on the surface.
- The Gas Switch Menu cannot be accessed during the sounding of alarms.
- If an alarm strikes while in the Gas Switch Menu, the switch operation is terminated (reverting to the Dive Main screen).

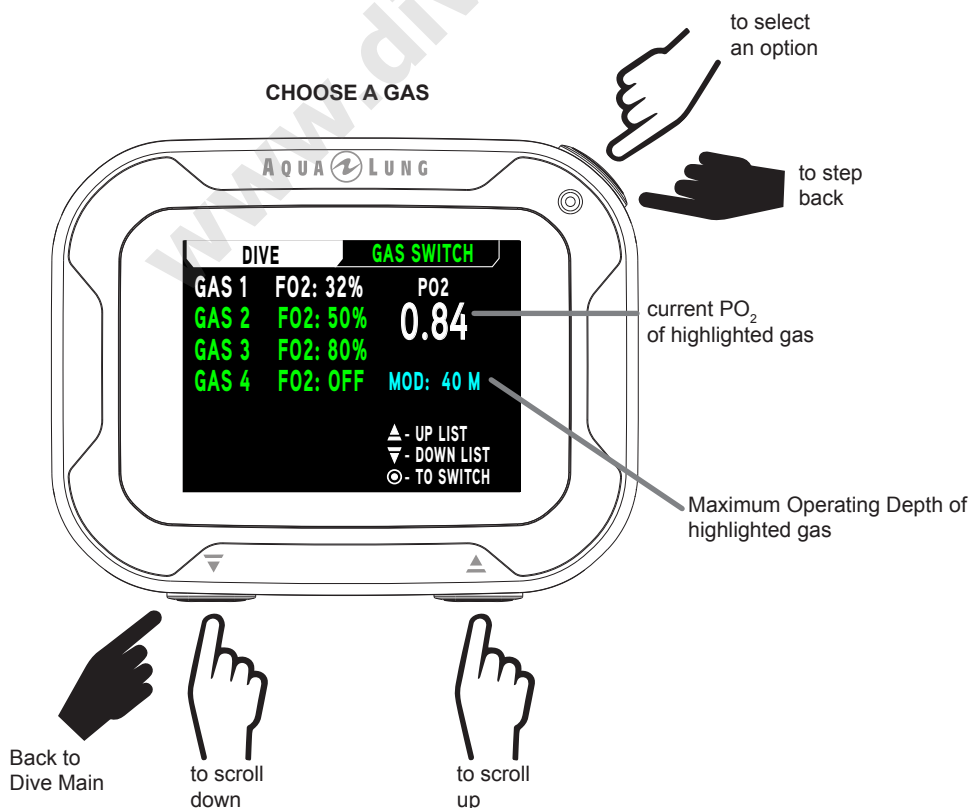

SEARCHING FOR TRANSMITTER

DIVE	GAS SWITCH
GAS 1 F02: AIR	SEARCH FOR TMT 3
GAS 2 F02: 32%	
GAS 3 F02: 80%	
GAS 4 F02: OFF	

NOTE: If no TMT is active the Searching screen will be bypassed.

If the transmitter is not reporting, a message will be displayed for 10 seconds before switching gas. Afterwards, the i770R will calculate for the gas change but the Dive Main screen will show a lost transmitter signal.

DIVE	GAS SWITCH
GAS 1 F02: AIR	TMT 3 NOT AVAILABLE
GAS 2 F02: 32%	
GAS 3 F02: 80%	
GAS 4 F02: OFF	

If the current PO_2 value is greater than 1.6, then a warning not to switch will display. The i770R will maintain the current gas without switching. The diver may override the i770R and force the gas switch by pressing the \odot (Select) button during the DO NOT SWITCH TO GAS 1 (2,3, or 4) HIGH PO_2 message.

⚠ WARNING: Switching to gases with a PO_2 above 1.6 has a high risk of oxygen poisoning, convulsions, and drowning. Doing so should always be avoided. It is intended as a last resort option because of the likelihood of injury or drowning. Always dive within your training, experience, and skill level.

DIVE		GAS SWITCH	
GAS 1	F02: AIR	PO2	1.64 DO NOT SWITCH TO GAS 3 HIGH PO2
GAS 2	F02: 32%		
GAS 3	F02: 80%		
GAS 4	F02: OFF		
		▲ - UP LIST	
		▼ - DOWN LIST	
		○ - TO SWITCH	


2. DISPLAY

This feature functions the same, minus the Auto Dim setting, as it does on the surface in the Setup Menu described previously on page 16.

3. DS (DEEP STOP) PREVIEW

If Deep Stop was set to ON in the Utilities Menu, the Deep Stop Preview screen is available after exceeding 24 m (80 ft) of depth. The Deep Stop is always at a depth half that of your maximum depth during the dive. This preview screen keeps track of that depth for you.


NOTE: If the Deep Stop feature is set OFF, this screen will display the message, "DEEP STOP IS SET OFF." Also, the message, "DEEP STOP TRIGGERS BELOW 24 M (80 FT)" will be displayed on this screen if that depth has not been exceeded yet during the dive.

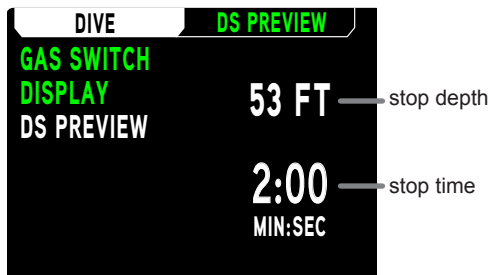

DEEP STOP MAIN

If triggered, the Deep Stop will activate upon ascending to within 3 m (10 ft) below the calculated Deep Stop depth. The stop time will be displayed and count down to 0:00 as long as you stay within 3 m (10 ft) above or below the stop. See Deep Stop in the Dive Features chapter for further details.


NOTE: The i770R does not penalize for a missed Deep Stop.

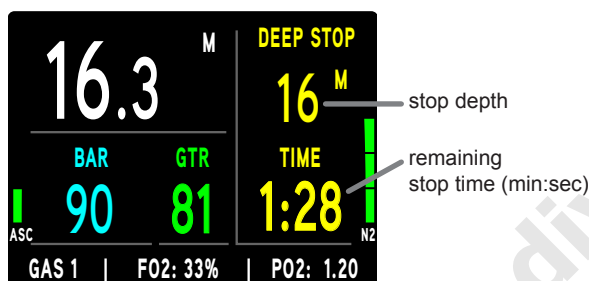

SAFETY STOP MAIN

If triggered, the Safety Stop will activate upon ascent to within 1.5 m (5ft) deeper than the Safety Stop depth on a No Decompression dive. The stop time will then countdown to 0:00. See Safety Stop in the Dive Features chapter for further details.


NOTE: The i770R does not penalize for a missed Safety Stop.

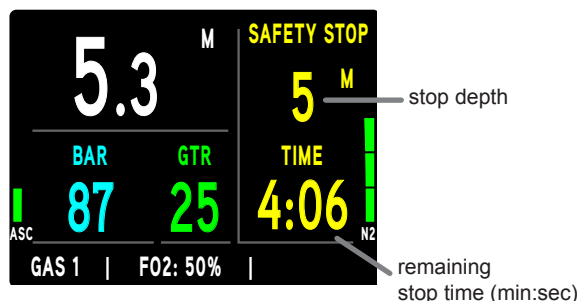

SURFACING

Upon ascending to 0.9 m (3 ft) the i770R transitions to Dive Surface Mode.

NOTE: The i770R requires a 10 minute surface interval to record a subsequent dive as a separate dive in the Log. Otherwise, the dives will be combined and recorded as a single dive in the i770R memory.

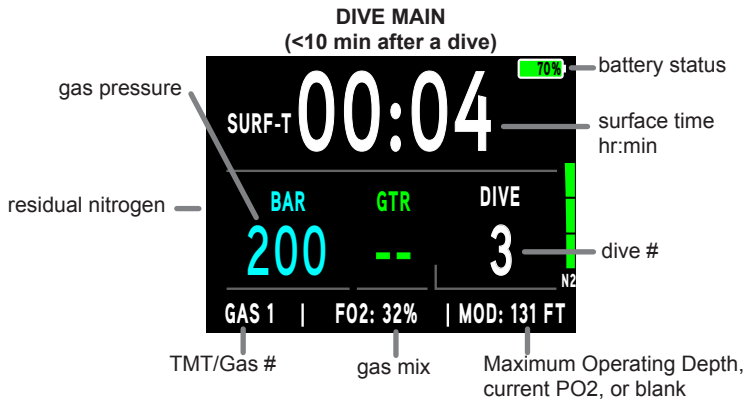

COMPLICATIONS

The preceding information has described standard dive operations. Your new i770R is also designed to help you to the surface in less than ideal situations. The following is a description of these situations. Take some time to familiarize yourself with these operations before diving your i770R.


DECOMPRESSION

Decompression (deco) Mode activates when theoretical No Decompression time and depth limits are exceeded. Upon entry into deco, the audible alarm will sound. The full N2 bar Graph and Up Arrows will flash until the audible is silenced.

To fulfill your decompression obligation, you should make a safe controlled ascent to a depth slightly deeper than, or equal to, the required stop depth indicated and decompress for the stop time indicated. The amount of decompression credit time that you receive is dependent on Depth, with slightly less credit given the deeper you are below the Stop Depth indicated. You should stay slightly deeper than the required Stop Depth indicated until the next shallower Stop Depth appears. Then you can slowly ascend to that indicated Stop Depth but not shallower.


DECOMPRESSION ENTRY

Upon entry into decompression (deco) the audible alarm will sound until the audible is silenced. The message DECO ENTRY, up arrow, and full N2 Bar Graph icons will flash. Additionally, the stop depth and stop time values will be displayed. TTS (Time To Surface) and DIVE-T (Dive-Time) can be seen on the Deco More Dive Data screen during decompression by pressing the Δ (UP) button.

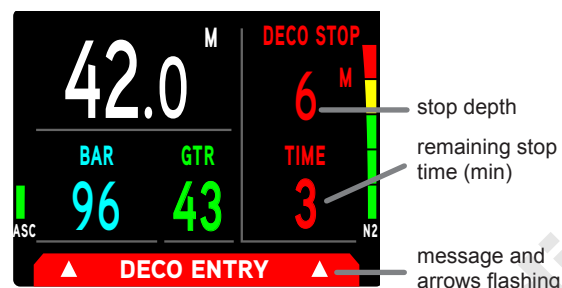


GAS SWITCH WARNING

If multiple gasses are set on and the current gas is not the best gas when approaching the decompression stop zone, the i770R will warn you to switch gases. You must confirm the gas switch by pressing the \odot (Select) button. If the gas switch is not confirmed within 30 seconds, no switch will be made. Though you may still manually switch gases at any time throughout the dive by using the Gas Switch Menu.

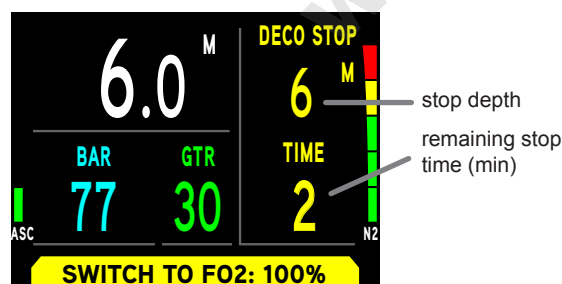

DECOMPRESSION STOP MAIN


Decompression (deco) Stop Main will display upon ascending to within 3 m (10 ft) below the Deco Stop depth. The stop time and stop depth will change to yellow. While Deco Stop Main is displayed, you may access the Deco More Dive Data screen by pressing the Δ (UP) button. It is similar to the Dive More Dive Data screen.

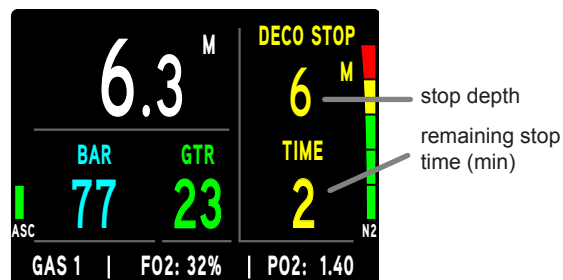

CONDITIONAL VIOLATION (CV)

Upon ascent above the required Decompression (deco) Stop depth, operation will enter Conditional Violation during which time no off gassing credit will be given. The Audible alarm will sound. Additionally, the DOWN TO STOP message will flash until the audible alarm is silenced.

- The down arrows continues to flash until descending below the required Stop Depth (within stop zone). At such time, the DOWN TO STOP and down arrows will be removed and the deco stop and deco stop time will be yellow.
- If you descend deeper than the required Decompression Stop before 5 minutes elapse, Decompression operation will continue with no off gassing credit given for time above the Stop. Instead, for each minute above the Stop 1½ minutes of penalty time will be added to the required Stop Time.
- The combined penalty time and original decompression time will be displayed as the new stop time upon descending to the stop depth. The N2 Bar Graph and stop time will start to recede into the No Decompression zone. Operation will revert to No Decompression Mode once all the decompression is cleared.


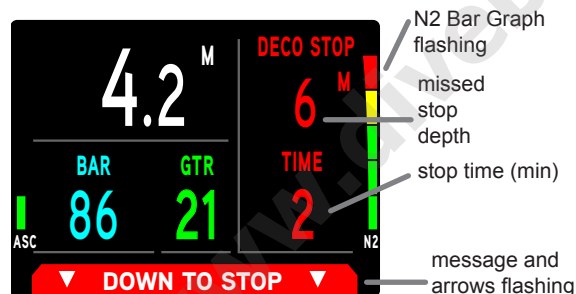


DELAYED VIOLATION 1 (DV 1)

If you remain shallower than a Deco Stop Depth for more than 5 minutes, operation will enter DV1* which is a continuation of CV with penalty time still being added. Again, the audible alarm will sound and the DOWN TO STOP message will flash until the audible alarm is silenced


**The difference from Conditional Violation is that the i770R will now enter Violation Gauge Mode 5 minutes after surfacing regardless of clearing the decompression stops before surfacing.*

- Down arrows and DOWN TO STOP message continue to flash until descending below the required Stop Depth, then the full stop graphic will be on solid.
- If the DV1 status is ignored, the i770R will enter DV1 Surface Mode for 5 minutes upon surfacing from the dive. Down arrows and Deco Stop depth/time will flash. After 5 minutes on the surface in DV1 Mode, the unit will enter VGM (Violation Gauge Mode).

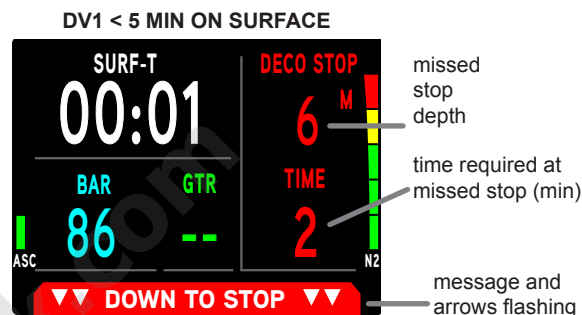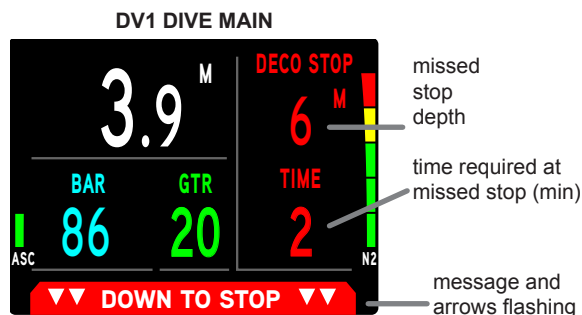

DELAYED VIOLATION 2 (DV 2)

If the calculated Decompression obligation requires a Stop Depth between 18 m (60 ft) and 21 m (70 ft), operation will enter DV2. The audible alarm will sound. Additionally, the full N2 Bar Graph will flash until the audible is silenced. The i770R will advance to Violation Gauge Mode (see below section) if the required decompression stop depth exceeds 21 m (70 ft).

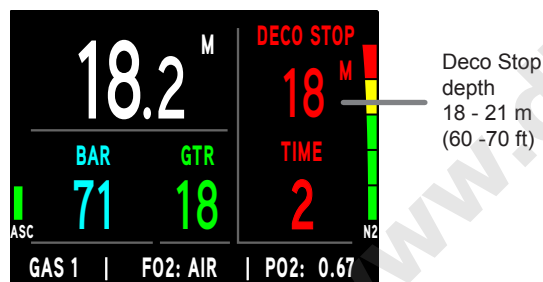


DELAYED VIOLATION 3 (DV 3)

If you descend deeper than the maximum functional depth*, the audible alarm will sound. Also, the up arrows, and TOO DEEP message will flash. Only dashes will display for Current Depth signifying that you are too deep. The DTR (NO-DECO or O2 TIME) time will continue to display until the i770R's calculation range is exceeded.


*The maximum functional depth (Dive/Gauge/Free = 100 m / 330 ft) is the depth at which the i770R can properly perform all functions.

Upon ascending above the maximum functional depth, current depth will be restored. However, the log for that dive will display dashes for max depth.

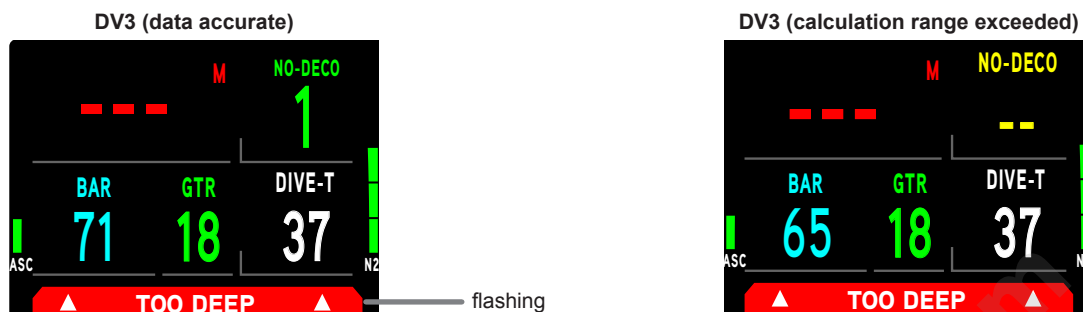

VIOLATION GAUGE MODE (VGM) DURING A DIVE

During Dive Mode dives, operation will enter VGM when Decompression requires a Stop Depth greater than 21 m (70 ft). It will also enter VGM if Deco is activated during a dive in Free Mode, described later. Operation would then continue in VGM during the remainder of that dive and for 24 hours after surfacing. VGM turns the i770R into a digital instrument without any decompression or oxygen related calculations or displays. Upon activation of VGM, the audible alarm will sound. The message VIOLATION and GO UP with up arrows will flash. After the audible alarm becomes silent (10 seconds), the NO DECO (No Decompression) and N2 Bar Graph will not display for the rest of the dive.

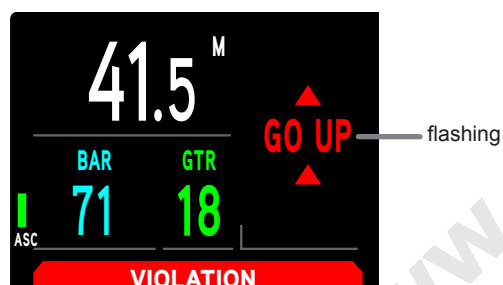

VIOLATION GAUGE MODE (VGM) ON THE SURFACE

The message VIOLATION is displayed until 24 hours elapse with no dives. During that 24 hours, All menus and screens shall be available except items associated with nitrogen and oxygen calculations.

- The Fly countdown timer provides the time remaining before normal operation can resume with full features and functions.
- In the event that a dive is made during the 24 hour lockout period, another full 24 hour surface interval must then be served before all functions are restored.




HIGH PO₂


Alarm >> at Set Point value, except in Deco then at >1.60 only

Alarm

If PO₂ continues to increase and reaches the alarm set point, the audible alarm sounds again. The PO₂ value, GO UP message, and up arrows will flash in place of Dive Time Remaining (O2 TIME, NO-DECO) and DIVE-T until after the audible alarm. At which time the information will alternate. This will continue until PO₂ decreases below the alarm set point.

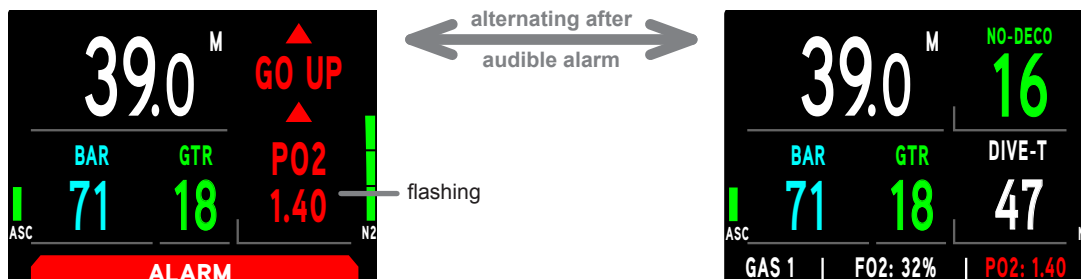**PO₂ During Decompression**

The PO₂ alarm setting does not apply when in Decompression. If PO₂ exceeds 1.60 while at a Decompression Stop, the PO₂ value with icon will flash in place of Dive Time Remaining (O2 TIME, NO-DECO) and DIVE-T until after the audible alarm. At which time the information will alternate. This will continue until the PO₂ value decreases below 1.60.

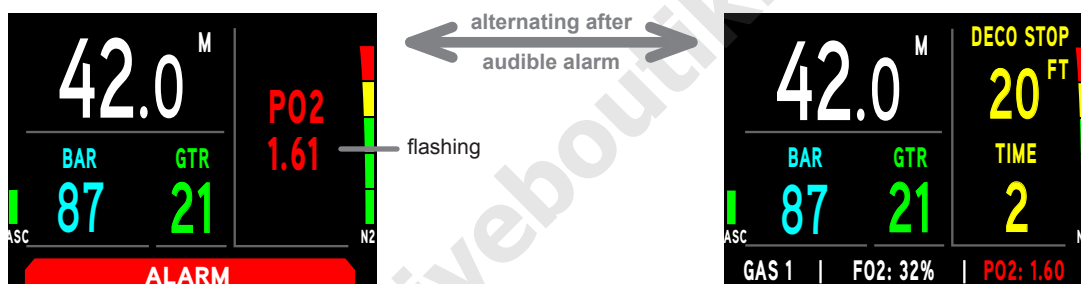
**HIGH O₂ SAT (OXYGEN SATURATION)**

Warning >> at 80 to 99% (240 OTU)

Alarm >> at 100% (300 OTU)


Warning

When O₂ reaches the Warning Level, the audible alarm sounds and the O₂ SAT (saturation) value will flash in place of Dive Time Remaining (O2 TIME, NO-DECO) and DIVE-T. They will be restored when the audible alarm is silenced.

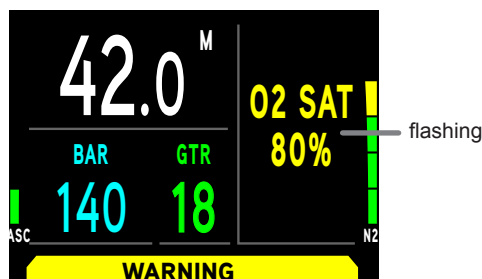


Alarm

If O2 SAT reaches the Alarm level, the audible alarm sounds. The GO UP message, up arrows, and the O2 SAT value will flash in place of Dive Time Remaining (O2 TIME, NO-DECO) and DIVE-T. After the audible alarm the GO UP message, up arrows, and the O2 SAT value will alternate with Dive Time Remaining (O2 TIME, NO-DECO) and DIVE-T.

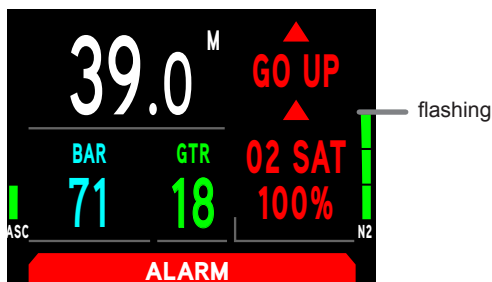


Warning During Decompression

When O2 SAT reaches the Warning Level, the audible alarm sounds and the O2 SAT value will flash in place of Dive Time Remaining (O2 TIME, NO-DECO) and DIVE-T. When the audible alarm is silenced, the standard Decompression Dive screen is restored.

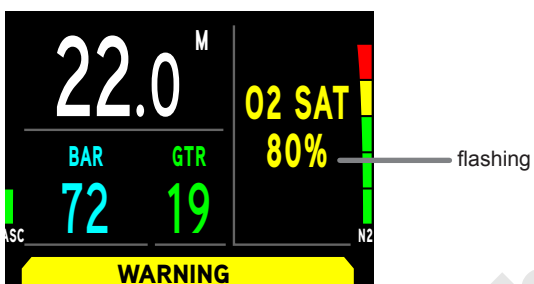

Alarm During Decompression

If O2 SAT reaches the Alarm level, the audible alarm sounds and the O2 SAT 100%, up arrows, and alarm message will flash in place of deco stop depth/time. When the audible alarm is silenced, the message O2 SAT 100% and up arrows will alternate with decompression stop/time.

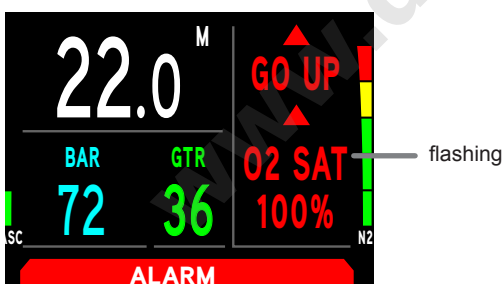


Alarm On Surface

O2 SAT is 100% upon surfacing while in No Decompression:

- O2 SAT 100% will flash until the O2 SAT value decreases below 100%.

The diver surfaces due to 100% O2 while in Deco:

- If O2 SAT becomes less than 100% during the first 5 min on the surface, the Delayed Violation 1 Main screen will be displayed.
- If O2 SAT is still 100% after 5 min, operation is to revert to Violation Gauge Mode for 24 hours.


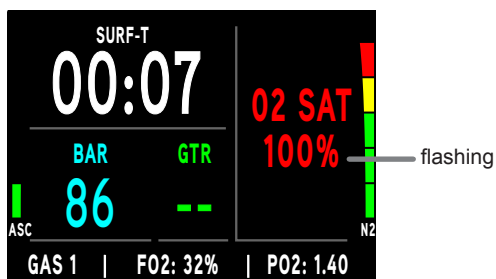


GAUGE MODE

www.diveboutique.com

ON THE SURFACE BEFORE A DIVE

Gauge Surface Main is nearly identical to Dive Mode. Unlike Dive Mode, there will be no N2 tissue saturation or gas mix values displayed.

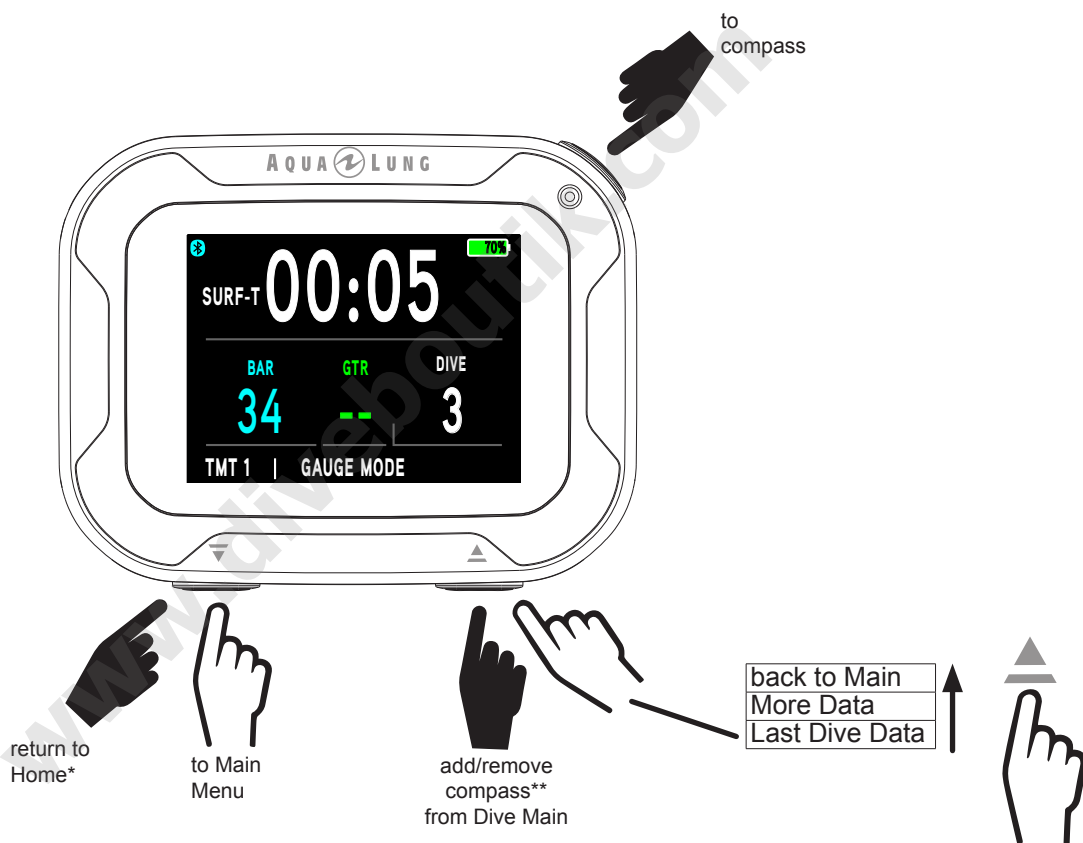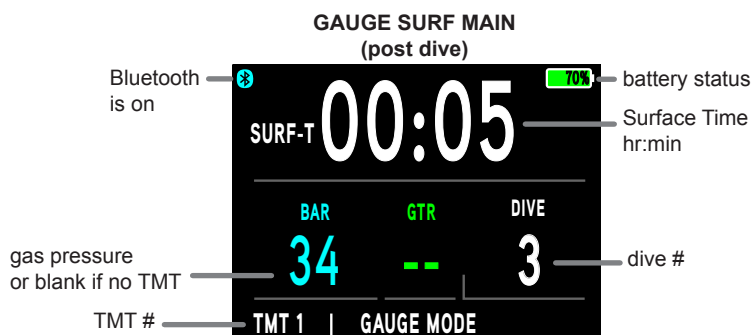


*This function is blocked during the first 10 minutes after a dive.

**See the "Compass On Main Screen" section p. 90 for further details.

GAUGE SURF MAIN MENU


To change transmitter, alarm or other settings you must navigate through the Gauge Menu. Enter the menu by pressing ▼ (Down) button. Press the Ⓢ (Select) button to choose options from the Gauge Menu.

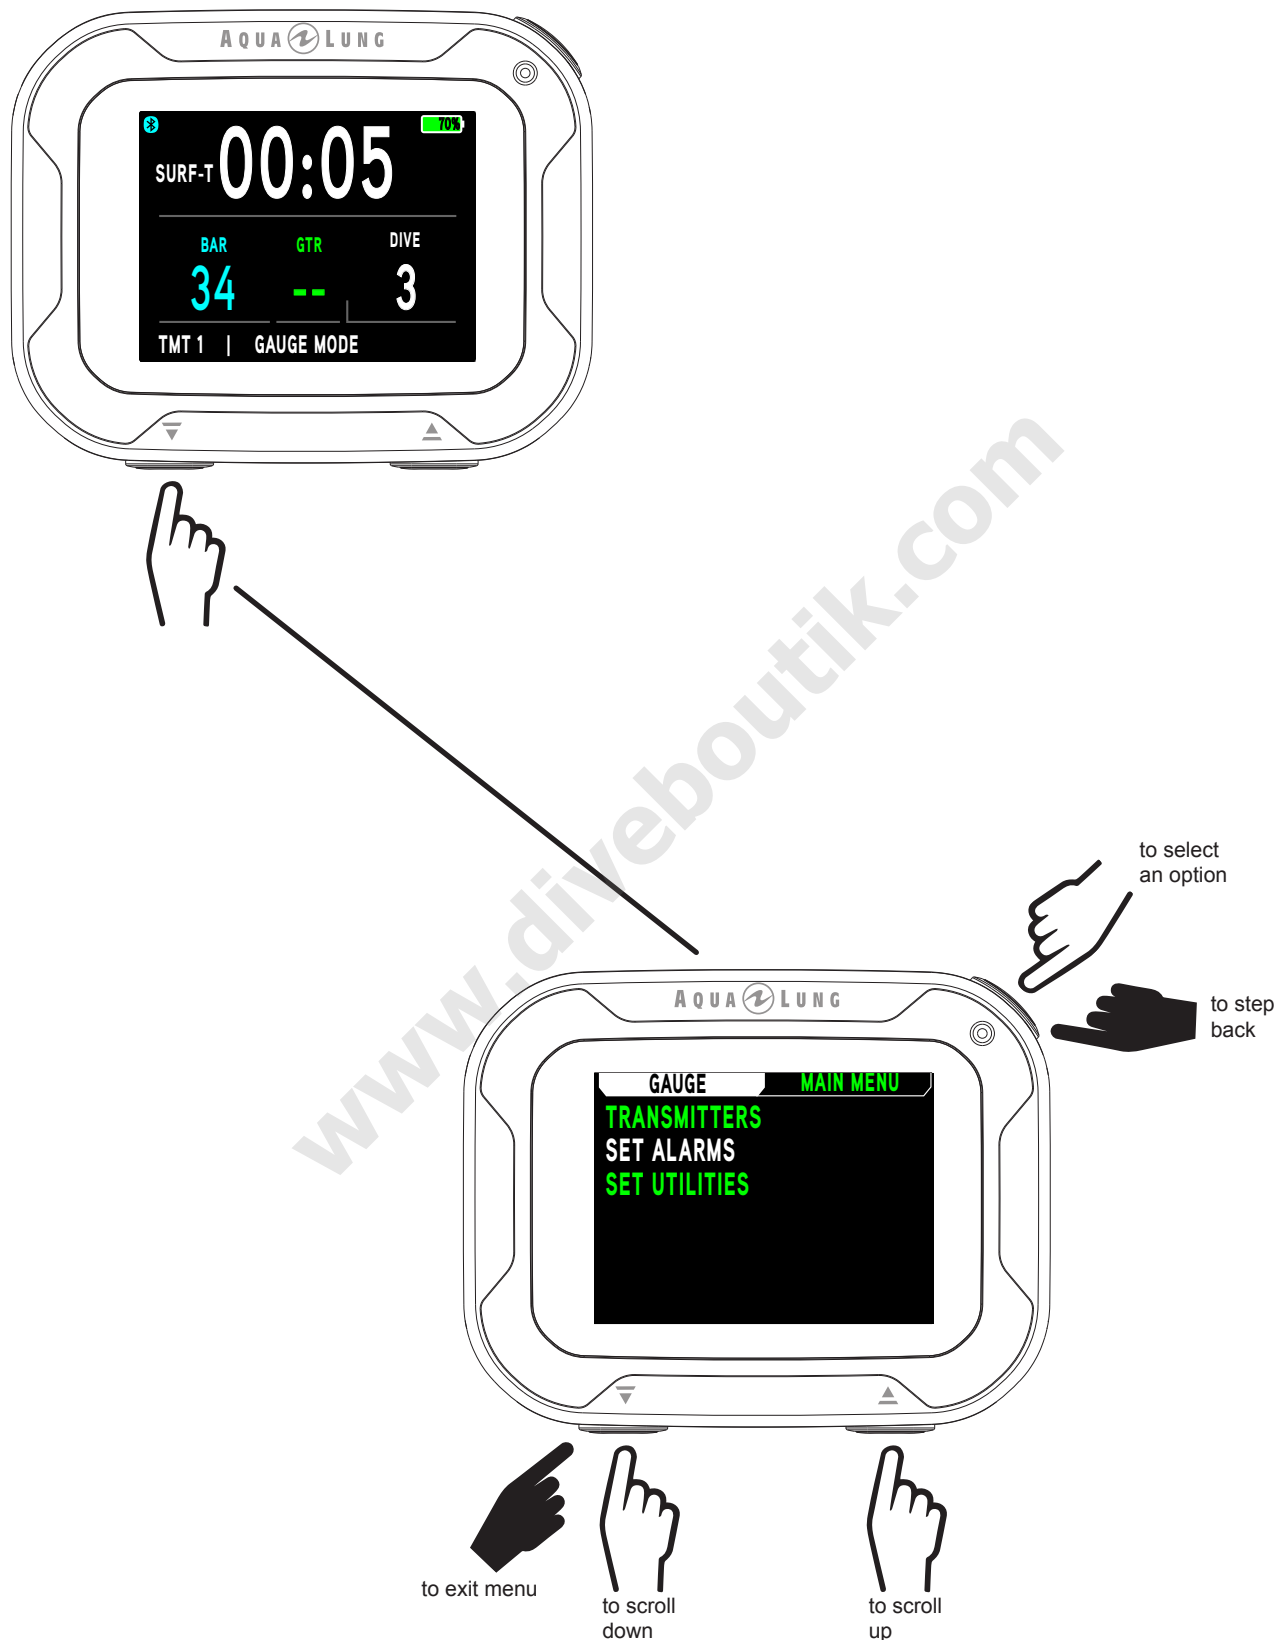

NOTE: Gauge Surface Data (alternate) screens and Menu options are similar to those described previously for Dive Mode. See the Dive Surface Mode chapter for further details.


INITIATING A DIVE

With the i770R in Gauge Mode, a dive will commence upon descending to 1.5 m (5 ft) for longer than 5 seconds. Below is a diagram to help you navigate Gauge Dive Mode functions. The dive will end and revert to Surface Mode upon ascent to 0.9 m (3 ft) of depth for at least 1 second.

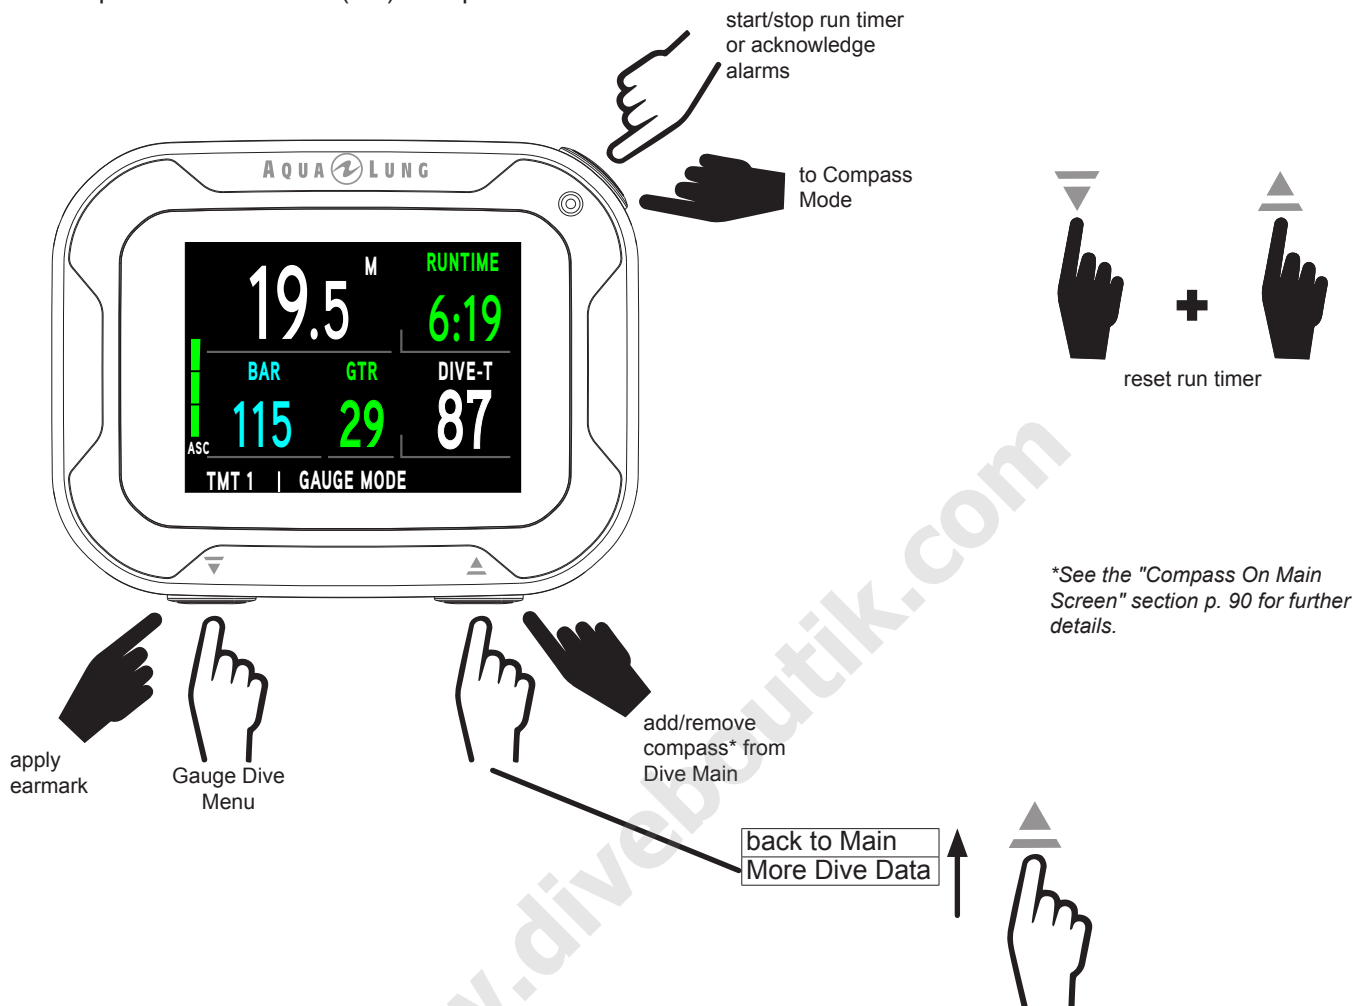

GAUGE DIVE MAIN

The Gauge Dive Main provides basic information including ascent rate, depth, run time, dive time, gas pressure, and GTR (gas time remaining).

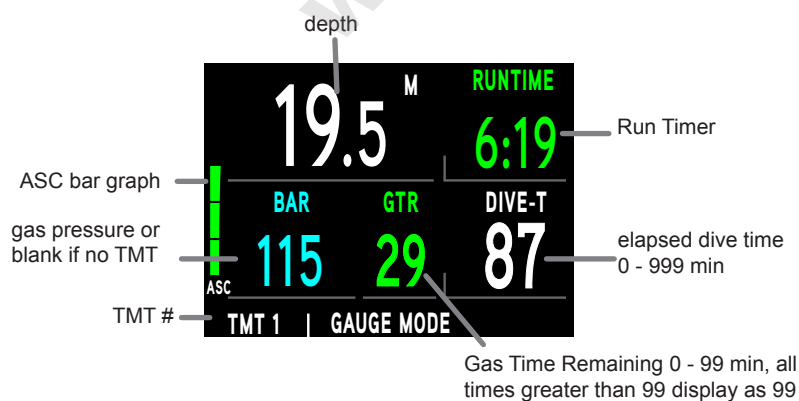


GAUGE MORE DIVE DATA

This screen simply displays additional data that is not displayed on the Dive Main screen.

GAUGE	MORE DIVE DATA
MAX DEPTH	40.2 M
DATE	7.23.17
TIME OF DAY	11:46 AM
TEMPERATURE	23 °C
ELEV	SEA


RUN TIMER

The Run Timer is started and stopped by pressing the  (Select) button. It can be reset by holding the  (Down) and  (UP) buttons together.

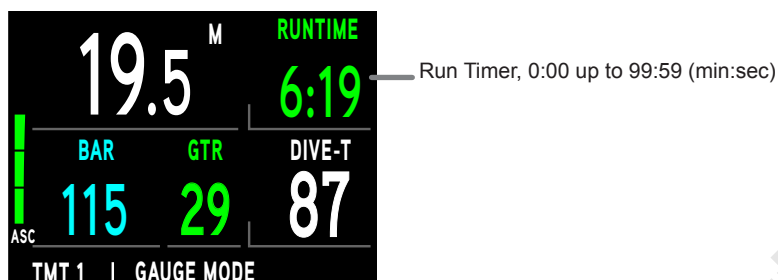

GAUGE DIVE MENU

Within the Gauge Dive Menu you can switch TMT (transmitters) or adjust the screen brightness.

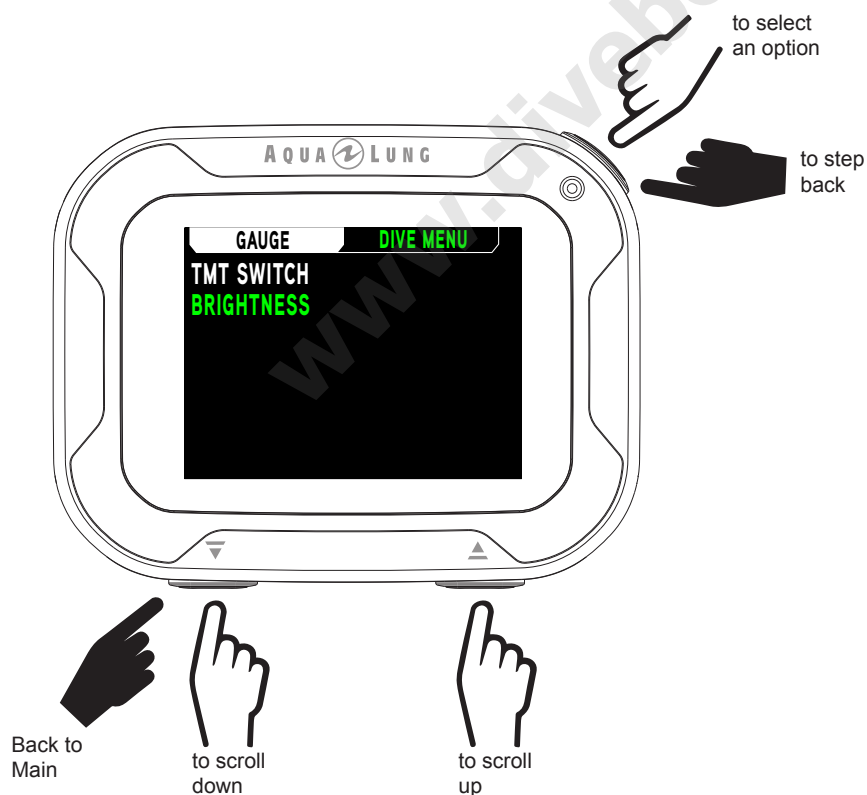


NOTE: TMT Switch and Brightness Menu options are similar to those described previously for Gas (& Transmitter) Switch in Dive Mode (p. 56) and Brightness (p. 17) settings.

DELAYED VIOLATION 3 (DV3)

If you descend deeper than the maximum functional depth*, the audible alarm will sound. At the same time, the TOO DEEP message with up arrows will flash and depth will only indicate dashes signifying that you are too deep. The max depth on the Alt screen will also be represented by dashes.

**The maximum functional depth (Dive/Gauge/Free = 100 m/330 ft) is the depth at which the i770R can properly perform all functions.*

Upon ascending above the maximum functional depth, current depth will be restored, however, max depth in the More Data screen will continue to be displayed as dashes for the remainder of that dive. The Log for that dive will also display dashes for max depth.

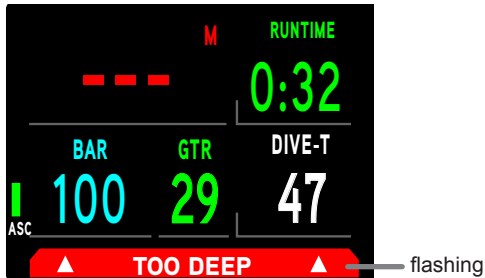

FREE MODE

www.diveboutique.com

FREE DIVE MODE DETAILS

- Although breathing apparatus is not utilized for free dive activities, nitrogen tissue loading remains a factor. Nitrogen loading is calculated based upon a fixed FO_2 of Air.
- Since a user has the option of alternating between SCUBA and free dive activities within a 24 hour period, nitrogen calculations and the displayed value of No Decompression Dive Time Remaining are carried over from one operating mode to the other, which permits the user to maintain awareness of nitrogen absorption and off-gassing status.
- The mathematical models currently used in the i770R are based on no decompression/decompression multilevel repetitive dive schedules.
- These algorithms do not take into account the physiological changes associated with the high pressures that competitive type free diving can expose a diver to.


WARNINGS:

- **Ensure that you know which operating mode is selected (DIVE, GAUGE, or FREE) prior to commencing any dive.**
- **Conducting Free dives within a 24 hour period after conducting SCUBA dives, combined with the effects of multiple rapid free dive ascents, increases your risk of decompression sickness. Such activities may result in accelerated entry into decompression which could cause serious injury or death.**
- **Combining competitive type free dive activities that involve multiple descents/ascent with activities utilizing SCUBA during the same 24 hour period is not recommended. Presently, there is no data relating to such activities.**
- **It is highly recommended that anyone planning to become involved in competitive type free dive activities obtain proper instruction and training from a recognized free diving trainer. It is imperative that the physiological affects be understood and the diver is physically prepared.**

ON THE SURFACE BEFORE A DIVE


The Free Mode Surface screen is similar to the Dive Mode screen. If the CDT (Countdown Timer) is on, it is displayed in the upper right of the screen. Dive-T (Dive Time) and M Max (or FT Max) for the previous dive is displayed during the first minute after surfacing. Otherwise, dashes are displayed for their values.

FREE SURF MAIN
(post dive)

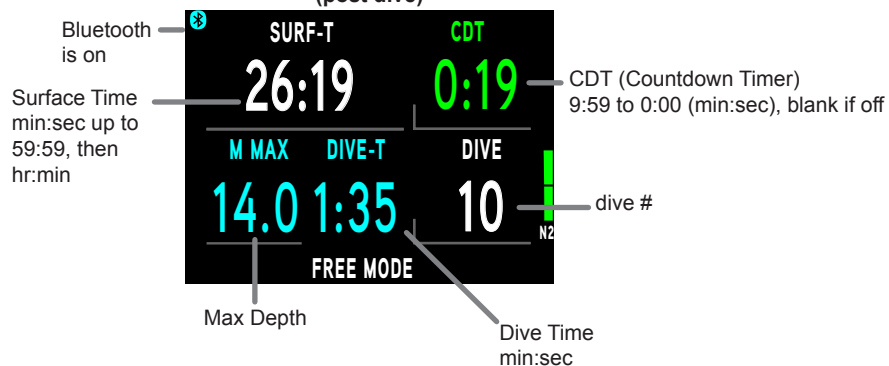

NOTE: Battery status does not display on the Free Dive Mode Surface screen unless there is a Battery Warning or Alarm. Battery status may be confirmed by returning to the Home Menu.

FREE SURF MAIN
(basic function)

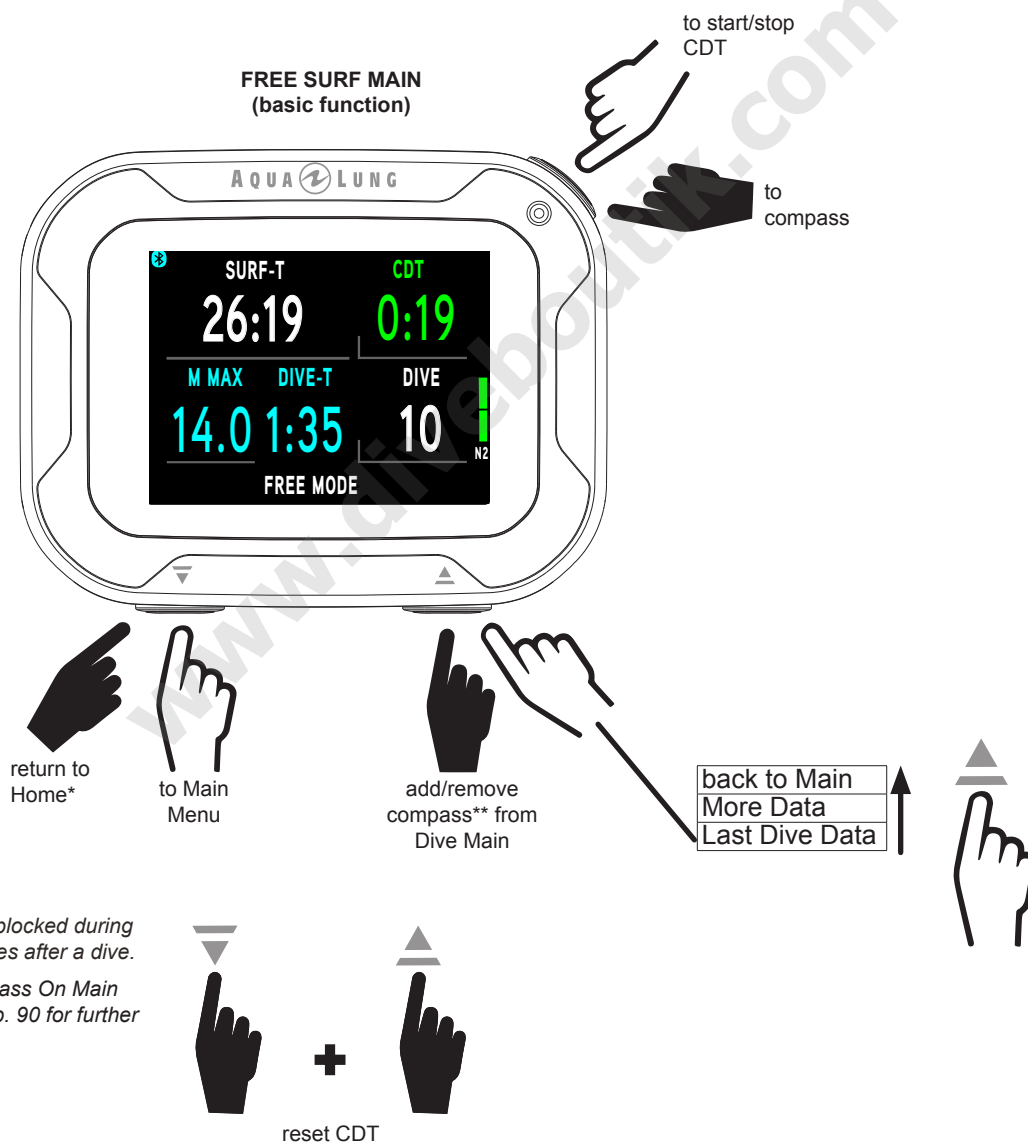


*This function is blocked during the first 10 minutes after a dive.

**See the "Compass On Main Screen" section p. 90 for further details.

NOTE: The Free Data (alternate) screens are similar to those described previously for Dive Mode. See the Dive Surface Mode chapter for further details.

FREE SURF MAIN MENU


To view and adjust i770R Free Dive settings you must navigate through the Free Main Menu. Enter the menu by pressing the ▼ (Down) button. Main Menu screens and options will be discussed in the order they appear in the menu.

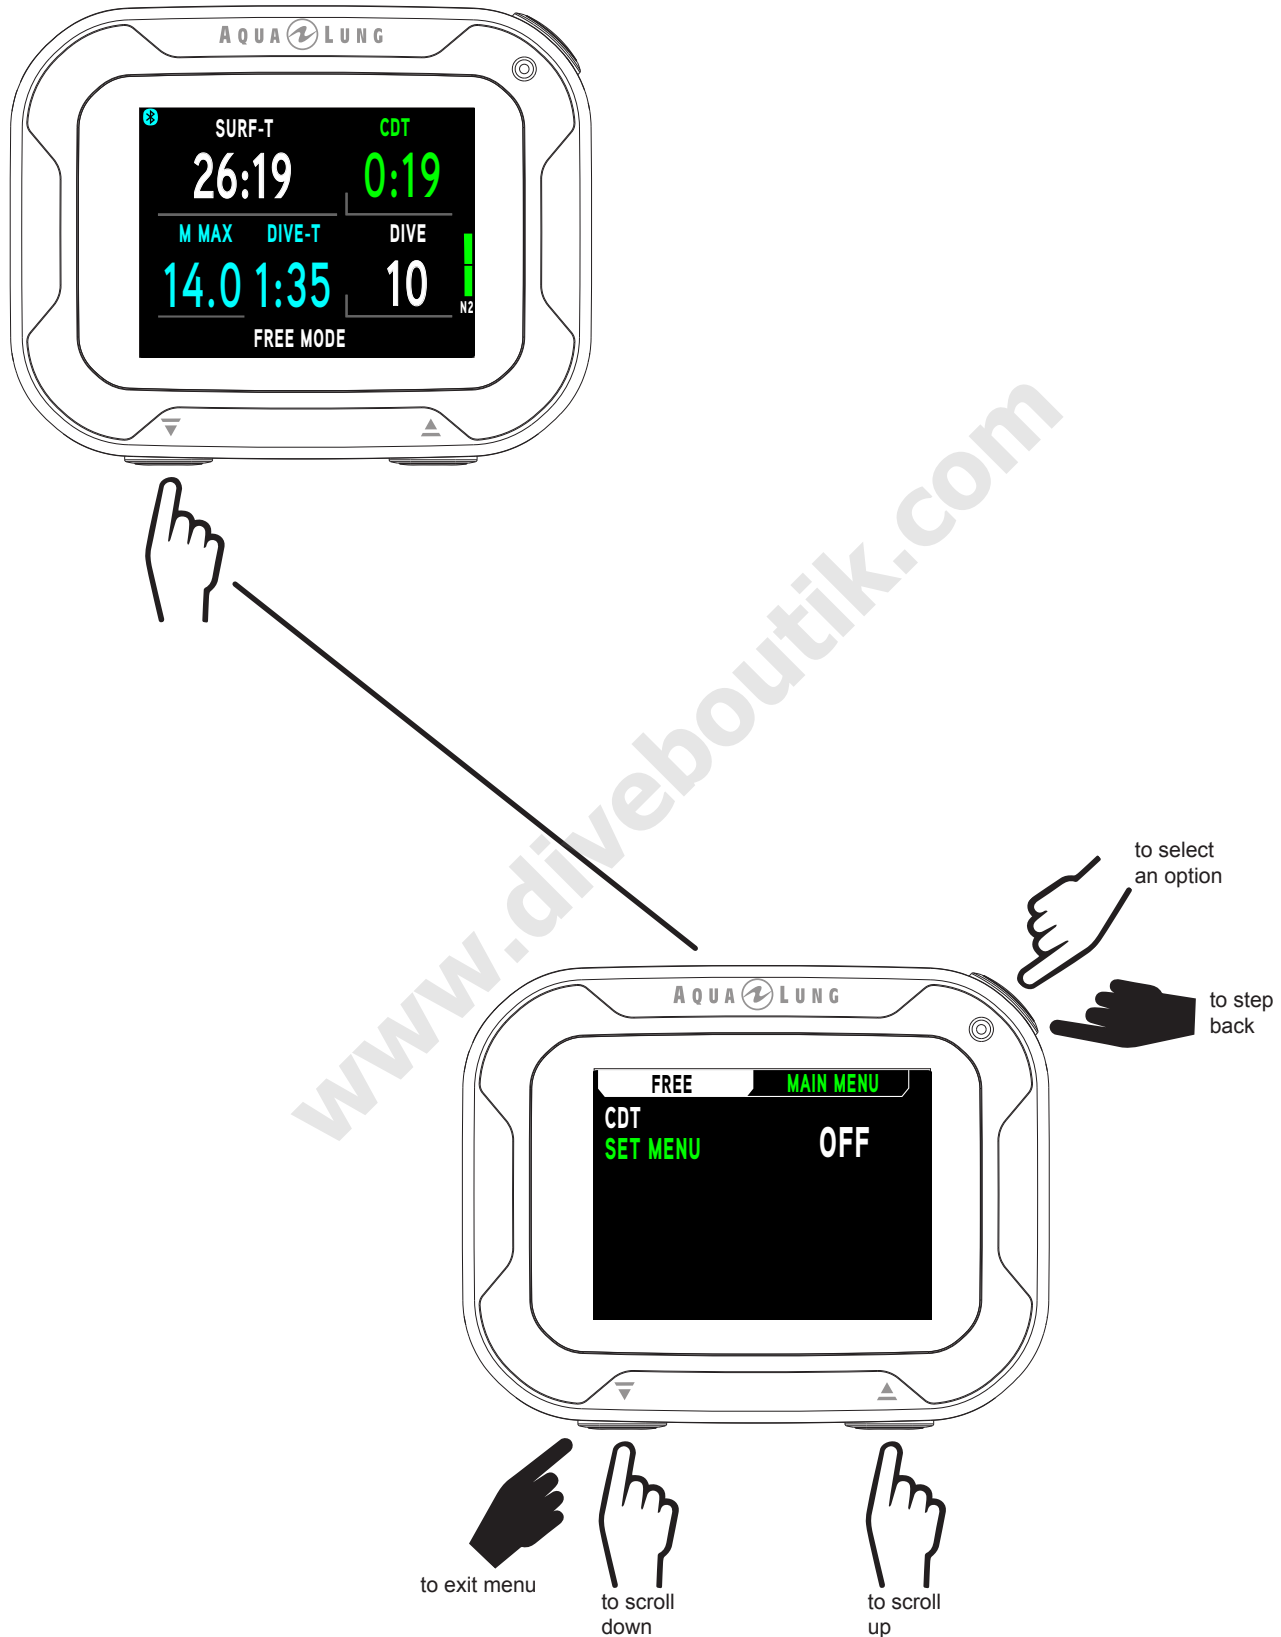

CDT (COUNTDOWN TIMER) SETUP


This screen allows you to turn the CDT ON, OFF, or to SET the CDT time from 0:01 - 9:59 (min:sec).

NOTE: Setting the CDT to on does not start the countdown. While on the Main screen, the  (Select) button is used to start and stop the timer.

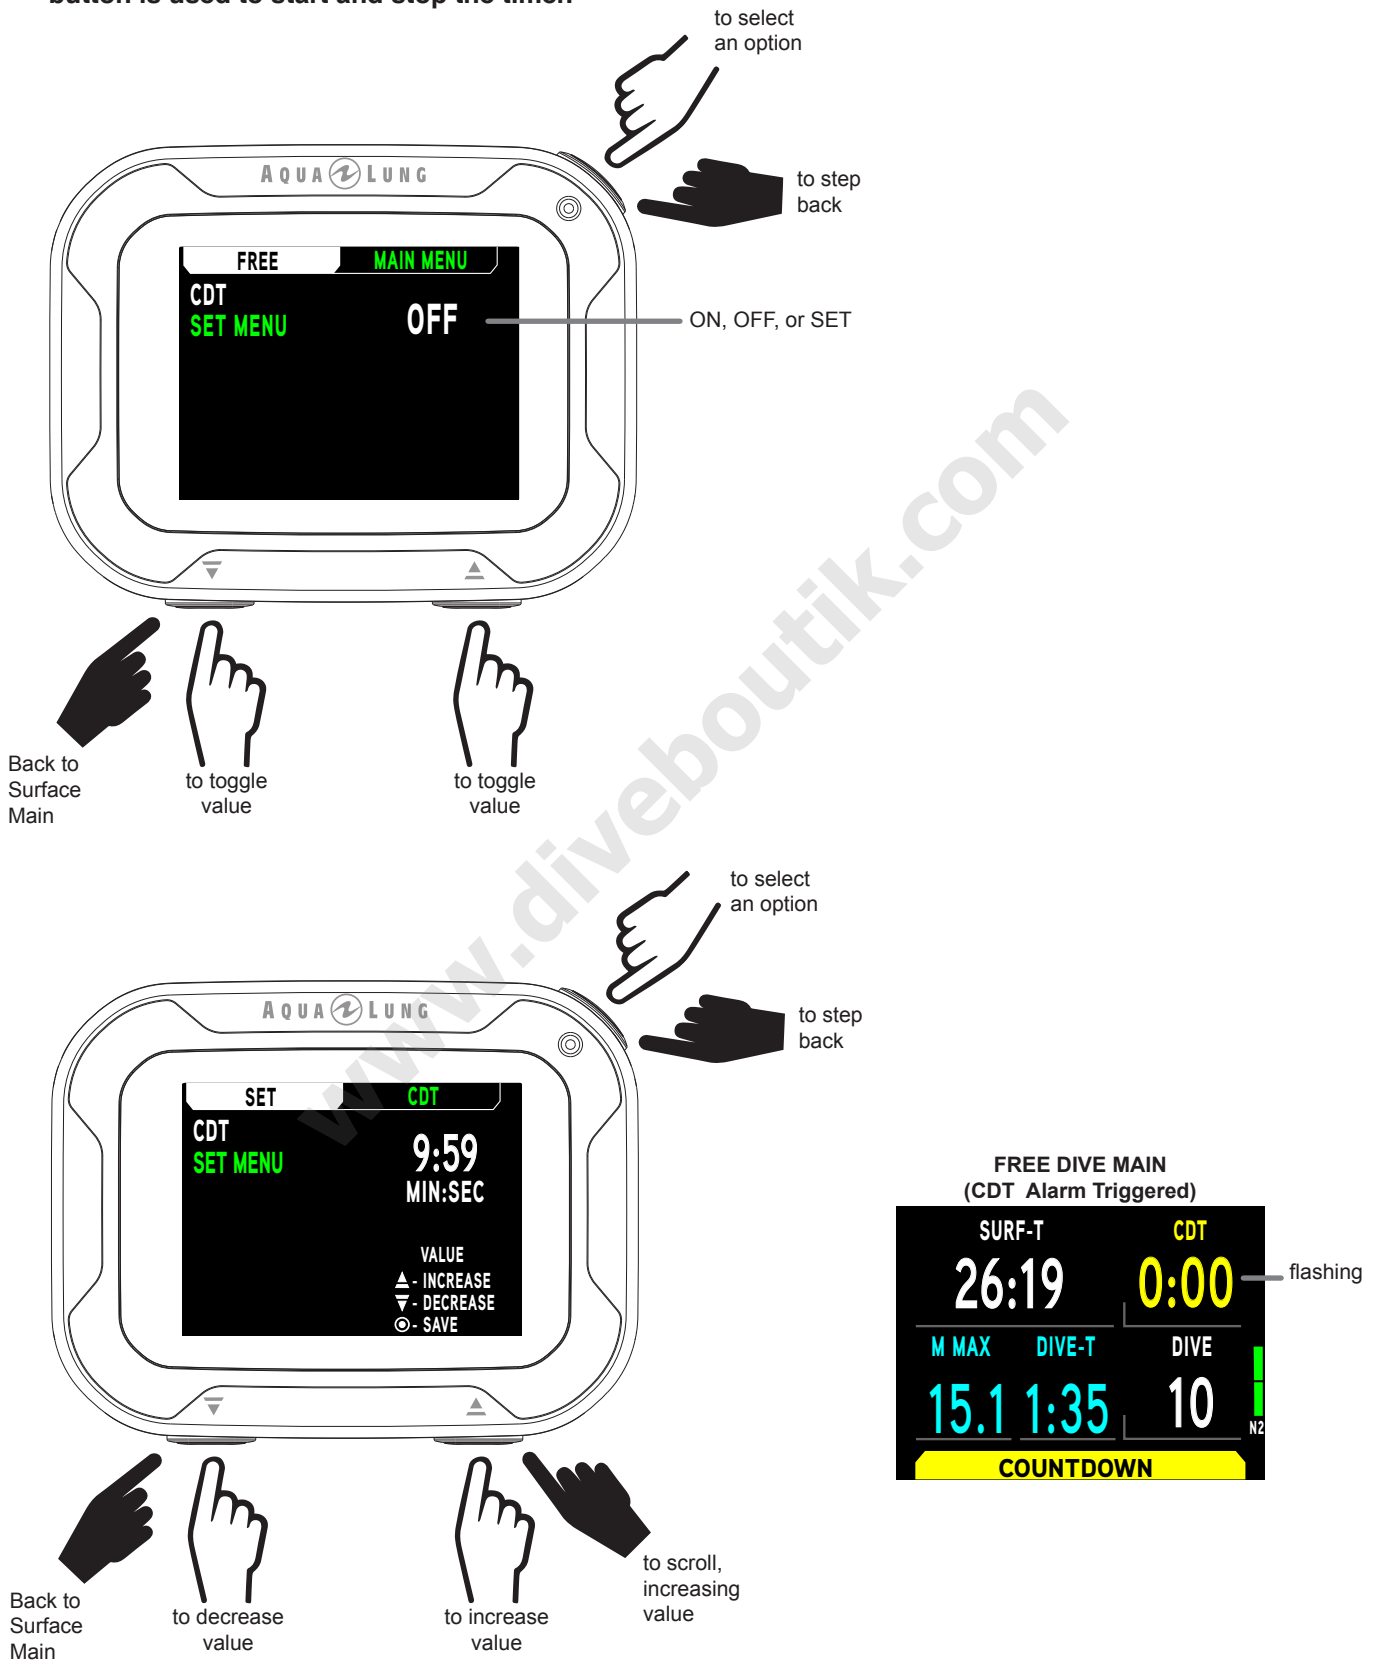


SET MENU

Within the Set Menu you can customize the following operational functions.

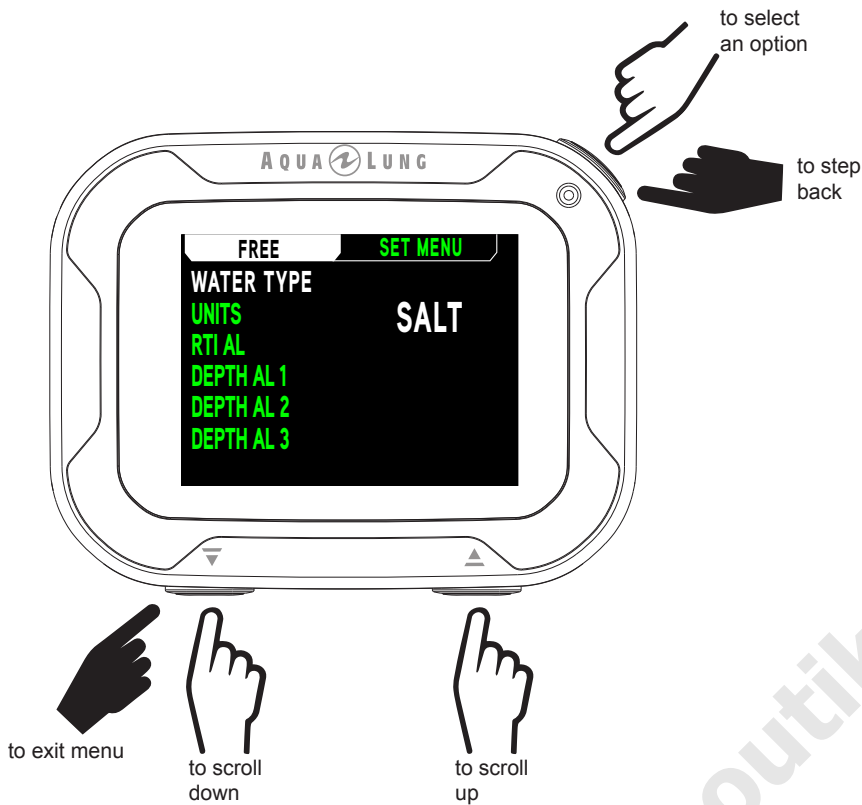


1. WATER TYPE

Water Type feature allows you to set SALT or FRESH water environment for accurate depth calculations.

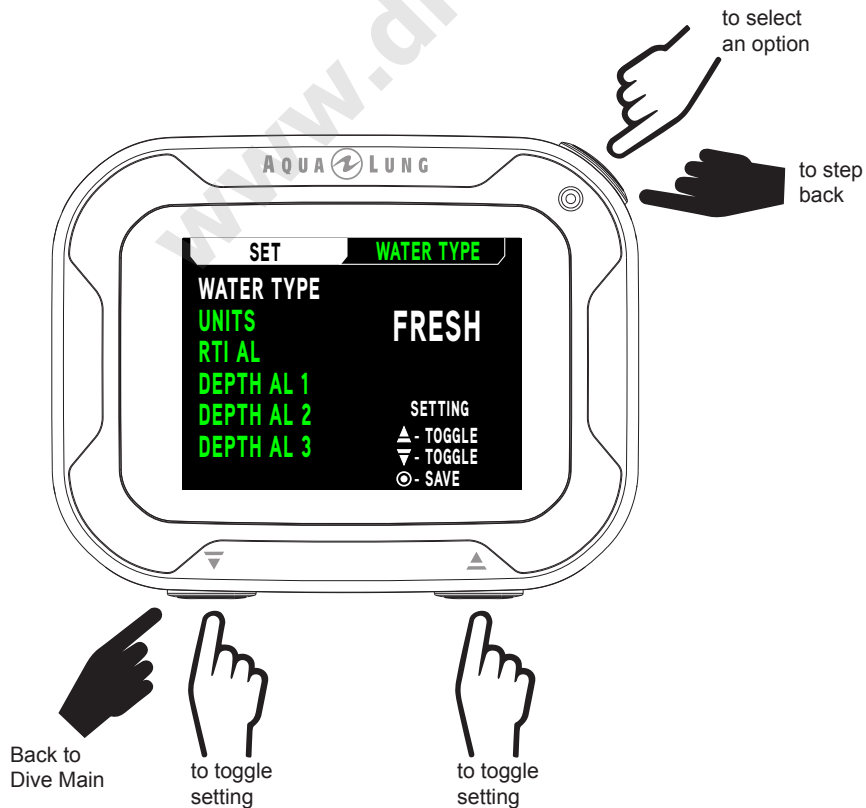


2. UNITS

The Units feature allows you to select whether Metric (M, BAR) or Imperial (FT, PSI) units of measure will be displayed.

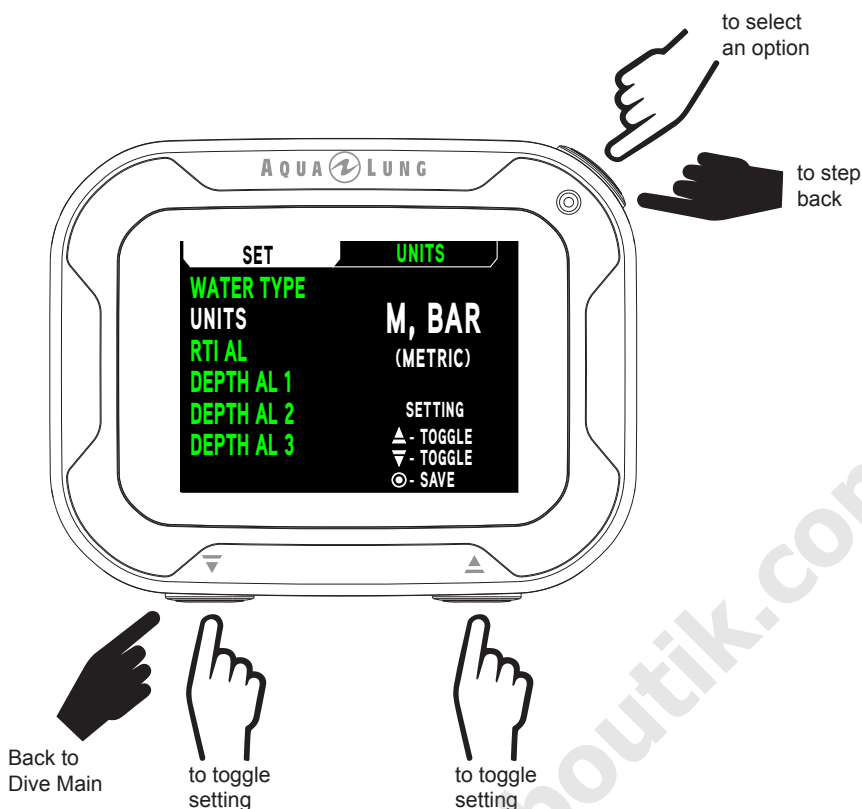

3. RTI AL (Repeating Time Interval Alarm)


The RTI Alarm allows you to set an audible alarm to go off repeatedly every 30 seconds during a dive.

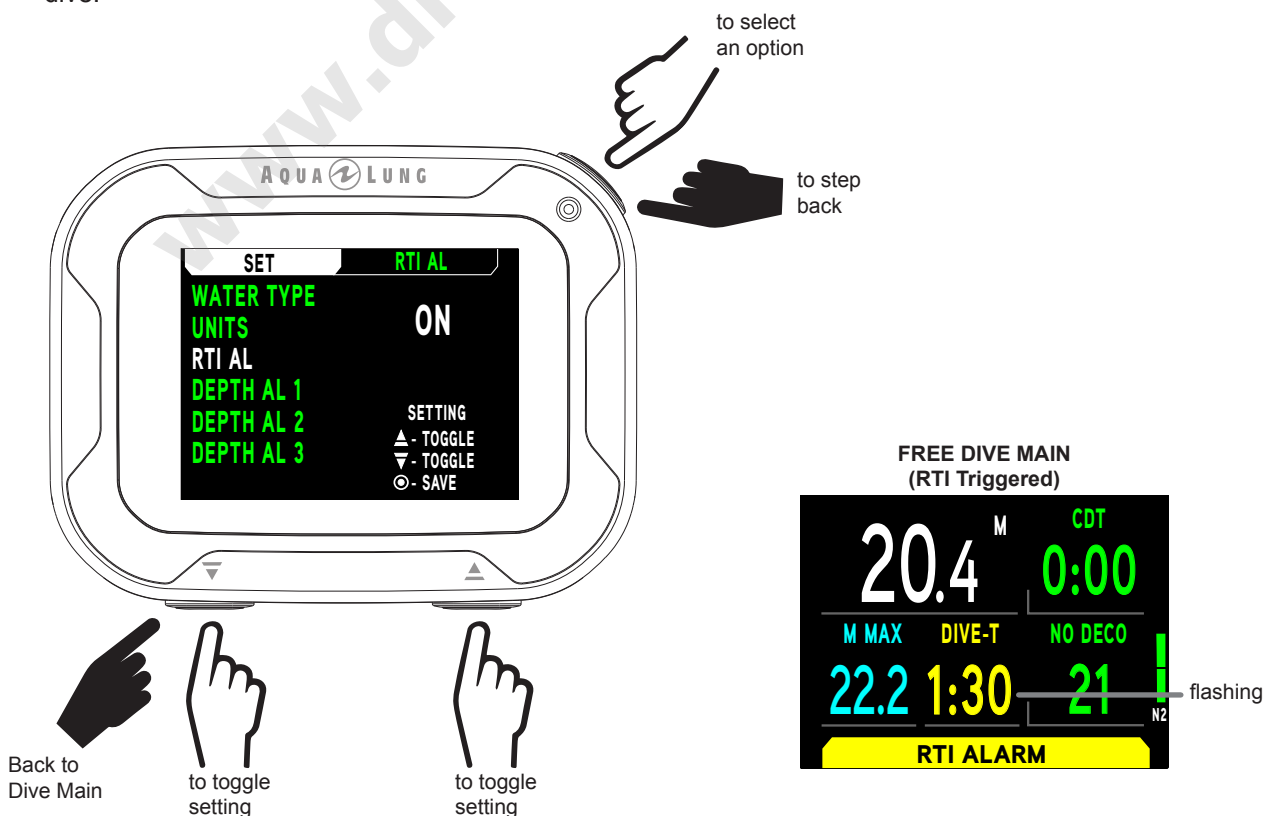

4. DEPTH AL (Alarm)

There are 3 Free Depth Alarms that can be set at progressively deeper depths, in intervals of 1 m (10 ft).


NOTE: Each successive Depth Alarm can only be set deeper than the Depth Alarm that precedes it. For example: If Depth Alarm 1 is set for 30 m then Depth Alarm 2 settings start at 31 m.

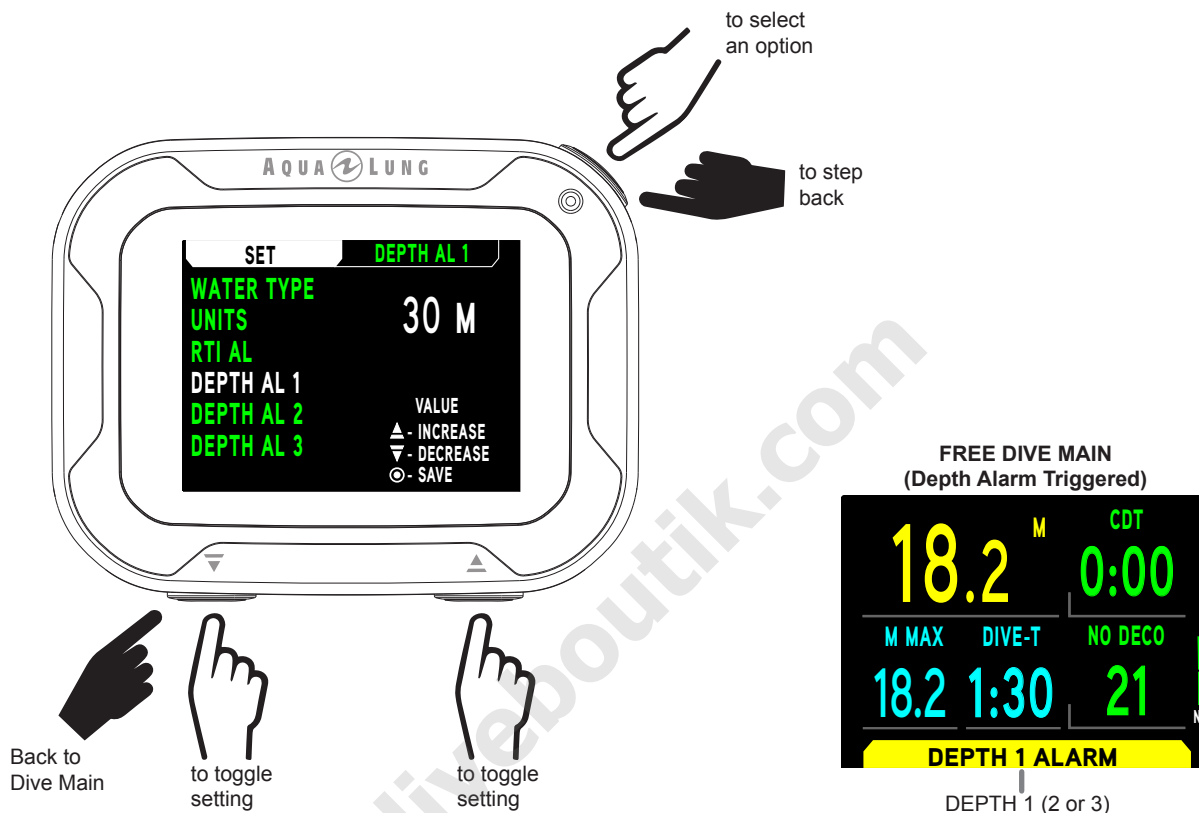

NOTE: Depth Alarm 2 and 3 are similar.


INITIATING A DIVE

With the i770R in Free Mode, a dive will commence upon descending to 1.5 m (5 ft) for longer than 5 seconds. Below is a diagram to help you navigate Free Dive Mode functions. The dive will end and revert to Surface Mode upon ascent to 0.9 m (3 ft) of depth for at least 1 second.

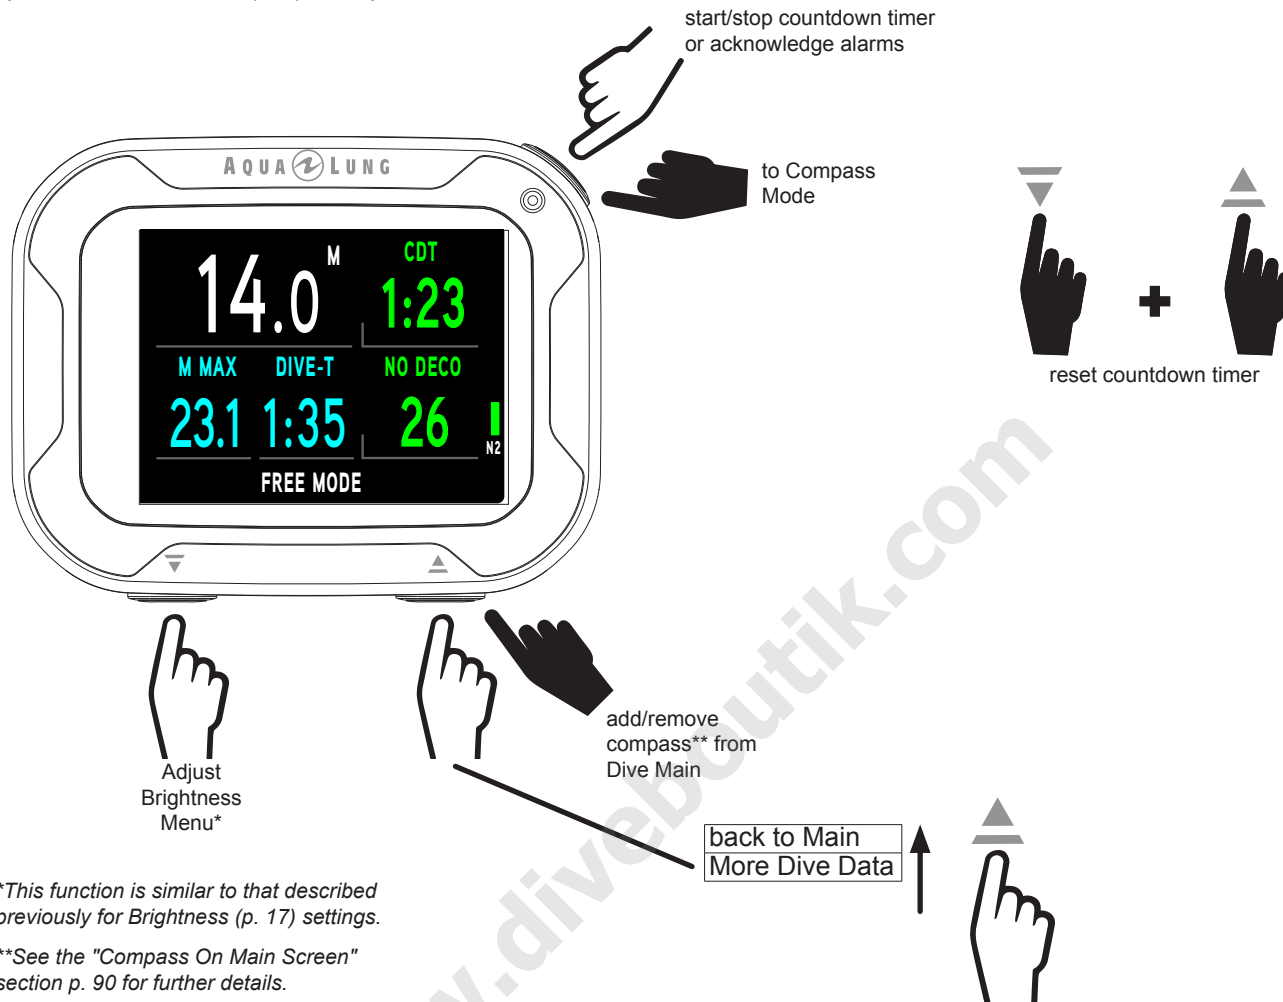


FREE DIVE MAIN

The Free Dive Main provides basic information including depth, no decompression time, Dive-T (dive time), temperature and nitrogen loading during the dive.

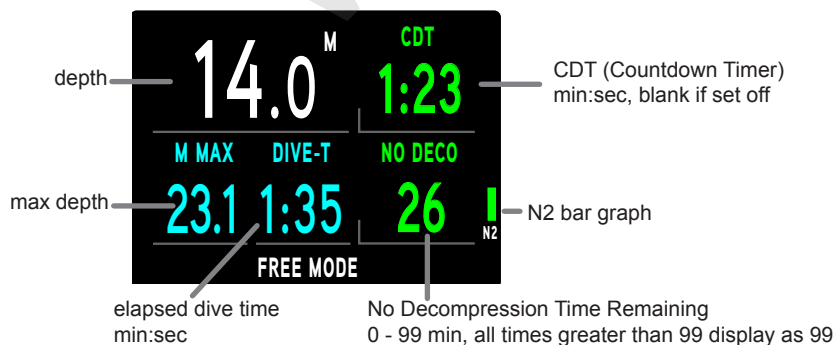


MORE DIVE DATA

This screen displays the date, current time of day, temperature, and elevation.

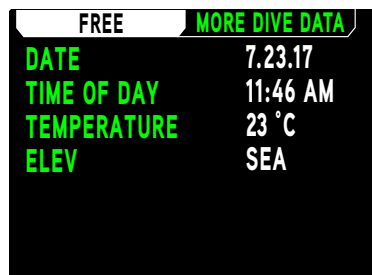

N₂ (NITROGEN) WARNING



If the nitrogen increase to the yellow (4th) segment on the N₂ Bar Graph the i770R will warn you by flashing the message NITROGEN on a yellow background during the audible alarm. When the audible warning is silenced the message NITROGEN on a yellow background will remain solid on the screen.

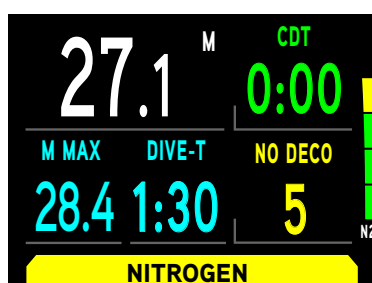

FREE VIOLATION ALARM


If nitrogen increase to the decompression level, the audible alarm will sound. Temperature, NO DECO (no decompression) and CDT (Countdown Timer) values are removed. They are replaced by the message GO UP VIOLATION with Up Arrows flashing until on the surface. At this time the N₂ Bar Graph will also flash. When the audible alarm is silenced, the N₂ Bar Graph is removed.

On the surface, the graphic GO UP and Up Arrows are removed. The graphic VIOLATION is to flash for 24 hours with Violation Gauge Mode activated to prevent further dives.

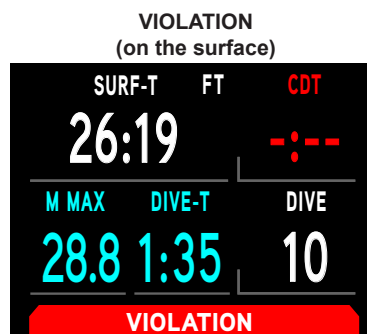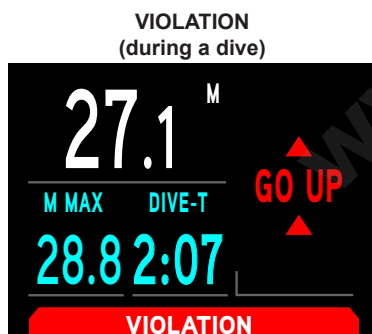


COMPASS MODE

COMPASS DISPLAY ICONS

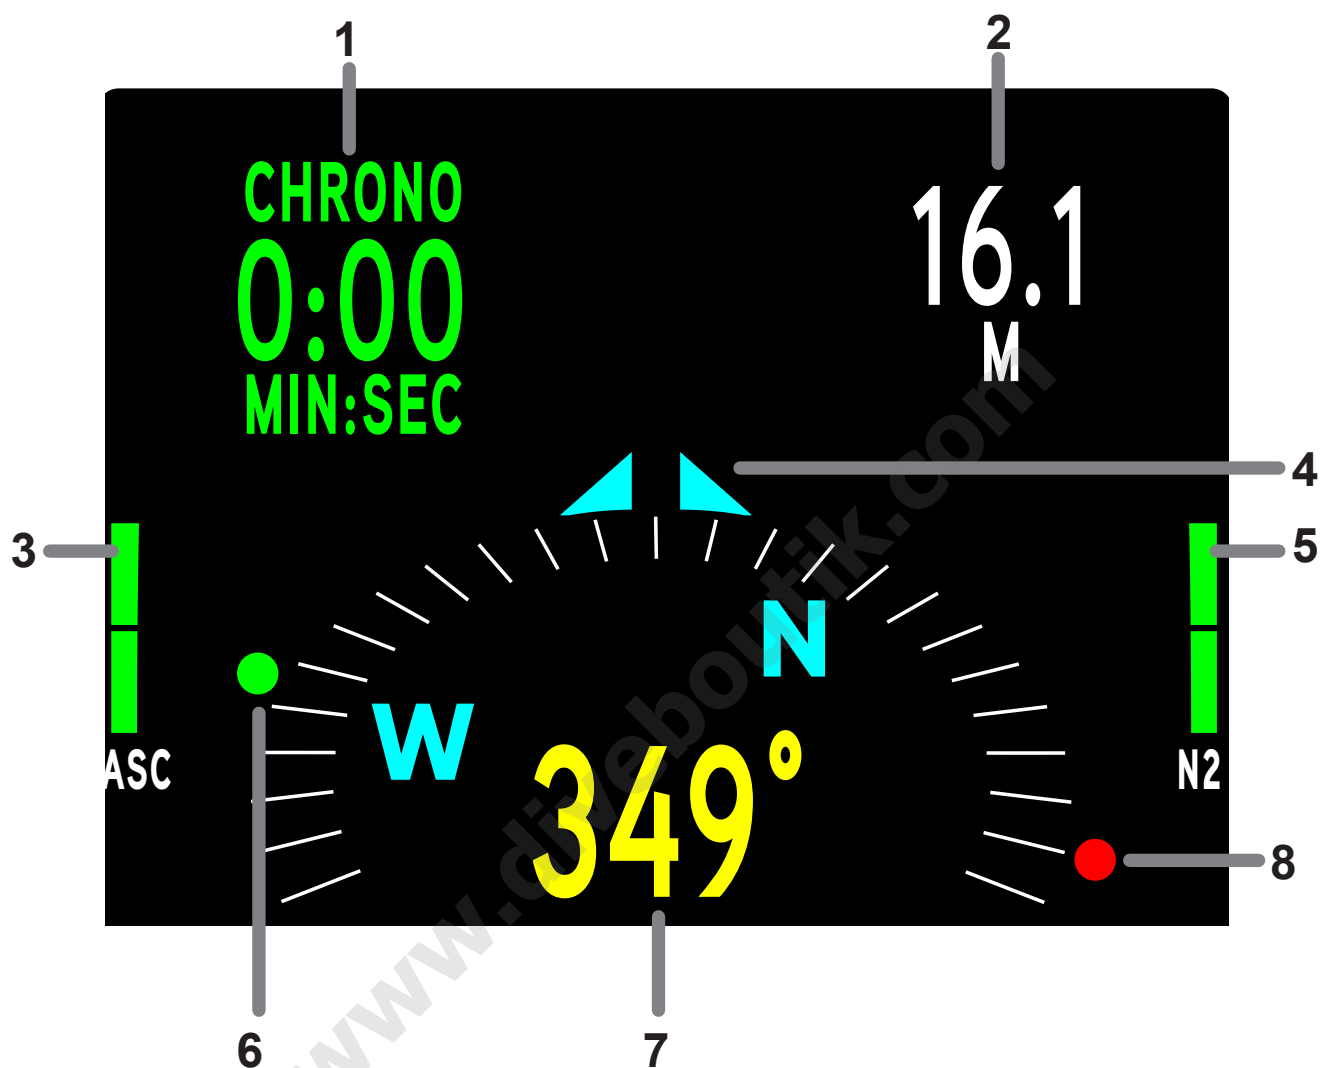



1	CHRONOGRAPH
2	DEPTH OR SURFACE TIME
3	ASCENT RATE
4	DIVER'S DIRECTION (LUBBER LINE)
5	NITROGEN LOADING
6	HEADING MARKER
7	HEADING DEGREES
8	RECIPRICAL HEADING MARKER


OVERVIEW


The i770R is equipped with an advanced 3D digital compass. Compass Mode can be activated while in Dive, Gauge, or Free operation Modes by holding the  (Select) button for at least 2 seconds.

- The i770R reverts back to the previous operation mode after 2 minutes unless the Compass Mode is reset by pressing any of the buttons.
- When no heading is set, the heading degrees remain green.
- Once a heading is set, the heading degrees are green when on heading, red when on reciprocal heading, and yellow when greater than 10 degrees off of those two headings.

 **NOTE:** Similar to an analog compass, magnetic and ferrous metals can cause erratic and erroneous readings.

 **WARNING:** You must become thoroughly familiar with setup and operation of the i770R Digital Compass before using it as your primary device for navigation. Failure to do so could result in serious errors relating to activities involving navigation.

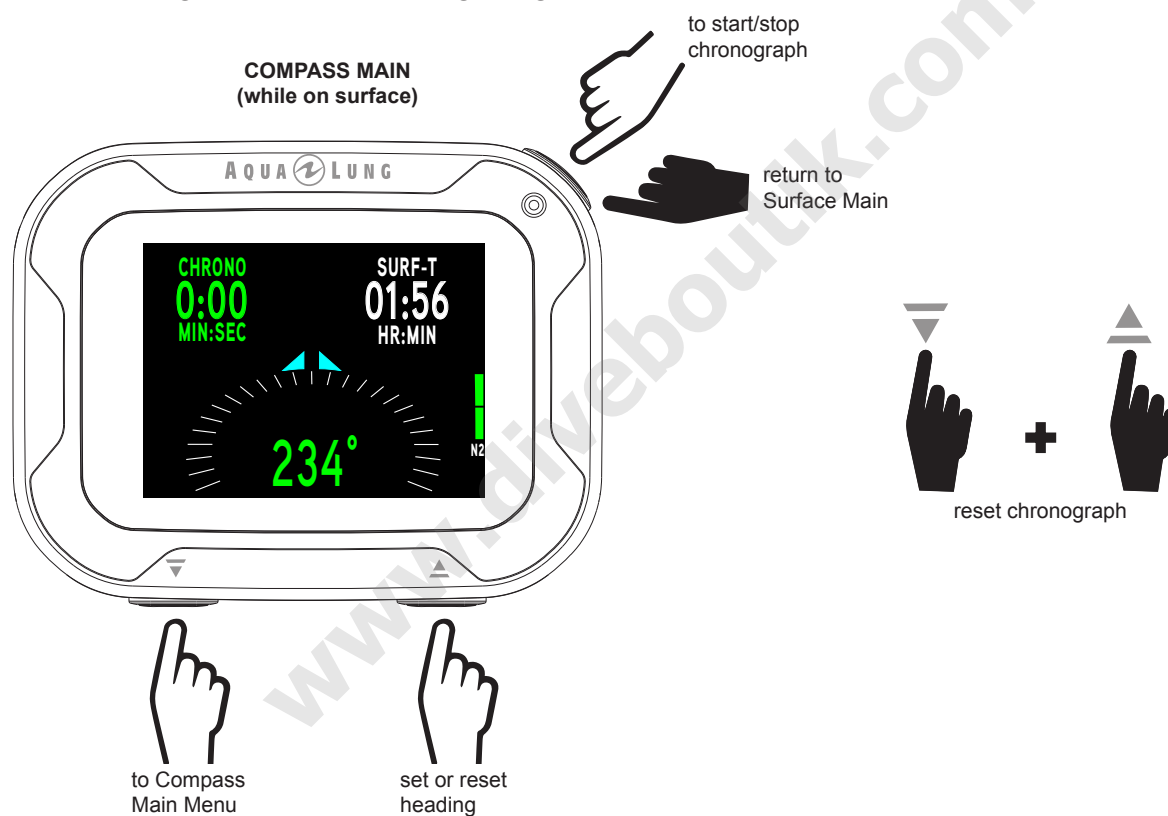


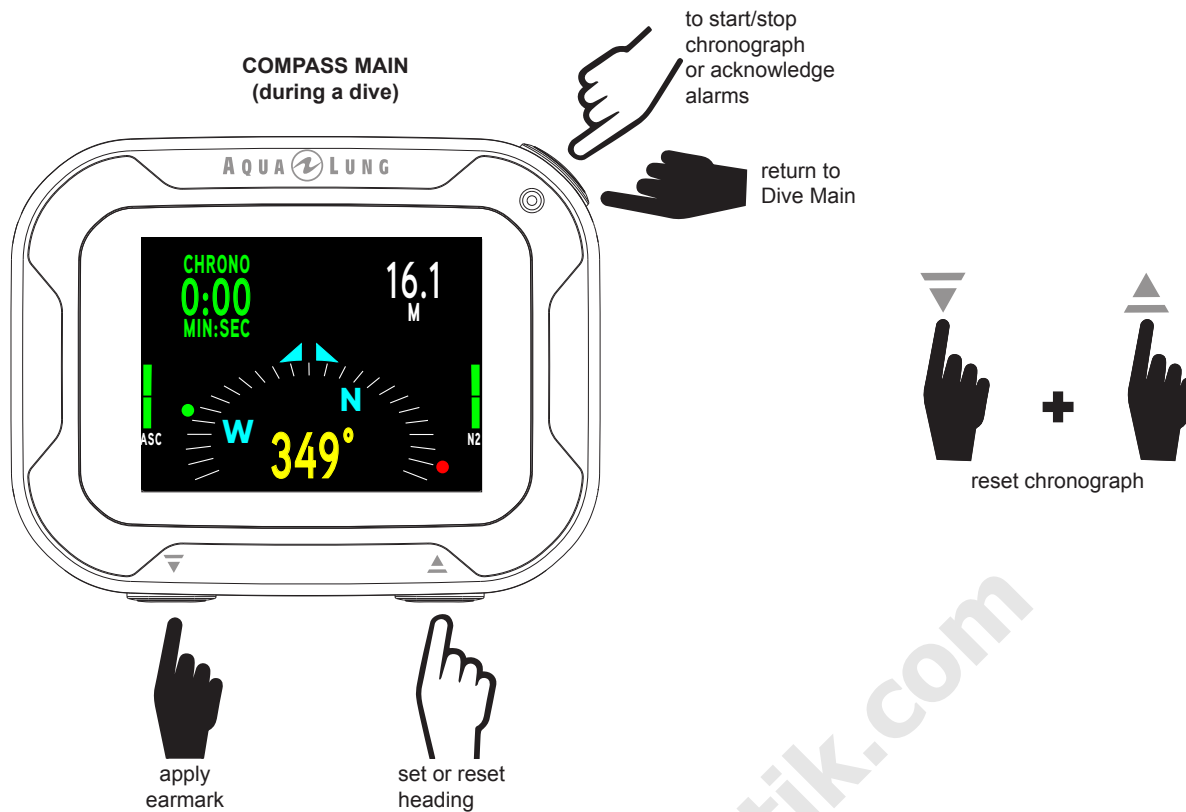

COMPASS MAIN MENU

The Main menu allows you to adjust compass accuracy.


NOTE: The Main Menu can only be accessed while on the surface. During a dive the i770R will use the last saved settings when accessing the Compass Mode.

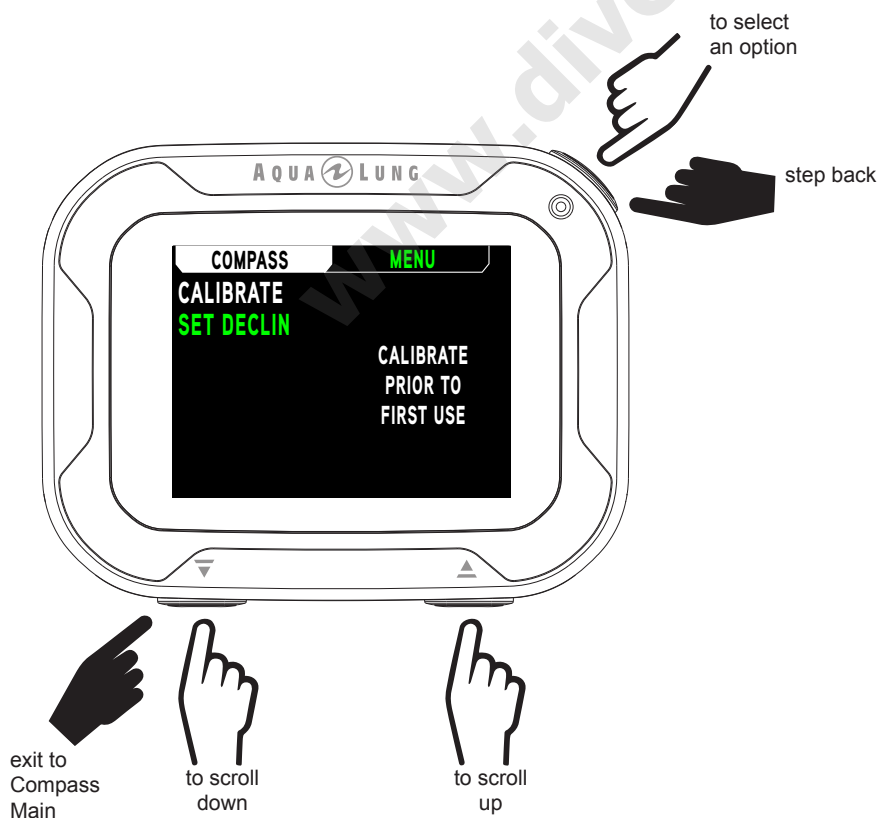

CALIBRATE


You may need to calibrate the compass from time to time to compensate for any magnetic interference (new dive location or other surrounding changes). The Calibration selection in the Compass Main Menu allows you to initiate a calibration.

To calibrate the i770R, select Calibrate from the Compass Main Menu. Then follow the onscreen prompts. Rotate and turn the i770R in as many different directions as possible until the unit beeps.

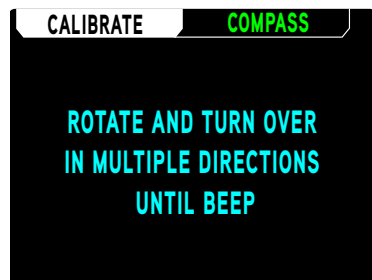

The message READY PASSED CALIBRATION or FAILED CALIBRATE AGAIN will then appear.


 **NOTE:** The i770R will return to the Compass Main Menu after 3 failed calibration attempts.

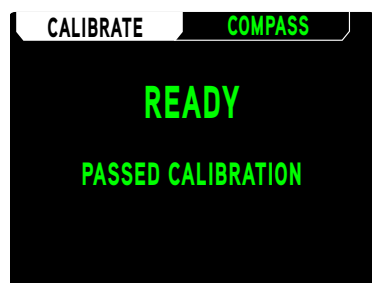

SET DECLINATION

Magnetic declination or variation measures the angle between the Earth's magnetic north and true north. The declination value for any region can be found on current geographical charts. By correcting for declination, you can achieve a more accurate compass reading.

NOTE: Magnetic north changes over time; so use only current geographical charts to obtain the declination value for any geographical region.

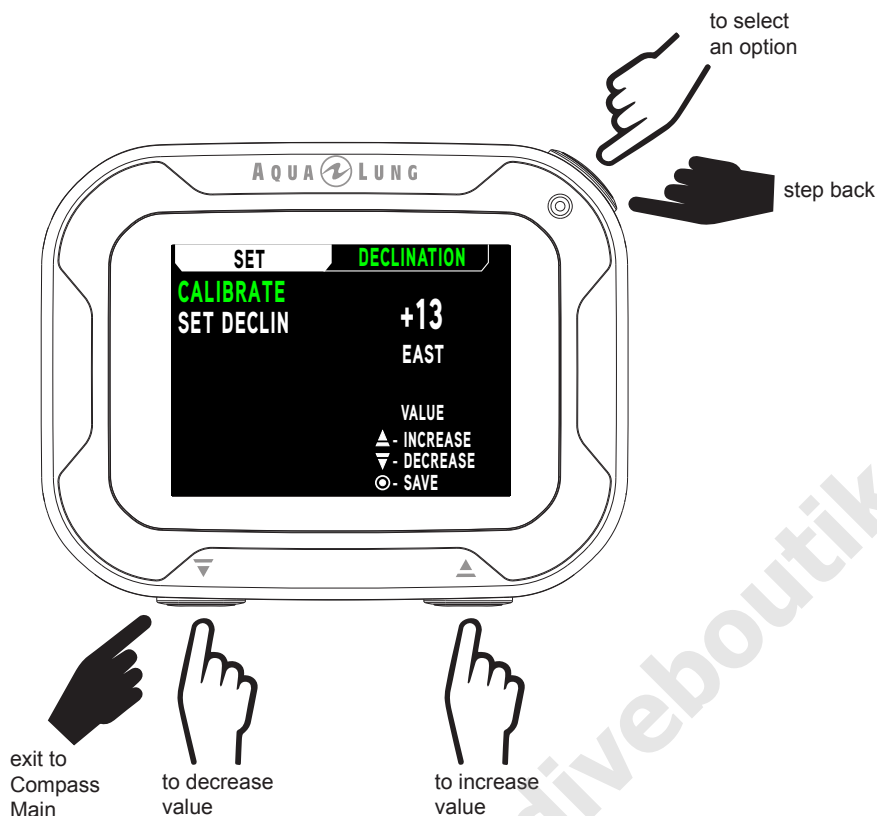

SET REFERENCE HEADING

Pressing the \triangle (UP) button while on the Compass Main screen will simultaneously set a reference heading and reciprocal heading. The message REFERENCE is confirmation of your heading being set. The reference heading is then represented by a green marker and the reciprocal heading is represented by a red marker. The heading can be reset at anytime by pressing the \triangle (UP) button again. Holding the \triangle (UP) button will remove the heading.


SET HEADING



set or reset heading

remove headings

HEADING IS SET

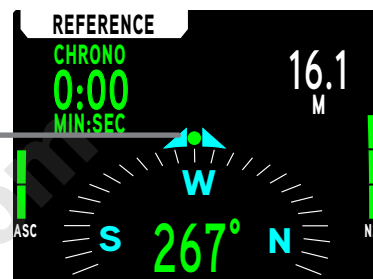

heading marker

ON HEADING
(heading set to 267°)



OFF HEADING
(heading set to 267°)



heading marker

reciprical heading marker


ON RECIPRICAL HEADING
(heading set to 259°)




EARMARK

By holding the ▼ (Down) button during a dive you can manually record a data snapshot which can later be accessed using the i770R's download feature. The message "EARMARK APPLIED" will be displayed for 3 seconds as confirmation after an earmark is made.

APPLY EARMARK

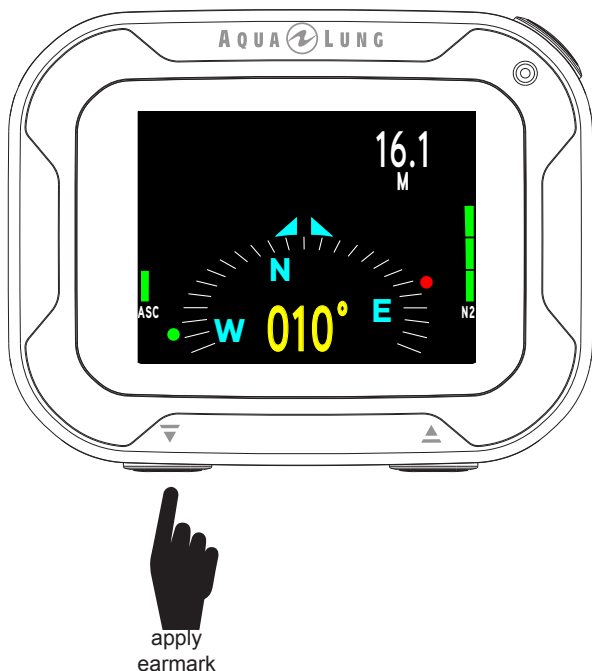

EARMARK APPLIED

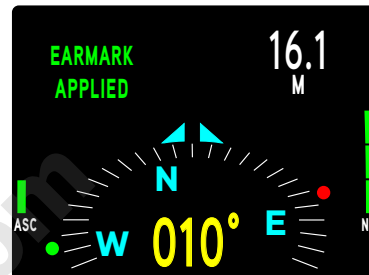

ALARMS


When alarms are triggered, operation in Compass Mode will be terminated and the Dive Main screen will be displayed describing the alarm condition. Compass Mode can then be reentered by holding Ⓢ (Select) for 2 sec after the alarm has been cleared/acknowledged.

COMPASS ON MAIN SCREEN

The compass may be added or removed from the bottom of the Dive, Gauge, or Free Mode Main screens (on the surface or during a dive) by holding the ▲ (UP) button. Holding the ▲ (UP) button again will remove the compass from the Main screen.

NOTE: Headings can be displayed on the Main screens but they must be set and/or reset in the Compass Mode. See the previous section "Set Reference Heading" on p. 89 for instruction on how to do so.

COMPASS ON DIVE MAIN (heading set to 91°)

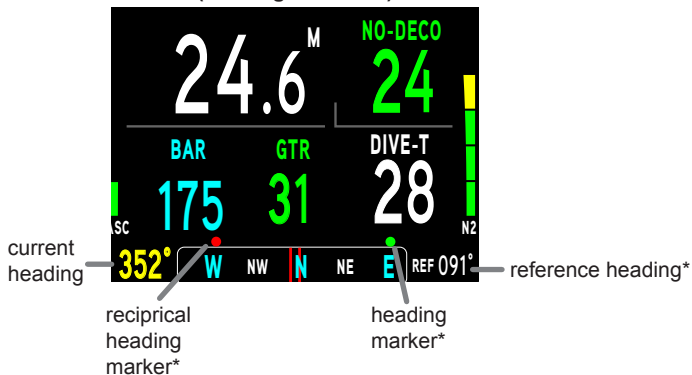

*This item is displayed only if the reference heading is set in the Compass Mode.


REFERENCE

UPLOADING/DOWNLOADING

As previously described (page 21), the i770R can be paired using the Bluetooth® feature. This requires a mobile device running Diverlog + software and equipped with Bluetooth® functionality. Follow the Diverlog + instructions on how to pair your devices and use the upload/download features.

Alternately, The i770R is configured with a 4 contact data connection port located on the side of the case. It can be used with the included USB to connect the i770R with a PC or Mac. Connect the USB cable to the i770R. When connecting the cable to the i770R, ensure that the 4 pins on the cable are properly connected to the 4 contacts on the i770R. The i770R and USB cable assembly can now be connected to a PC or Mac running Diverlog software.



NOTE: If a USB cable is connected to the i770R, Bluetooth® connection will be blocked or disabled. Though any active downloads, uploads, or firmware updates using Bluetooth® will be allowed to finish first.

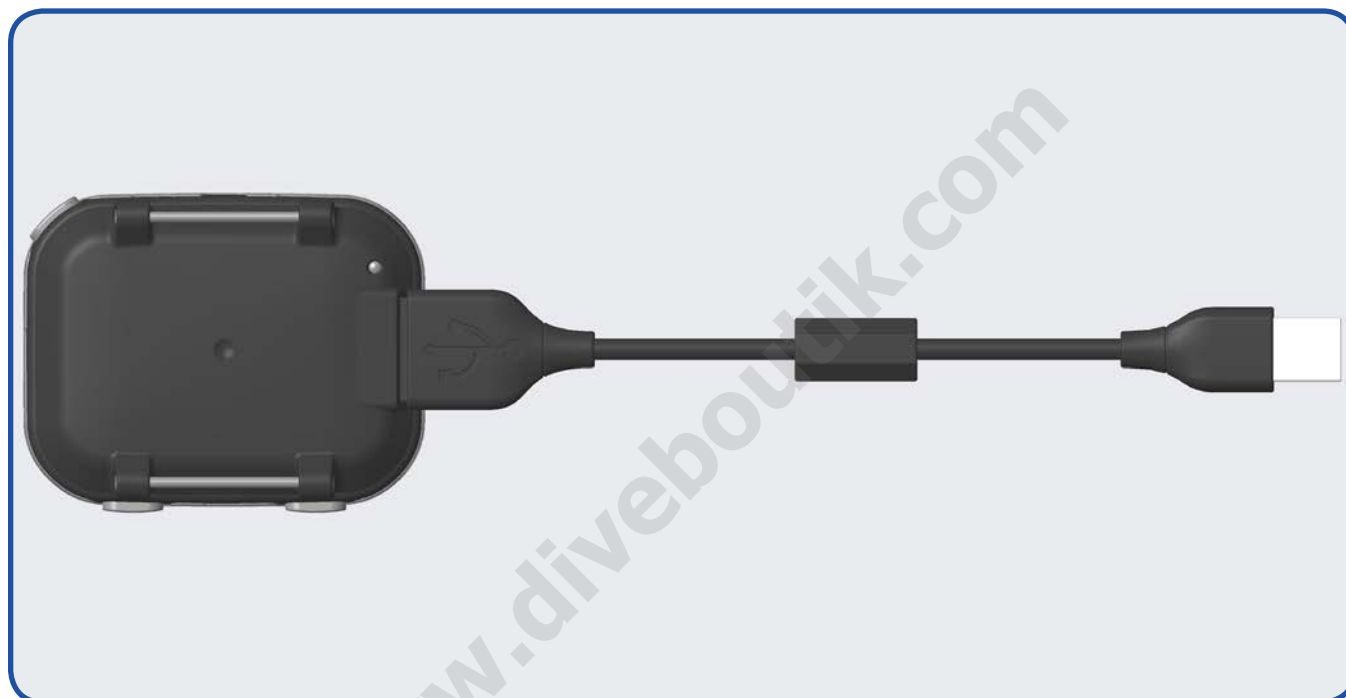

CARE AND CLEANING

Protect your i770R from shock, excessive temperatures, exposure to chemicals, and tampering. Protect the lens against scratches with lens protector. Small scratches will naturally disappear underwater.

- Soak and rinse the i770R in fresh water at the end of each day of diving, and check to ensure that the areas around the low pressure (depth) sensor, charging port, water contact, and buttons are free of debris or obstructions.
- To dissolve salt crystals, use lukewarm water or a slightly acidic bath (50% white vinegar/50% fresh water). After removal from the bath, place the i770R under gently running fresh water. Towel dry before storing.
- Keep your i770R cool, dry, and protected during transport.

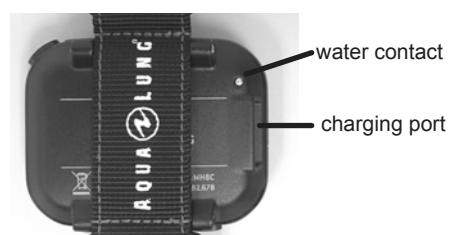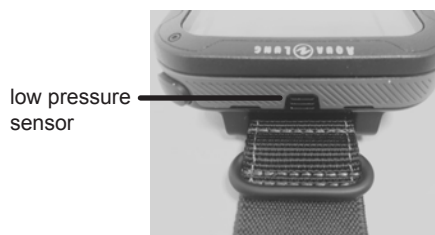

SERVICE

⚠ WARNING: At a minimum, annually check the altitude reading on the MoreData screen (p. 36) and Pre-Dive Planner (p. 49, 94) for accuracy. If your i770R is ever out of calibration (incorrect elevation reading, incorrect No Decompression Dive Times in the planner, or showing a depth reading at the surface) or displays an error code message, it must be serviced at the factory before use.

If required to return your i770R to Aqua Lung:

- Obtain an RA (Return Authorization) number by contacting <http://www.aqualung.com/us/support/contact-us> or (760) 597-5000
- Record all dive data in the Log and/or download the data stored in memory. All data will be erased during factory service.

ALTITUDE SENSING AND ADJUSTMENT

Prior to the first dive of a series of repetitive dives, Altitude (i.e., ambient pressure) is measured upon activation and every 15 minutes until a dive is made.

- While it is operating in Surface Mode after a dive, measurements are taken every 15 minutes during the 24 hour period after surfacing.
- Measurements are only taken when the unit is dry.
- Two readings are taken, the second reading 5 seconds after the first. The readings must be within 1 foot (30 cm) of each other to record that ambient pressure as the current altitude.
- No adjustments are made during any time that the water contacts are bridged.

When diving in high altitude waters from 916 to 4,270 meters (3,001 to 14,000 feet), the i770R automatically adjusts to these conditions providing corrected depth, and reduced No Decompression and O₂ Times at intervals of 305 meters (1,000 feet).

At an elevation of 916 meters (3,001 feet), Depth calibration automatically changes from feet of seawater to feet of fresh water. This is the first adjustment to the algorithm. When the Conservative Factor feature is set to ON, No Decompression Times are calculated based upon the next higher 915 meter (3,000 foot) Altitude. All adjustments for altitudes greater than 3,355 meters (11,000 feet) are then made to allowable dive times for 4,270 meters (14,000 feet). At Sea Level, calculations are based upon an altitude of 1828.8 meters (6,000 feet).

The i770R will not function as a dive computer above 4,270 meters (14,000 feet).

CHANGING THE STRAPS

Your i770R is packaged with two different strap options, nylon strap or bungee adapters.

NATO (Nylon) Strap

Installation:

Step 1. Thread the strap through the strap pins.



Step 2. Pull the strap until it stops at the seam.



Step 3. Thread the strap through the clasps.



NOTE: Double backing the strap through the clasps will provide a more secure attachment, preventing the i770R from sliding off of a wet strap when not being worn.

Removal:

Step 1. Unthread the strap at the clasps.



Step 2. Unthread the strap from the strap pins.



Bungee Adapters

Installation:

Step 1. Remove the strap pin screws using two 2 mm allen keys/drivers, as shown.



Step 2. Fit the bungee adapter to the brackets with the notch facing inward, as shown.



Step 3. Attach the bungee adapter, reusing the strap pin screws. Then repeat steps 1-3 for the other side.



CAUTION: Whenever the screws are removed and replaced, it is recommended to use medium strength (removable) threadlocker on them to prevent them loosening.

Removal:

Simply, reverse the previous steps for removal.

Bungee Strap


The Bungee adapters have multiple holes that allow for many attachment options. The recommended options are shown here.

Option 1.

One continuous loop:

- This method is easier to adjust.
- Though if the strap breaks it is possible to lose the product.

Step 1. Thread the bungee.

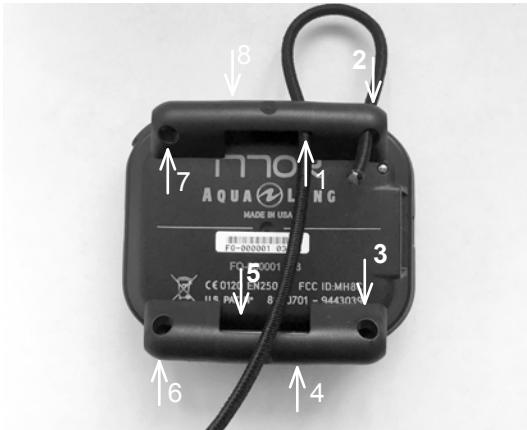

Step 2. Tie the ends together.



Step 3. Make adjustments and trim the bungee as needed.



Option 2.

Two individual loops:

- This option can provide added security against product loss due to a single broken strap.
- Though it requires two separate adjustments.

Step 1. Thread the bungee and tie the ends on one side then repeat for the other side.



Step 2. Make adjustments and trim the bungee as needed.



TECHNICAL DATA

NO DECOMPRESSION TIME LIMITS

Z+ ALGORITHM >> NDLS (HR:MIN) AT ALTITUDE (METRIC)

Altitude (meters)	0 to 915	916 to 1220	1221 to 1525	1526 to 1830	1831 to 2135	2136 to 2440	2441 to 2745	2746 to 3050	3051 to 3355	3356 to 3660	3661 to 3965	3966 to 4270
Depth (M)												
9	3:37	2:41	2:31	2:23	2:16	2:10	2:04	1:59	1:54	1:50	1:43	1:37
12	1:55	1:27	1:21	1:15	1:12	1:08	1:05	1:03	1:00	0:58	0:55	0:54
15	1:08	0:55	0:53	0:51	0:49	0:47	0:44	0:42	0:39	0:37	0:36	0:34
18	0:50	0:39	0:37	0:35	0:33	0:32	0:30	0:28	0:26	0:24	0:23	0:22
21	0:36	0:28	0:26	0:24	0:23	0:21	0:20	0:19	0:18	0:17	0:16	0:16
24	0:27	0:20	0:19	0:18	0:17	0:16	0:15	0:14	0:13	0:12	0:11	0:11
27	0:20	0:16	0:15	0:13	0:12	0:11	0:11	0:10	0:09	0:09	0:09	0:08
30	0:16	0:12	0:11	0:10	0:09	0:09	0:09	0:08	0:08	0:07	0:07	0:07
33	0:13	0:09	0:09	0:08	0:08	0:07	0:07	0:07	0:07	0:06	0:06	0:06
36	0:10	0:08	0:07	0:07	0:07	0:06	0:06	0:06	0:05	0:05	0:05	0:05
39	0:09	0:07	0:06	0:06	0:06	0:06	0:05	0:05	0:05	0:05	0:05	0:04
42	0:08	0:06	0:06	0:05	0:05	0:05	0:05	0:05	0:04	0:04	0:04	0:04
45	0:06	0:05	0:05	0:05	0:05	0:04	0:04	0:04	0:04	0:04	0:04	0:04
48	0:06	0:05	0:05	0:04	0:04	0:04	0:04	0:04	0:04	0:03	0:03	0:03
51	0:05	0:04	0:04	0:04	0:04	0:04	0:04	0:03	0:03	0:03	0:03	0:03
54	0:05	0:04	0:04	0:04	0:04	0:03	0:03	0:03	0:03	0:03	0:03	0:03
57	0:05	0:04	0:04	0:03	0:03	0:03	0:03	0:03	0:03	0:03	0:03	0:03

Z+ ALGORITHM >> NDLS (HR:MIN) AT ALTITUDE (IMPERIAL)

Altitude (feet)	0 to 3000	3001 to 4000	4001 to 5000	5001 to 6000	6001 to 7000	7001 to 8000	8001 to 9000	9001 to 10000	10001 to 11000	11001 to 12000	12001 to 13000	13001 to 14000
Depth (FT)												
30	3:17	2:30	2:21	2:14	2:08	2:02	1:57	1:52	1:47	1:39	1:34	1:29
40	1:49	1:21	1:15	1:11	1:08	1:05	1:02	1:00	0:57	0:55	0:53	0:51
50	1:05	0:53	0:51	0:49	0:47	0:44	0:42	0:39	0:37	0:35	0:34	0:33
60	0:48	0:37	0:35	0:33	0:32	0:30	0:28	0:26	0:24	0:23	0:22	0:21
70	0:35	0:26	0:24	0:23	0:21	0:20	0:19	0:18	0:17	0:16	0:16	0:14
80	0:26	0:19	0:18	0:17	0:16	0:15	0:14	0:13	0:12	0:11	0:11	0:10
90	0:19	0:15	0:14	0:13	0:12	0:11	0:10	0:10	0:09	0:09	0:08	0:08
100	0:16	0:11	0:10	0:10	0:09	0:09	0:08	0:08	0:07	0:07	0:07	0:07
110	0:12	0:09	0:08	0:08	0:08	0:07	0:07	0:07	0:06	0:06	0:06	0:05
120	0:10	0:08	0:07	0:07	0:07	0:06	0:06	0:06	0:05	0:05	0:05	0:05
130	0:08	0:07	0:06	0:06	0:06	0:05	0:05	0:05	0:05	0:05	0:04	0:04
140	0:07	0:06	0:05	0:05	0:05	0:05	0:05	0:04	0:04	0:04	0:04	0:04
150	0:06	0:05	0:05	0:05	0:05	0:04	0:04	0:04	0:04	0:04	0:04	0:03
160	0:06	0:05	0:05	0:04	0:04	0:04	0:04	0:04	0:04	0:03	0:03	0:03
170	0:05	0:04	0:04	0:04	0:04	0:04	0:03	0:03	0:03	0:03	0:03	0:03
180	0:05	0:04	0:04	0:04	0:03	0:03	0:03	0:03	0:03	0:03	0:03	0:03
190	0:04	0:04	0:04	0:03	0:03	0:03	0:03	0:03	0:03	0:03	0:03	0:00

NOTE: The i770R graphical format displays a maximum of 99 minutes of No Decompression time. Times greater than 99 minutes display as 99 on the i770R screen. The above figures in the above chart are actual no decompression time values the i770R uses for calculations.

ALTITUDE LEVELS

DISPLAY	RANGE: FEET (METERS)
SEA	0 to 3,000 (915)
EL2	3,001 to 5,000 (916 to 1,525)
EL3	5,001 to 7,000 (1,526 to 2,135)
EL4	7,001 to 9,000 (2,136 to 2,745)
EL5	9,001 to 11,000 (2,746 to 3,355)
EL6	11,001 to 13,000 (3,356 to 3,965)
EL7	> 13,000 (3,965)

OXYGEN EXPOSURE LIMITS

(from NOAA Diving Manual)

PO ₂ (ATA)	MAX DURATION SINGLE EXPOSURE (MIN)	MAX TOTAL DURATION 24 HOUR DAY (MIN)
0.60	720	720
0.70	570	570
0.80	450	450
0.90	360	360
1.00	300	300
1.10	240	270
1.20	210	240
1.30	180	210
1.40	150	180
1.50	120	180
1.60	45	150

SPECIFICATIONS

CAN BE USED AS

- Dive Computer (Air or Nitrox)
- Digital Depth Gauge/Timer
- Free Dive Computer

DIVE COMPUTER PERFORMANCE

- Bühlmann ZHL-16C based Z+ algorithm
- Decompression in agreement with Bühlmann ZHL-16C
- No Decompression Deep Stops - Morroni, Bennett
- Decompression Deep Stops (not recommended) - Blatteau, Gerth, Gutvik
- Altitude - Bühlmann, IANTD, RDP (Cross)
- Altitude corrections and O₂ limits based on NOAA tables

OPERATIONAL PERFORMANCE

- | | |
|-----------|-------------------|
| Function: | Accuracy: |
| • Depth | ±1% of full scale |
| • Timers | 1 second per day |

Dive Counter:

- DIVE/GAUGE displays Dives #1 to 24, FREE displays #1 to 99 (0 if no dive made)
- Resets to Dive #1, upon diving (after 24 hours with no dives)

Dive Log Mode:

- Stores 99 most recent DIVE/GAUGE dives in memory for viewing
- After 99 dives, adds 100th dive in memory and deletes the oldest entry (entry 1)

Altitude:

- Operational from sea level to 14,000 feet (4,270 meters) elevation
- Measures ambient pressure every 30 minutes when inactive, upon activation, every 15 minutes while activated.
- Does not measure ambient pressure when wet.
- Compensates for Altitudes above sea level beginning at 3,001 feet (916 meters) elevation and every 1,000 feet (305 meters) higher.

Power:

- Rechargeable Lithium.
- The battery is a factory replacement item and is not user servicable.

Sleep Mode (surface):

- Activates and turns the screen off when 10 minutes elapse on the surface with no button operations.
- Resume operation from Sleep Mode by pressing any button.

Battery Indication:

- Green (Good) - Green Icon displays on the Surface Main. No battery icon during the dive.
- Amber (Warning) - Amber Icon on the Surface and Dive Main screens. Brightness level will automatically be limited to 60% maximum.
- Red (Alarm) - Red Icon on the Surface and Dive Main screens. If during a dive, the message ALARM LOW BATTERY with up arrows is displayed. If on the surface, the message ALARM LOW BATT flashes until the unit shuts off. The battery must be recharged before using your i770R. Brightness level will automatically be limited to 30% maximum.

Operating Temperature:

- Out of the water - between -6.6 and 60 °C (20 °F and 140 °F).
- In the water - between -2.2 and 35 °C (28 °F and 95 °F).

NUMERIC DISPLAYS:

- Dive Number
- Depth
- FO₂ Set Point
- PO₂ Value
- Dive Time Remaining
- Time To Surface
- No Decompression Deep Stop Time
- No Decompression Safety Stop Time
- Decompression Stop Time
- DIVE/GAUGE Elapsed Dive Time
- Free Elapsed Dive Time
- Surface Interval Time
- Free Surface Interval Time
- Time to Fly & Desaturate
- Temperature
- Time of Day
- Free Countdown Timer
- Violation Countdown Timer

Range:

0 to 24
 0 - 100 M (0 - 330 FT)
 Air, 21 to 100 %
 0.00 to 5.00 ATA
 0 to 99 min, display 99 if >99 min
 0 to 99 min, display - - if >99 min
 2:00 to 0:00 min:sec
 5:00 to 0:00 min:sec
 0 to 999 min
 0 to 999 min
 0:00 to 9:59 min:sec
 0:00 to 23:59 hr:min
 0:00 to 59:59 min:sec,
 then 1:00 to 23:59 hr:min
 23:50 to 0:00 hr:min*
 * starting 10 min after the dive
 -18 to 60° C (0 to 99° F)
 if outside of temp range, then displays - -
 0:00 to 23:59 hr:min
 9:59 to 0:00 min:sec
 23:50 to 0:00 hr:min

Resolution:

1
 0.1 M (1 FT)
 1 %
 0.01 ATA
 1 minute
 1 minute
 1 second
 1 second
 1 minute
 1 minute
 1 second
 1 minute
 1 second
 1 minute
 1 minute
 1°
 1 minute
 1 second
 1 minute

Max Functional Depth:

- DIVE/GAUGE/FREE

Limit:

100 M (330 FT)

FCC ID: MH8A

FCC COMPLIANCE:

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1.) this equipment may not cause harmful interference, and 2.) this equipment must accept any interference received, including interference that may cause undesired operation.

FCC INTERFERENCE STATEMENT:

This equipment has been tested and found to comply with the limits for an Intentional Radiator, a Class B Digital Device, pursuant to Part 15 of FCC Rules, Title 47 of the Code of Federal Regulations. These rules are designed to provide reasonable protection against harmful interference in a commercial or residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed

and used in accordance with the instructions, may cause harmful interference to radio communications.

There is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician.

⚠ CAUTION: Changes or modification to this unit not expressly approved by Aqua Lung International could void the user's authority to operate the equipment.

ABBREVIATIONS/TERMS

ACT = Activation	LAST = Previous (dive)
AL = Alarm	M = Meters (depth)
ALT = Alternate	MET = Metric
ASC Bar Graph = Ascent Rate	MIN = Minutes (time)
ATA = Standard Atmosphere (unit)	MOD = Maximum Operating Depth
AUD = Audible Alarm	N2 = Nitrogen
BATT = Battery	N2 Bar Graph = Tissue Loading Bar Graph
CDT = Countdown Timer	NDL = No Decompression Limit
CF = Conservative Factor	NO DECO = No Decompression (DTR)
DA = Depth Alarm (Free Dive)	O2 = Oxygen
DCS = Decompression Sickness	O2 TIME = Oxygen Time Remaining (DTR)
DECO = Decompression	O2 SAT = Oxygen Saturation
DFLT = Default	PC = Personal Computer (download)
DS = Deep Stop	PLAN = Dive Planner
DTR = Dive Time Remaining	PO2 = Partial Pressure of O2 (ATA)
EDT = Elapsed Dive Time	RTI = Repeating Time Interval
EL/ELEV = Elevation (altitude)	SAFE = Safety (stop)
FLY = Time To Fly	SAT = Desaturation Time
FO2 = Fraction of Oxygen (%)	SEA = Sea Level
FORM = Format (date, time)	SEC = Seconds (time)
FREE = Free Dive Mode	SN = Serial Number
FT = Feet (depth)	SR = Sample Rate
GAU/GAUG/GAUGE = Digital Gauge Dive Mode	SS = Safety Stop
GTR = Gas Time Remaining	SURF/SURF-T = Surface Time
H2O = Water	TTS = Time To Surface
HIST = History	VIO/Viol = Violation
IMP = Imperial (measure)	

EUROPEAN UNION DIRECTIVES

- EC type examination conducted by: SGS United Kingdom Ltd, Weston - super - Mare, BS22 6WA, UK, Notified Body No. 0120.
- HP gas pressure sensing components are in conformity with EN250:2014 - Respiratory equipment - open-circuit self-contained compressed air diving apparatus - requirements, testing and marking – clause 6.11.1 Pressure Indicator. EN 250:2014 is the standard describing certain minimum performance requirements for SCUBA regulators to be used with air only sold in EU. EN250:2014 testing is performed to a maximum depth of 50 M (165 FSW). A component of self-contained breathing apparatus as defined by EN250:2014 is: Pressure Indicator, for use with air only. Products marked EN250 are intended for air use only. Products marked EN 13949 are intended for use with gases containing more than 22% oxygen and must not be used for air.
- Depth and time measurements are in conformity with EN13319:2000 - Diving Accessories - depth gauges and combined depth and time measuring devices
- EN 12021 is a standard that specifies the allowable contaminants and component gasses that make up compressed air. This is the equivalent of the USA Compressed Gas Association's Grade E air. Both standards allow very small amounts of contaminants that are not harmful to breathe, but can cause a problem if present in systems using gasses with a high percentage of oxygen.
- Electronic instruments are in compliance with Directive 2004/108/EC Electromagnetic compatibility (EMC) EN 61000 part 6-1: Generic Standards - immunity for residential, commercial and light-industrial environments

AQUA LUNG DISTRIBUTORS

ALGERIA

Neptune Store Eurl
Lot Zagami, N 15 Ain Benian
Alger, 16202
Tel: +213 (21) 30 36 40
eurlneptunestore@orange.fr

ARGENTINA

La Casa Del Buceador
Av. Cordoba 1859
Capital Federal,
Buenos Aires, 1120
Tel: +54-11- 4811-2276
buceador@buceadoronline.com
www.buceadoronline.com

Pino Sub S.A.
Av. Hipólito Yrigoyen 200
Puerto Madryn,
Chubut, 9120
Tel: +54-2965- 471649
buceador@buceadoronline.com
www.pinosub.com

ARUBA

Red Sail Sports Aruba NV
J.E. Irausquin Blvd. 83
Palm Beach
Tel: (297) 586-1603
dive@redsailaruba.com
redsailaruba.com

Pelican Adventures, Inc.
J.E. Yrausquin Blvd. 232
Oranjestad
Tel: (297) 587-2302
pelican-aruba@setarnet.aw

Aqua Windies
Dr Horacio E Oduber Blvd. 4
Horacio
Tel: (297) 583 5669
rene@setarnet.aw
www.aquawindies.com

AUSTRALIA

Aqua Lung Australia
8 Weddel Court, Unit 2,
Laverton North Victoria 3026
Tel: +61 3 9369 1992
salesaqq@aqualung.com
aqualung.com/au

BAHAMAS

Viva Diving
Club Viva Fortuna
Freeport
F-42398
Tel: (242) 373-4000
vivadive@batelnet.bs
vivaresorts.com

Bahama Divers Limited
Nassau Yacht Haven Marina
East Bay Street Box 5004
Nassau
Tel: (242) 393-6054
bahadiver@bahamas.net.bs
bahamadivers.com

Stuart Cove's Dive South Ocean
South, West Bay Street
P.O. Box CB 13137
Nassau
Tel: (800) 879-9832
info@stuartcove.com
stuartcove.com

Unexso
P.O. Box F42433
Freeport
Tel: (800) 992-3483
info@unexso.com

BEQUIA

Bequia Dive Adventures
P.O. Box 129, Bequia
St. Vincent & the Grenadines
West Indies
Tel: (784) 458-3826

adventures@vincysurf.com
bequiadiveadventures.com

BELARUS

Sub Life
220012 K Chernogo Str
Minsk, 31
Tel: +375 172 809 999
admin@aqualung.by

BELGIUM

Aqua Lung France
1ere Avenue, 14eme Rue, BP 148
Carros cedex, 06513
Tel: 33-0-4-92-08-28-46
contact-france@aqualung.fr
www.aqualung.com/fr

BELIZE

Sea Sports Belize
83 North Front Street
Belize City
Tel: +501-223-5505
info@seasportsbelize.com
www.seasportsbelize.com

BERMUDA

H. Davidson & Sons LTD.
Hamilton
Tel: (441)292-3839
cesardb@ibl.bm

Fantasea Bermuda, Ltd.
#5 Albuoy's Point
Hamilton
Tel: 441-238-1833
info@fantasea.bm
www.fantasea.bm

BONAIRE

Carib Inn S-2425
J A Abraham Blvd 46
P.O. Box 68
Kralendijk
Tel: (599) 717-8819
bb@caribinn.com
caribinn.com

BRAZIL

Yamazery Comercio e Servico
Ltda. (Military Only)
Rue Filinto de Almeida N° 62, Cosme
Velho-Rio de Janeiro, RJ.
CEP 22241-170
Tel: +55 (21) 2558-6926
yamazery@terra.com.br
yamazery.com.br

Mar A Mar Mergulho
(Dive Store)
Rua Piaui, 1714
Belo Horizonte, MG
30150-321
Tel: +55 (31) 3225-0029
www.maramar.com.br

BRITISH VIRGIN ISLANDS

Dive Tortola
Prospect Reef Resort
Tortola, BVI
Tel: (800) 353-3419
diving@divetortola.com

Kilbrides Sunchaser Scuba, Ltd.
P.O. Box 46, Bitter End Yacht Club
Virgin Gorda, BVI
Tel: (284) 495-9638
suncuba@surfbvi.com

Sail Caribbean Divers
Hodges Creek Marina
East End, Tortola BVI
Tel: (284) 495-1675
info@sailcaribbeandivers.com
www.sailcaribbeandivers.com

BRUNEI DARUSSALAM

Planet Scuba Sdn Bhd
L-3-2, Block L, Plaza Damas, No 60,
Jalan Sri Hartamas 1,

50480, Kuala Lumpur, Malaysia
Tel: +60 3 6203 3366
info@planetsscuba.com.my
www.planetsscuba.com.my
facebook.com/planetsscubamalaysia

BULGARIA

Dive Tec Ltd
SUHA REKA BL 96 Vh. D, Ap 21
Sofia, 1517
Tel: +359 (888) 513 933
marketing@divetec-bg.com
divetec-bg.com

CAMBODIA

Aquamaster (Thailand) Co., Ltd.
43/30-32, Moo 5
T. Rawai, Phuket, 83130
Tel: +66 76-281-227
info@aquamaster.net
www.aquamaster.net

CAYMAN ISLANDS

Divers World, Ltd.
P.O. Box 917 GT Seven Mile Shops
Grand Cayman
Tel: (345) 949-8128
divworld@candw.ky

Red Sail Sports
Seven Mile Beach West Bay Road
Grand Cayman
Tel: (345) 945-5965
info@redsailcayman.com

Reef Divers at Cayman Brac
Brac Reef Beach Resort West End
Cayman Brac
Tel: (345) 948-1642
reefdive@candw.ky
www.reefdiverscaymanbrac.com

Reef Divers at Little Cayman
Little Cayman Beach Resort
Little Cayman
Tel: (345) 948-1070
rdiver@candw.ky

CHILE

Aero Services
(Military Only)
Abadia 212, Las Condes
Santiago
Tel: +56-2-895 0665
info@aeroservice.cl
www.aeroservice.cl

Dimarsa Industrial
Los Olivillos N° 268
Puerto Montt
Tel: +56-65-292750
centrobuceo@dimarsa.cl
dimarsa.cl

Dimarsa Industrial
Paicavi 1801
Concepción
Tel: +56-41-2790045
centrobuceo@dimarsa.cl
dimarsa.cl

Dimarsa Industrial
Chillan N° 117
Puerto Montt
Tel: +56-65-292000
centrobuceo@dimarsa.cl
dimarsa.cl

Dimarsa Industrial
Libertad N° 605
Ancud
Tel: +56-65-628045
centrobuceo@dimarsa.cl
dimarsa.cl

Dimarsa Industrial
Panamericana Norte N° 1772
Castro
Tel: +56-65-534416
centrobuceo@dimarsa.cl
dimarsa.cl

Dimarsa Industrial
Ladrilleros N° 247
Quellón
Tel: +56-65-683290
centrobuceo@dimarsa.cl
dimarsa.cl

Dimarsa Industrial
Teniente Merino N° 945
Puerto Aysén
Tel: +56-65-330222
centrobuceo@dimarsa.cl
dimarsa.cl

CHINA

ODE Sports Co., Ltd
Nick Garden Square (Jordan Build-
ing).
560 Hong Xu Rd, Building # 6,
No. 102,
MinHang district, Shanghai City,
China PRC. 201103
Tel: +86 21 5265 3078
www.odesports.com

COLOMBIA

Aqua Pro
Carrera 31, No. 91-75, La Castellana
Bogota, Colombia
Tel: +57 (1) 635-7823
aquapro@aquacenterdiving.com

COSTA RICA

Mundo Acuatico
San Pedro, Montes de Oca
San Jose
Tel 1: (506) 2224-9729
Tel 2: (506) 2225-3669
ventas@mundoacuatico.cr
www.mundoacuatico.cr

Oceans Unlimited Costa Rica
50mts este de Iguana Tours,
Quepos
Tel: (506)777-3171
info@oceansunlimitedcr.com
www.scubastoreandmore.net

CURACAO

Caribbean Sea Sports
Curacao Marriott Beach Resort
Willemstad
Tel: (599) 9-4622620
css@cura.net

Scuba Store & More
Schottegatweg Oost 173
Willemstad
Tel: (599) 9-738 6640
info@scubastoreandmore.net
www.scubastoreandmore.net

CYPRUS

Mercury Divers Co., Ltd.
29 Franklin Roosevelt Avenue,
"Orphanides House"
P.O. Box 50469
Limassol, 3605
Tel: 00357 25-877933
mercury@mercury.com.cy
www.mercury.com.cy

CZECH REPUBLIC

Delphin Sub
U Kaplicky 2550
Ceska Lipa
47001
Tel: +420 487 834 370
tkacik@delphinsub.cz
www.delphinsub.cz

DENMARK

Aqua Lung GmbH
Josef-Schüttler-Str. 12
Singen, Germany
D - 78224
Tel: +49-7731-9345-0
info@aqualung.de
www.aqualung.de

DOMINICAN REPUBLIC

Northern Coast Aquasports, S.A.
8 Pedro Clisante, El Batey
Sosua, Puerto Plata
Tel: (809) 571-1028
northern @codetel.net.do
northerncoastdiving.com

Neptuno Dive Center
Hotel Decameron, Juan Dolio
San Pedro De Macoris
Tel: (809) 526-2425
coltrop @codetel .net.do
neptuno dive.com

Pelicano Sport
Hotel LTI Punta Cana Beach Resort
Carretera Arena Gorda
Punta Cana, Bavaro
Tel: (809) 688-6820
pelicanosport @hotmail.com

Treasure Divers
Don Juan Beach Resort
Boca Chica
Tel: (809) 523-5320
treasuredivers@hotmail.com

Scubafun S.A.
Calle Principal 28
Bayahibe La Romana
Tel: (809) 833-0003
scubafun_de@yahoo.de

Big Blue Swiss Diving School
Sosua Beach
Sosua, Puerto Plata
Tel: (809) 571-3368
a.marcel @codetel .net.do

Mike's Diving Services
Santo Domingo
Tel: (809) 566-3483
dive @codetel .net.do

DOMINICA

Cabrits Dive Centre
Picard Estate
Portsmouth Commonwealth of
Dominica
West Indies
Tel: (767) 445-3010
cabritsdive@cwdom.dm
cabritsdive.com

ECUADOR

Subacqua Deporte
C.C.Plaza Quillocal 27
Guayaquil
Tel: +593-4-229-0088
info@subacquadeporte.com
www.subacquadeporte.com

Comerica, SA. - (Military Only)
CDLA La Garzota MZ. 5
Villa 7
Guayaquil
Tel: +593-4-249-157
Comerica@gye.satnet.net

EGYPT

Aqua Lung Egypt
Villa 22/A, Magawish Area
Airport Road, Hurgada
Tel: +20 (0) 65 346 9034
info@aqualung-egypt.com
www.aqualung.com/eg

EL SALVADOR

Oceanica Escuela de Buceo
Calle Circunvalación #17B
Colonia Escalón
San Salvador
Tel: +503-263-6931
oceanica@salnet.net

ESTONIA

Aqua Lung France
1ere Avenue, 14eme Rue, BP 148
Carros cedex, 06513
Tel: 33-0-4-92-08-28-46
contact-france@aqualung.fr
www.aqualung.com/fr

FINLAND

Ursuk Oy
Teijonkatu 3
Turku, Finland
FI-20750
358-2-274-3550
info@ursuk.com
www.ursuit.com

FRANCE

Aqua Lung France
1ere Avenue, 14eme Rue, BP 148
Carros Cedex, 06513
Tel: 33-4-92-08-28-88
contact-france@aqualung.fr
www.aqualung.com/fr

FRENCH POLYNESIA

Tahiti Sport SA, Nautisport
BP 62, Papeete
98713
Tel: 689-505-959
nautispo@mail.pf

GERMANY/AUSTRIA/DENMARK

Aqua Lung GmbH
Josef-Schüttler-Str. 12
Singen
D - 78224
Tel: +49-7731-9345-0
www.aqualung.com/de

GREECE

Nik Kartelias & Co OE
3 Mikras Asias Street
New Phaliro, Piraeus
18547
Tel: +30 210 482 58 87
kartelias@kartelias.gr
www.kartelias.gr

GRENADA

Ecodive
Coyaba Beach Resort
Box 336
St George's
98713
Tel: (473) 444-1046
ed@ecodive andtrek.com

GUAM

Micronesians Divers Association, Inc.
856 North Marine Drive
Piti, 96915
Tel: 671-477-7253
mda@mdaguam.com
www.mdaguam.com

GUATEMALA

Pana Divers
Ave. Las Americas 16-39 Z.14
Guatemala, 01014
Tel: 337-2965
panadivr@terra.com.gt
www.panadivers.com

Water Quest

6 Ave. 11-35 zona 9.
Guatemala
Tel: 2363-4476 /77
pepescuba@hotmail.com
www.pepescuba.com.gt

HONDURAS

Mayan Divers
Mayan Princess Beach Resort
West Bay, Roatan
Tel: (504) 445-5050 ext. 326
info@mayandivers.com

Utila Dive Centre

Utila Dive Centre-Mango Inn
Utila, Bay Islands
34201
Tel: (504) 425-3326
www.utiladivecentre.com

Barefoot Divers

Roatan
Bay Islands
Tel: (504) 455-6235
Dive@BarefootCay.com
www.barefootdiversroatan.com

Captain Morgan's Dive Centre

Centro
Utila, Bay Islands
34201
Tel: (504) 425-3349
divingutila@gmail.com
www.divingutila.com

HONG KONG

ODE Sports Co., Ltd
Nick Garden Square (Jordan Building),
560 Hong Xu Rd, Building # 6,
No. 102,
MinHang district, Shanghai City,
China PRC. 201103
Tel: +86 21 5265 3078
www.odesports.com

HUNGARY

DIVEX Búvár Szakáruház
1077 Budapest
Rottenbiller utca 34
Budapest
Tel: +36 (1) 368-0098
info@divex.hu
www.divex.hu

INDIA

Planet Scuba India Pvt Ltd
1315, Double Road, Indiranagar,
Eshwara Layout,
Bangalore - 560038
Tel: +91-80-41573939
Mobile: +91-9901700500
sales@planetsscubaindia.com
www.planetsscubaindia.com

INDONESIA

Divemasters Indonesia
Jl. Banka Raya No. 39A Pela
Jakarta Selatan
12720
Tel: +62-21-719-9045
sales@divemasters.co.id
www.divemasters.co.id

IRAN

Darya Kav Co.
No 22, Asgari Street, Sepand Street,
Aghdasiyeh
Tehran, Tehran
Tel: +98-21-261-20-717
info@daryakav.com
www.daryakav.com

ISRAEL

Tactics X Ltd.
(Military Only)
Hermom Street, P.O. Box 16
Tel-Mond, 40600
Tel: +972 (09) 796-6262
tactoded@netvision.net.il

Sheba Yam Ltd.

Hata' Asia 2
Alfey Menashe
44851
Tel: +972 97 94 72 43
shebayam@zahav.net.il

ITALY

Technisub S.p.a.
Via Gualco 42, Genova
16165
Tel: 39-010-54451
info@technisub.com
www.technisub.com

JAPAN

Aqua Lung Japan
2229-4 Nurumizu
Atsugi, Kanagawa
243-0033
Tel: +81-46-247-3222
aqualung@aqualung.co.jp
www.aqualung.com/jp

KOREA

Giant Systems, Inc.
2F Nokbun Plaza, 71-27 Nokbun-
Dong,
Eunpyung-Gu, Seoul
122-828
Tel: +82-2-387-3503
info@divegiant.com
www.aqualung.com/kr

LATVIA

Aqua Lung France
1ere Avenue, 14eme Rue, BP 148
Carros cedex, 06513
Tel: 33-0-4-92-08-28-46
contact-france@aqualung.fr
www.aqualung.com/fr

LEBANON

Kyriakos Freres
Ain el Mraisseh, BP 8389
Beyrouth
Tel: 961-1-362752
kyriakos@kyriakos-lb.com
www.kyriakos-lb.com

LITHUANIA

Ursuk Oy
Teijonkatu 3
Turku, Finland
FI-20750
Tel: 358-2-274-3550
info@ursuk.com
www.ursuit.com

MALAYSIA

Planet Scuba Sdn Bhd
L-3-2, Block L, Plaza Damas, No 60,
Jalan Sri Hartamas 1,
50480, Kuala Lumpur, Malaysia
Tel: +60 3 6203 3366
info@planetsscuba.com.my
www.planetsscuba.com.my
facebook.com/planetsscubamalaysia

MALDIVES

Aqua Lung France
1ere Avenue, 14eme Rue, BP 148
Carros cedex, 06513
Tel: 33-0-4-92-08-28-46
contact-france@aqualung.fr
www.aqualung.com/fr

MALTA

M&A Ltd
Casfen Court, Triq Sir Luigi Preziosi
Bugibba
SPB2718
Tel: +356-21 585 065
info@mandamalta.com
www.mandamalta.com

MEXICO

Amerimex Intl. Co. Inc.
(Military Only)
Seneca 330, 2em Piso
Colonia Polanco, Mexico, DF. 11550
Tel: +52 (5) 280-2113
egilad@amerimex-intl.com

Aqua Safari

Rafael Melgar 427
Cozumel, Q. Roo
77600
Tel: +52 (987)872-0101
www.aquasafari.com

Artisub

Pitagoras # 445-ANarvarte,
Mexico, D.F.
03020
Tel: +52 (55) 5639-1049
www.artisub.com

Cetus Dive Center

Av. Copilco No. 300, 04360
Mexico City
04360
Tel: +52(55)5659-6284
cetusdive@prodigy.net.mx

Escafandra Dive & Travel Center
Los Pinos #106 Col. Santa Engracia
Garza Garcia, N.L.
66267

Tel: +52 (81) 8335-0136
www.escafandra.com

Oceanos Expediciones & Buceo
Av. Vallarta 3233 Local 1F y 14F
Guadalajara, Jal
44110
Tel: +52(33)3915 8107
www.oceanos.com.mx

Phocear Rivera Maya
1a. avenida norte, entre calle 10 y 1
Playa del Carmen,
Q. Roo
Tel: +52 (984) 87-31-210
www.phocearivieramaya.com

Prodiva, S.A. DE C.V.
Adolfo Rosado Salas No. 198
Cozumel, Q. Roo
77600
Tel: +52 (987)872-4123
www.prodivicozumel.com

MOROCCO

Aqua Lung France
1ere Avenue, 14eme Rue, BP 148
Carros cedex, 06513
Tel: 33-0-4-92-08-28-46
contact-france@aqualung.fr
www.aqualung.com/fr

NETHERLANDS

AmilcoSports
Energieweg 27,
4691 SE Tholen,
Tel: +31 166 601 060
www.amilcosports.nl

NEW ZEALAND

Aqua Lung Australia
8 Weddel Court, Unit 2
Laverton North,
Victoria, 3026
Tel: +61 3 9369 1992
salesaqz@aqualung.com
aqualung.com/au

NORWAY

SafeNor AS
Bromsveien 5
N-3183 HORTEN
Norway
Tel: +47 974 78 999
post@safenor.no
Invoice from you to us: invoice@
safenor.no
or by post to address above
VAT no: 911 876 698
Contact person:
Rune Andresen
Mobile: +47 909 33 501
E-mail: rune@safenor.no
www.safenor.no

OMAN

Al Boom Diving
P.O. Box 30439
Dubai
Tel: (971-4) 3422993
abdiving@emirates.net.ae
www.alboomdiving.com

PALAU

Fishn Fins Palau
P.O. Box 964
Koror
96940
Tel: 680-488-2637
www.fishnfins.com

Sam's Tours

P.O. Box 7076
Koror
96940
Tel: 680-488-7267
www.samstours.com

NECO Marine

P.O. Box 129
Koror
96940
Tel: 680-488-1755
www.necomarine.com

PANAMA

Scubapanama
Urb. Herbruger, ave.
6ta Norte y calle 62A #29B
Panama
Te: (507) 261-4064
www.scubapanama.com

PERU

Fantasy S.A.C.
Mz R Lote 23 Asoc., Los Nisperos
San Martin de Porres, Lima
15108
Tel: +51 (1) 5744939
Informes@FantasySacPeru.com

www.fantasysacperu.com
Marine Group
Chamochumbi N°180
Urb. Maranga
San Miguel, Lima
15087
Tel: +51(1) 451-5167
marinegroup@terra.com.pe
marines@FantasySacPeru.com

Perudivers
Av. Defensores del Morro (ex. Huay-
las) 175
Chorrillos L-09, Lima
15064
Tel: +51 (99) 720-5500
info@perudivers.com
www.perudivers.com

San Bartolo Divers
Av. Bahia Sur 150 San Bartolo, Lima
Tel: +51 (99)917-1917
info@sbdivers.com
www.sbdivers.com

PHILIPPINES

Dive Supply Subic, Inc.
Unit 101 Joncor II Bldg.
1362 A. Mabini St.
Ermita, Manila
1000
Tel: +632 521-0433
sales@aquaventurewhitetip.com
www.aquaventurewhitetip.com

POLAND

Ocean Pro Systemy Nurkowe
ul. Polna 20, 55-010 Smardzow
gm. Sw. Katarzyna
VAT Nr: PL 8991287129
Tel: +48 71 3116464
biuro@oceanpro.com.pl
www.oceanpro.com.pl

PORTUGAL

Aqua Lung España S.L.
Avenida de la Antigua Peseta, 145
Poligono Industrial las Atalayas
03114 Alicante
Tel: 00-34-965127170
marketing@aqualung.es
www.aqualung.com/es

PUERTO RICO

RT 110, KM 10
Aguadilla
00604
Tel: (787) 890-6071
aquadica@caribe.net

El Pescador Dive Shop
Barrio Santa Maria, P.O. Box 136
Vieques
00765
Tel: 787-741-1146
pescador1a@hotmail.com

La Casa del Buzo
Avenida Jesus T. Pinero, #293
Rio Piedras
00927
Tel: (787) 758-2710
buzo3@tld.net

Paradise Scuba
Carretera 100 KM 5.7
Cabo Rojo
00623
Tel: (787) 255-0305
paradisescubapr@yahoo.com

<p>Puerto Rico Technical Diving Center Carr. 107, Km 4.0 Avenida, Pedro Albizu Campos Aguadilla, 00603 Tel: (787) 997-DIVE(3483) prtekdivingcenter@hotmail.com technicaldivingpr.com</p> <p>Sea Ventures Dive Center Marina Puerto Del Rey Highway 3, Km. 51.2 Fajardo, 00738 Tel: (800) 739-3483 seaventures@divpuertorico.com divpuerto rico.com Scuba Dogs Calle Dr. Ramos Mimoso #6, Garden Hills Guaynabo, 00966 Tel: (787) 783-6377 scubadogs@yunque.net</p> <p>Sea Ventures Dive Center Marina Puerto Del Rey Highway 3, Km. 51.2 Fajardo, 00738 Tel: (800) 739-3483 seaventures@divpuertorico.com divpuerto rico.com</p> <p>Scuba Dogs Calle Dr. Ramos Mimoso #6, Gar- den Hills Guaynabo 00966 Tel: (787) 783-6377 scubadogs@yunque.net</p> <p>United States Coast Guard Exchange Old San Juan USCG Base #5 La Puntilla Final Street San Juan 00901-1800 Tel: (787) 289-8665</p> <p>Vieques Dive Company Vieques Tel: 443-206-3770 viequesdivers@gmail.com www.viequesdivers.com</p>	<p>Tel: 011-599-545-3213 info@thescubashop.net thescubashop.net</p> <p>SAIPAN Speedy Turtle Beach Road Saipan MP 96950 Tel: 670-234-6284 speedyturtle.com</p> <p>Aqua Connections PMB 292, BOX 10000 Saipan MP 96950 Tel: 670-233-3304 saipan-aquaconnections.com</p> <p>S2 Club Saipan P.O. Box 5739 CHRB Saipan MP 96950 Tel: 670-322-5079 www.s2club.net/saipan</p> <p>SAUDI ARABIA Red Sea Divers P.O. Box 8787 Jeddah 21492 Tel: 966-2-660-6368 redseadivers@arab.net.sa</p> <p>SINGAPORE CMP Technologies 1 Ubi View #03-16 Focus One Singapore 408555 Tel: +65 6382 0060 sales@opstechnologies.com www.aqualung.com/sg</p> <p>Sports Center Block 2 Beach Road, #01-4801 Singapore 190002 Tel: +65 6296 0939 Fax: +65 6296 9576 www.sportscenter.com.sg Contact: Swee Kuan</p> <p>Friendly Waters Seasports 20 Upper Circular Road THE RIVERWALK, #B1-22 Singapore 058416 Tel: +65 6557 0016 Fax: +65 6557 0018 Mbl: +65 9022 5552 info@friendlywaters.com.sg www.friendlywaters.com.sg Contact: Dave Yiu</p> <p>SLOVAKIA Pro-Dive s.r.o. Gessayova 16 Bratislava, 85103 Tel: +421 (2) 624 11 972 laco@pro-dive.sk</p> <p>SLOVENIA Divestrong D.O.O. Staniceva Ulica 017 Ljubljana, 1000 Tel: +386 (40) 626 526 matko.mioc@divestrong.si</p> <p>SOUTH AFRICA Manex & Power Marine (Pty) Ltd. 5 Industry St. Paardenland, 7405 Tel: 27 (0) 21-511-7292 manex@manex.co.za www.manex.co.za</p> <p>SPAIN Aqua Lung España S.L. Avenida de la Antigua Peseta, 145 Poligono Industrial las Atalayas 03114 Alicante Tel: 00-34-965127170 marketing@aqualung.es www.aqualung.com/es</p> <p>SWEDEN Ursuk Oy Teijonkatu 3</p>	<p>Turku, Finland FI-20750 Tel: +358 20 779 8850 info@ursuk.com www.ursuk.com/se</p> <p>SWITZERLAND Aqua Lung GmbH Josef-Schüttler-Str. 12 Singen D - 78224 Tel: +49-7731-9345-0 info@aqualung.de www.aqualung.com/de www.aqualung.com/at</p> <p>TAIWAN Subpolar Ent., Co., Ltd. 5F #29-1 Lane169 Kang-Ning St., Hsi-Chih Dist, New Taipei City Taiwan, 221 info@nettycoon.com.tw www.nettycoon.com.tw</p> <p>THAILAND Aquamaster (Thailand) Co., Ltd. 43/30-32, Moo 5 T. Rawai, Phuket, 83130 Tel: +66 76-281-227 info@aquamaster.net www.aquamaster.net</p> <p>TURKEY Demas Spor Hamle Sokak n° 7/1 Goztepe, Istanbul 81080 Tel: +90 216 411 59 75 info@demasspor.com www.demasspor.com</p> <p>TURKS & CAICOS ISLANDS Oasis Divers Grand Turk PO Box 137 Grand Turk Tel: (649) 946-1128 oasisdiv@tcway.tc oasisdivers.com</p> <p>Caicos Adventures Diving PO Box 47 Providenciales Tel: (649) 941-3346 divucrzy@tcway.tc tcdiving.com</p> <p>Dive Provo Unit 101 Ports of Call Shopping Centre Providenciales Tel: (649) 946-5029 diving@diveprovo.com diveprovo.com</p> <p>Flamingo Divers PO Box 322 Next to Provo Marine Biology Educ Center Providenciales Tel: (800) 204-9282 flamingo@provo.net</p> <p>UKRAINE Company DIVEX Ltd. PR. GAGARINA2/35, APP. 168 Kyiv, Ukraine, 02105 Tel: + 380 44 501 29 11 mail@aqualung.in.ua www.aqualung.in.ua</p> <p>U.S. VIRGIN ISLANDS Admiralty Dive Center Holiday Inn Veterans Drive, Suite 270 St Thomas, 00802 Tel: (888) 900-3483 admiralty@viaccess.net admiraltydive.com</p> <p>Anchor Dive Center Salt River Marina P.O. Box 5588 Sunny Isles St Croix, 00823-5588 Tel: (340) 778-1522 anchordivecenter@juno.com anchordivestcroix.com</p>	<p>Cruz Bay Watersports Co. 18-38 Estate Enighed St John, 00830 Tel: (340) 776-6234 info@divestjohn.com divestjohn.com</p> <p>Dive Experience, Inc. PO Box 4254, 40 Strand Street Christiansted, St Croix, 00820 Tel: (340) 773-3307 divexp@viaccess.net divexp.com</p> <p>Hi-Tec Watersports Charlotte Amalie St. Thomas, 00803 Tel: (340) 774-5650 hitecwatersports@hotmail.com</p> <p>Patagon Dive Center The Ritz-Carlton St Thomas, 00802 Tel: (340) 775-3333 info@patagondivecenter.com patagondivecenter.com</p> <p>Red Hook Dive Center 6100 Red Hook Qtrs. E1-1, St. Thomas, 00802 Tel: 340-777-3483 info@redhookdivecenter.com www.redhookdivecenter.com</p> <p>Waterworld Outfitters Inc. 9007 Havensite Suite C St Thoma, 00802 Tel: (340) 774-3737 www.islands.vi</p> <p>UNITED ARAB EMIRATES Al Boom Diving P.O. Box 30439, Dubai Tel: (971-4) 3422993 abdiving@emirates.net.ae www.alboomdiving.com</p> <p>UNITED KINGDOM Apeks Marine Equipment Ltd. Roman Road Industrial Estate Blackburn Lancashire BB1 2BT Tel: 01254 692200 info@apeks.co.uk www.aqualung.com/uk</p> <p>UNITED STATES OF AMERICA Aqua Lung America 2340 Cousteau Court Vista, CA 92081 Tel: +1 (760) 597-5000 support@aqualung.com www.aqualung.com Aqua Lung Pacific 99-1093 Iwaena Street, Unit E Aiea, HI 96701 Tel: +1 (888) 877-5733 pacsupport@aqualung.com www.aqualung.com</p> <p>VENEZUELA Chichiriviche Divers C.A. Av. Don Bosco, Qta. ABC, No. 10 La Florida, Caracas Tel: (212) 731-1556 info@chidivers.com.ve www.chidivers.com.ve Frogman Dive Center C.C. Bolívar, Local 3, Frente a la Plaza Bolívar, Tucacas, Edo., Falcón Tel: +58 414 340.182.4 info@frogmandive.com www.frogmandive.com</p> <p>VIETNAM Aquamaster (Thailand) Co., Ltd. 43/30-32, Moo 5 T. Rawai, Phuket, 83130 Tel: +66 76-281-227 info@aquamaster.net www.aquamaster.net</p>
---	--	---	--

AQUA  LUNG®

www.aqualung.com